

1 *Manuscript for Annual Meeting Compendium of Papers*

2 **Under-Tie Pads to Improve Track Resiliency in**
3 **Railroad Transition Zones**

4
5
6 *TRB 17-03313*

7 *TRB Committee AR050*

8
9 *Transportation Research Board 96th Annual Meeting*

10 Submitted: November 15th, 2016

11
12 Stephen T. Wilk^{1,3}, Timothy D. Stark¹, and William Moorhead²

13
14
15 *Department of Civil and Environmental Engineering¹*
16 *University of Illinois at Urbana-Champaign*
17 *205 N. Mathews Ave., Urbana, IL 61801*

18
19
20 *TRAMMCO, LLC²*
21 *501 Sharptown Road*
22 *Bridgeport, NJ 08014*

23
24
25
26
27
28
29 5,157 Words, 6 Figures = 6,359 Total Word Count

30
Stephen T. Wilk
(217) 333-7394
swilk2@illinois.edu

Timothy D. Stark
(217) 333-7394
tstark@illinois.edu

William Moorhead
(757) 356-0616
trammco@mindspring.com

³ Corresponding Author

1 **ABSTRACT**

2 Under-tie pads were installed under twenty-nine (29) ties within an existing high-speed
3 passenger bridge approach on the Northeast Corridor in an effort to alleviate reoccurring track
4 geometry problems at this transition. Anticipated benefits of under-tie pads include: (1) a
5 reduction in approach ballast and tie degradation by better distributing the load to the ballast, (2)
6 increased vibration damping, and (3) reduced contact stress between the tie and individual ballast
7 particles. After installation, the approach track geometry and behavior was measured using track
8 geometry cars and non-invasive instrumentation, e.g., video cameras and accelerometers, to
9 assess performance. These field measurements show stable track geometry after about one year
10 of traffic.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39

Keywords: Transition zone, tie support, accelerometers, video cameras, under tie pad, ballast, differential movement, settlement

1 INTRODUCTION

2 Railroad transition zones are track locations that display rapid changes in track structure such as,
3 bridge approaches, asphalt crossing, and culverts. The transition zone, i.e., approach track, often
4 experiences increased track structure degradation, settlement, and requires resurfacing to
5 alleviate reoccurring track geometry defects. For example, recent instrumentation of two high-
6 speed passenger transition zones on the Northeast Corridor shows about two (2) and fourteen
7 (14) times higher settlement rate in the approach (4.6 m/15 ft. from bridge abutment) than the
8 corresponding open track (18.3 m/60 ft. from bridge abutment) [1]. The rapid deterioration of
9 transition track geometry and the resulting required maintenance make transition zones an
10 important topic in railroad engineering.

11 Multiple mechanical factors can increase approach settlement but it is typically attributed
12 to increased loads, changes in rail elevation, and reduced-performance ballast in the approach.
13 Increased vehicle loads can appear from rapid changes in axle elevations due to differential
14 stiffness, settlement, and damping between the approach and bridge [2-4] and increased tie loads
15 are possible from uneven settlement in the approach [5] and the impact from tie-ballast gaps
16 [6,7]. Increased ballast degradation from tie-ballast gaps, increased loads, and repeated tamping
17 is also expected to degrade, weaken, and foul the ballast [8,9] while blocked drainage from
18 bridge abutments can produce wet spots, all of which reduce ballast performance and can lead to
19 increased ballast settlement rates [10].

20 Recent transition zone solutions have focused on viewing the transition zone as a system
21 and balancing approach and bridge stiffness and settlements [11] and creation of a Balance Sheet
22 to assist engineers with understanding the different sources of transient and permanent
23 displacements [11]. An example involves the installation of a ballasted bridge deck and reducing
24 approach settlement with confining wing walls, hot-mixed asphalt (HMA), geoweb, and/or
25 geogrid underlayment. Variations include further reduction in bridge stiffness by installing rail
26 pads or ballast mats [12] or gradually increasing approach stiffness with a transition wedge [13].
27 An ideal solution should be effective in reducing differential settlement by balancing the
28 transient and permanent displacements while remaining cost-effective and easy to install.

29 Under-tie pads (UTPs) were installed on twenty-nine (29) ties immediately before an
30 existing high-speed passenger railway bridge to evaluate their effectiveness at reducing
31 differential settlement between the bridge, approach, and open track. UTPs are relatively
32 inexpensive and easy to install compared to track/tie replacement and the mechanical benefits
33 include reduced tie load from improved distribution of the wheel load to the ties and a “cushion”
34 layer between the tie and ballast to reduce tie and ballast contract stress and degradation. While
35 the UTP “softens” the approach instead of stiffening it, the reduction in ballast degradation and
36 settlement is expected to exceed the negative effects of increased stiffness differential between
37 the bridge and approach. To assess transition performance after installation, periodic track
38 geometry measurements have been made along with one extensive instrumentation effort about a
39 year after UTP installation.

40

41 UNDER-TIE PADS

42 Railroad track geometry problems directly result from the permanent movement of the
43 underlying track substructure. At transition zones, this typically occurs from one or more of the
44 following reasons: (1) densification, lateral migration, and/or degradation of the ballast, (2)

1 infiltration of ballast into the subgrade, and/or (3) continual settlement of an inadequately
2 compacted or consolidated subgrade [8,14]. Previous measurements at this bridge transition zone
3 show the majority of settlement occurred within the ballast layer because of the long service life
4 of the subgrade fill. As a result, a strong correlation was found between ballast settlement and
5 tie-ballast gap height [1,15]. Therefore, reductions in ballast settlement is desirable at this
6 location but mitigating or reducing all three of these factors is necessary for minimizing
7 transition zone maintenance in general [11].

8 Ballast settlement is a complicated process in which the structural behavior is dependent
9 on multiple mechanisms occurring at the particle level, including: particle densification because
10 of little or no compaction, particle densification, gradation changes from grinding of particle
11 surfaces (Type I degradation), breakage of corners or asperities (Type II degradation), and the
12 splitting or crushing of particles (Type III degradation) [16,17]. Laboratory tests on clean ballast
13 suggest densification and Type II degradation are the primary settlement contributors [16];
14 however, analysis of in-track ballast typically show high levels of Type II and Type III
15 degradation and an influx of fouling particles, i.e., particles less than 4.75 mm (No 4 sieve), from
16 ballast degradation, infiltration of subgrade particles, or infiltration of particles from the surface
17 [18]. These high degradation levels can occur over time from fatigue, tie-ballast contact and
18 impact loads, and/or tamping [8,9]. Once high levels of ballast degradation or fouling occurs,
19 ballast settlement rates have increased from 100 to 1,000% depending on the level of
20 degradation, degree of fouling, size and plasticity of fouling particles, and levels of moisture in
21 the fouled ballast [10].

22 One anticipated benefit of UTPs in transition zones is the reduction of ballast degradation
23 and possibly densification. The UTP serves as a resilient layer at the tie-ballast interface that
24 provides a cushion between the tie and ballast and dampens track and tie vibrations. The
25 resiliency of the UTP provides a “cushion” for the ballast and can increase the contact area
26 between the UTP and ballast particles. Studies investigating the contact area between concrete
27 ties without UTPs and ballast show contact areas of only 20% [19], which indicates high particle
28 contact stresses. By increasing the contact area between the UTP and ballast, the ballast particle
29 contact stresses are reduced along with Type II and Type III ballast degradation because these
30 degradation mechanisms result from high stresses within individual ballast particles [20]. An
31 additional benefit of UTPs is they reduce tie degradation, which can result in greater tie-ballast
32 gaps, i.e., additional track movement, and reduced tie performance.

33 The installation of UTPs in transition zones is a fairly recent development in the U.S.
34 however existing studies in Europe suggest they result in reduced tie and ballast degradation
35 [21]. Class 1 railroads in the United States are beginning to install UTP in transition zones for
36 both concrete and wood ties to reduce ballast and tie degradation as described below.
37

38 **SITE LOCATION AND INSTRUMENTATION**

39 **Site Location**


40 On 31 August 2014, twenty-nine (29) UTPs were installed in the Upland Street southern Track
41 #2 bridge approach along the Amtrak Northeast Corridor near Chester, Pennsylvania. This
42 stretch of track consists of four tracks with the middle two tracks (Track #2 and #3) serving high-
43 speed passenger trains while the outside two tracks (Track #1 and #4) serve slower moving
44 commuter trains. The Upland Street Bridge is one of many closely spaced bridges that

1 experience reoccurring track geometry defects [2,4] near Chester, PA and large stretches of
2 unsupported ties in the approach [1,6]. The Upland Street northern Track #3 bridge approach was
3 instrumented in 2012 at a distance of 4.6 m (15 ft) from the bridge and exhibited settlement rates
4 of about 14 mm/year. Additionally, the transient tie displacement, i.e., “elastic” displacement
5 induced by a passing train, is about three times greater in the approach than the open track at
6 18.3 m (60 ft) from the bridge [1]. While the southern Track #2 approach was not instrumented
7 prior to under-tie pad installation, it was expected to behave similarly. The southern Track #2
8 approach is also underlain by a layer of hot-mix asphalt (HMA) roughly 0.31 to 0.36 m (12 to 14
9 inches) below the bottom of the installed UTP-fitted concrete ties. This HMA layer was installed
10 sometime in the 1990’s and discovered when the loader excavated the ballast section in
11 preparation for installing the UTP track panel on 31 August 2014. The benefit of the HMA on
12 the UTP performance at this location is not known at this time but should be considered when
13 assessing the effectiveness of the UTPs at this location.
14

15 **Instrumentation**

16 On 12 August 2015, two instrumentation teams, one from University of Illinois at Urbana-
17 Champaign (UIUC) and the other from Amtrak, installed multiple instruments to evaluate the
18 transient behavior of the southern Track #2 approach of the Upland Street bridge about one year
19 after UTP installation. The instrumentation layout is shown in Figure 1(a). The UIUC team
20 measured tie displacement at Ties #4, #5, #20, and #21 at distances 2.4, 3.1, 12.2, and 12.8
21 meters (8, 10, 40, and 42 ft.), respectively, from the bridge abutment using two high-speed video
22 cameras. To maintain consistency with previous papers at this location, the distance from the
23 bridge abutment is expressed in Imperial units [1,4]. The cameras measure displacements by
24 tracking 50 mm by 50 mm (2x2 inch) orange targets attached to the concrete ties (see Figure
25 1(b)) with imaging software developed at the UIUC [22]. The video cameras collect data at 240
26 frames per second which has been found to be adequate for high-speed passenger traffic by
27 comparing the data with LVDT measurements at the northern Track #3 approach. The Amtrak
28 team measured tie displacements at Ties #10 (6.1 meters/20 feet) and #11 (6.7 meters/22 feet)
29 with an in-house device called a “Bending Beam”, which operates similar to a dynamic
30 voidmeter [23]. The Bending Beam is shown in Figure 1(c) and measures the displacement of the
31 moment arm using calibrated strain gauges to +/-10 mm.

32 Both the UIUC and Amtrak teams also installed accelerometers (Figure 1(d)) to measure
33 tie accelerations and calculate tie displacements using double-integration techniques [22,24]. The
34 UIUC team measured tie accelerations at Ties #1, #4, #8, #14, #20, #28, #31, and #40 at
35 distances 0.6, 2.4, 4.9, 8.5, 12.2, 17.0, 18.9, and 25.0 meters (2, 8, 16, 28, 40, 56, 62, and 82 ft.),
36 respectively, from the bridge abutment using piezo-electric accelerometers. The Amtrak team
37 measured tie accelerations only at Tie #10 at a distance of 6.1 meters (20 ft.) from the bridge
38 abutment also using piezo-electric accelerometers.
39

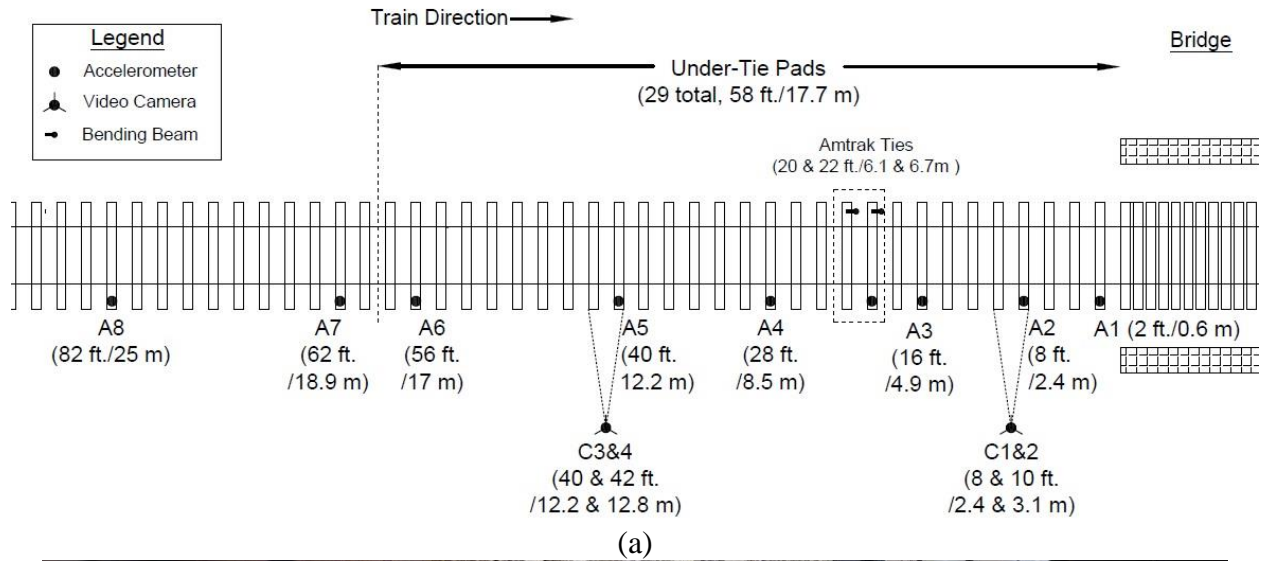

1 **Figure 1: Upland Street northern Track #2 approach with UTPs: (a) diagram showing**
 2 **instrumentation layout, (b) overview photograph of transition with orange**
 3 **targets for video cameras, (c) Bending Beam with reference stake (see arrow)**
 4 **located in crib, and (d) accelerometer attached to a concrete tie.**
 5

1 All three instruments, video cameras, Bending Beams, and double-integrated
2 accelerometers, have their unique advantages and disadvantages. The video cameras directly
3 measure tie displacement at a sampling rate of 240 Hz and camera vibrations were minimized by
4 tracking a stationary stake that is driven into the ballast between Tracks #2 and #1 in front of the
5 orange targets. The camera vibrations are accounted for by subtracting these motions from the
6 measured tie displacements. The Bending Beams directly measure tie displacement at a sampling
7 rate of 10,000 Hz but the Bending Beam is supported on a stake that is placed in the crib. As a
8 result, vertical crib displacement can result in a lower measured displacement than the video
9 cameras or accelerometer measurements. Accelerometers indirectly estimate tie displacement
10 using double-integration techniques at sampling rates of 4,000 Hz (UIUC) and 10,000 Hz
11 (Amtrak). For verification, the video camera and accelerometer results are compared at Ties #4
12 (8 ft.) and #20 (40 ft.) while the Bending Beam and accelerometer results are compared at Tie
13 #10 (20 ft.). Previous measurements at the Upland Street northern Track #3 bridge approach
14 show tie displacement frequencies range from 5 to 25 Hz, so the sampling rates of all
15 instruments are considered sufficient, which is verified in subsequent sections.


16 The second transient behavior metric is tie acceleration. Accelerations are measured
17 because accelerations capture the small-displacement high-frequency motion of the tie from
18 vibrations and impacts that are usually not captured by displacement based measurements, i.e.,
19 cameras and Bending Beam. Accelerations also provide insight to the loading environment
20 within the track system. Both the UIUC and Amtrak teams used piezo-electric accelerometers,
21 which are designed to capture high-magnitude (500g) and high-frequency (10,000 Hz)
22 accelerations that are often present in railroad track. For example, previous instrumentation of
23 the Upland Street northern Track #3 approach showed tie accelerations up to 30g from the
24 impact between an unsupported tie and the underlying ballast [7]. The UIUC team placed eight
25 (8) accelerometers at the eastern end of concrete ties at various distances from the bridge
26 abutment shown in Figure 1(a). The Amtrak team placed eight (8) accelerometers on a single tie
27 with two of them on the rail seats at a distance of 6.1 m (20 ft.) from the abutment to focus on the
28 vibrational characteristics of this tie. The Amtrak accelerometer closest to the tie edge was used
29 for comparison because it best represents the tie location that was used by the UIUC team. The
30 vibrational characteristics of the ties were not analyzed for this paper but will be discussed in
31 future papers to investigate the damping characteristics of UTPs.

32 **Filtering**

33 A signal processing technique used for the video camera, Bending Beam, and accelerometer
34 records is filtering. The purpose of filtering is to eliminate noise within the signal records or
35 isolate particular frequencies. Multiple types of mathematical filters exist and differ based on the
36 mathematical equation used to smooth the transition from the filtered and non-filtered range. The
37 Butterworth filter is selected for analyses because it is simple to use and sufficiently filters the
38 signal.

39 The frequency range to be filtered is generally specified by selecting one of three types of
40 filters: low-pass, high-pass, or band-pass. Low-pass filters allow frequencies lower than the
41 frequency cutoff and attenuate higher frequencies. High-pass filters allow frequencies higher
42 than the frequency cutoff and attenuate lower frequencies. Band-pass filters allow frequencies
43 between two frequency cutoffs and attenuate frequencies outside the cutoff range. An example of
44 a low-pass 8th-order Butterworth filter with a frequency cutoff of 500 Hz and its effect on the
45 frequency domain response is displayed in Figure 2. The frequency domain shows the tie

1 predominant frequency responses at 80 Hz, 390 Hz, 740 Hz, and 1,120 Hz. The 80 Hz frequency
 2 is attributed to impact between the tie and ballast while the remaining three are attributed to the
 3 vibration modes of the concrete tie. The filter largely eliminates the response above 500 Hz and
 4 in this case, eliminates the influence of higher order vibration modes.

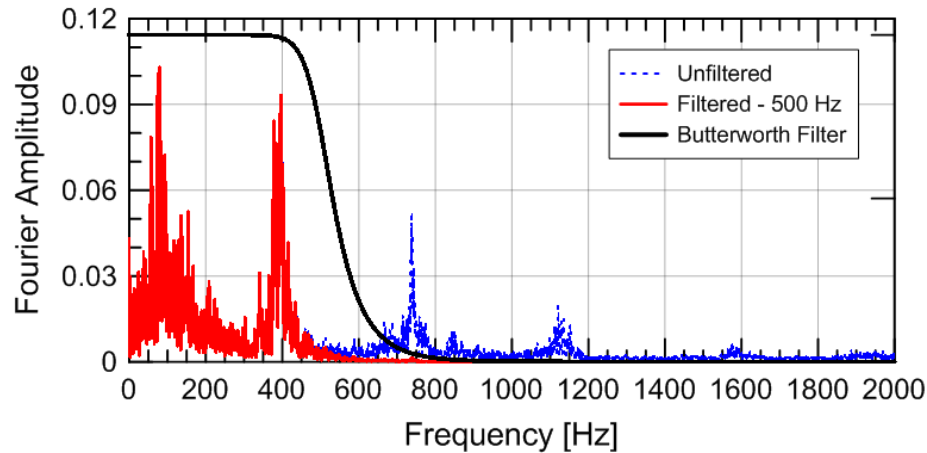

6
 7 **Figure 2: Effect of low-pass 8th-order Butterworth Filter with frequency cutoff of 500 Hz**
 8 **in frequency domain.**


10 FIELD MEASUREMENTS

11 The measurement results presented below are from a 177 km/hr (110 mph) Acela train traveling
 12 north along Track #2 entering the Upland Street Bridge at 12:39 PM on 12 August 2015. Slight
 13 variations were observed for different trains but the overall trends are similar so the results of
 14 only the 12:39 PM train are presented herein due to space constraints.

15 Displacement Results

16 To gain confidence in the instrumentation results, comparisons between the UIUC video cameras
 17 and accelerometers and the Amtrak accelerometers and Bending Beam were made for the same
 18 tie. The UIUC video camera and accelerometer results from Tie #4 (8 ft.) are compared in Figure
 19 3(a) and (b), respectively. The video camera was filtered using an 8th-order low-pass Butterworth
 20 filter with a frequency cutoff at 12 Hz. The thick black line represents the filtered response and
 21 the thin red line represents the unfiltered response. A low frequency cutoff was necessary to
 22 reduce the influence of the camera vibration and rotation not eliminated by the driven stake
 23 because the camera was placed on a steep slope close to Track #1. The accelerometers were
 24 filtered using a 3rd-order band-pass Butterworth filter with cutoffs at 2 Hz and 30 Hz. The high-
 25 pass cutoff (2 Hz) was necessary to eliminate drift from the double-integration process because
 26 of instrumentation noise and this filtering also affects the shape of the response but not the
 27 magnitude of the displacement. This means that the peak-to-peak displacement magnitudes will
 28 be valid but the shape of the response may not be properly reconstructed. The comparison of the
 29 video camera and accelerometer displacements show the magnitudes from the filtered video
 30 camera response (4.5 mm/0.18 in) are in agreement with the double-integration displacement
 31 (4.1 mm/0.16 in).


32

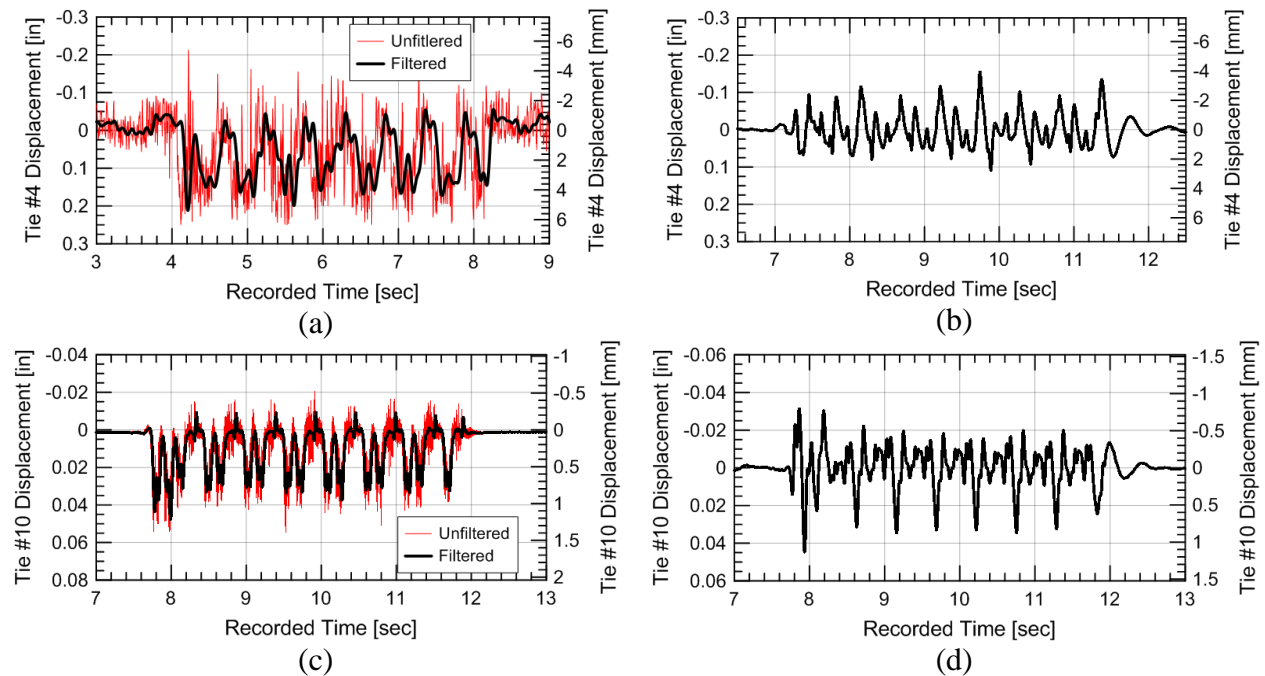

1 **Figure 3: Comparison of Tie #4 (8 ft.) response from UIUC: (a) video camera and (b)**
 2 **accelerometer and comparison with response of Tie #10 (20 ft.) from Amtrak: (c)**
 3 **Bending Beam and (d) accelerometer.**
 4
 5

6 The Bending Beam and accelerometer results at Tie #10 (6.1m/20 ft.) are compared in
 7 Figure 3(c) and (d), respectively. The Bending Beam was filtered using a 5th-order low-pass
 8 Butterworth filter with a cutoff at 30 Hz while the Amtrak accelerometer was filtered in the same
 9 manner as described earlier. The comparison shows a smaller displacement measured by the
 10 Bending Beam (0.85 mm/0.03 in) than the accelerometer (1.4 mm/0.06 in). A potential
 11 explanation for the difference is vertical displacement of the reference stake within the crib that
 12 is not accounted for with the Bending Beam measurements.

13 To analyze the frequencies of tie displacement, the Bending Beam response was
 14 converted to the frequency domain using Fast Fourier Transform (FFT) techniques and displayed
 15 in Figure 4(a). The results show tie displacement frequencies ranging from 2 Hz to 25 Hz. By
 16 plotting sine waves alongside the time domain response, the influence of the various frequencies
 17 is visualized in Figure 4(b). The results indicate that a frequency of 13.15 Hz represents the
 18 loading of a single wheel and 5.65 Hz illustrates the unloading of the train truck. The other
 19 frequencies also represent physical motion but are not easily visualized; however, most
 20 displacement magnitude information appears to be in the 6.65 and 13.15 Hz frequencies. This
 21 indicates that 13 Hz is the dominant frequency of train loading at Tie #10 (20 ft.) and all
 22 instruments are able to capture this frequency as expected. The 12 Hz cutoff of the video camera
 23 captures the peak displacement of each train truck, which is the desired value, but does not
 24 capture the entire shape from each passing wheel because of the presence of camera vibrations of
 25 about 15 Hz.
 26
 27

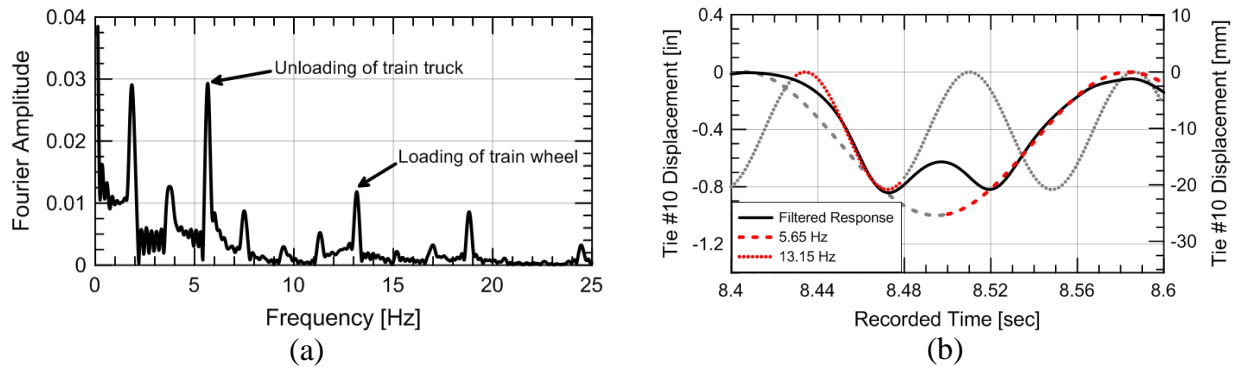


1 **Figure 4: Bending Beam response in: (a) frequency domain and (b) time domain with sine**
 2 **waves at different frequencies.**
 3

4 Accelerometer Results

5 The accelerometer results at Tie #1 (2 ft.) are shown in Figure 5 at various filtering frequency
 6 cutoffs to emphasize the impact of filtering and how to determine the frequency of various
 7 acceleration mechanisms in time histories. Figure 5 shows the unfiltered acceleration time
 8 history along with the 8th order low-pass Butterworth filter response with frequency cutoffs at
 9 1000, 500, 200, 60, and 30 Hz. This is supplemented with the unfiltered response in the
 10 frequency domain (Figure 5(g)). These results indicate the majority of tie acceleration occurs
 11 within the 60 to 500 Hz range with the average peak acceleration dropping from 30g (Figure
 12 5(c)) to 5g (Figure 5(e)) when this frequency range is attenuated. This agrees with the frequency
 13 domain response in Figure 5(g) that shows the majority of the frequency response occurring
 14 within the 60 to 500 Hz range for Tie #1 (2 ft.). This response is attributed to tie loading and
 15 appears in the acceleration time history as continual 10 to 20g responses during each wheel pass.

16 The noticeable frequency responses at 390, 740, and 1,120 Hz are likely due to vibration
 17 of the concrete ties with the UTPs attached because the responses are present for all ties
 18 measured with UTPs. These responses are not present for the ties that do not have UTPs. For
 19 example, Ties #31 (62 ft.) and #40 (82 ft.), which do not have UTPs, do not show significant
 20 frequency response greater than about 300 Hz. The large response at 80 Hz is attributed to the
 21 impact of the tie contacting/impacting the ballast. This can be observed in Figure 5(d) with a
 22 frequency cutoff of 200 Hz time history, where a single downward peak of about -30g occurs
 23 during every wheel passage. This behavior is similar to previous Upland Street northern Track
 24 #3 measurements, in which the peak acceleration correlated exactly with the time that the tie
 25 contacted/impacted the ballast [7]. No other tie except Tie #1 (2 ft.) displays a significant
 26 response at 80 Hz, which suggests that Tie #1 (2 ft.) in the southern Track #2 approach is
 27 unsupported. This agrees with visual observations of significant tie movement during train
 28 passage and large displacements (8.0 mm) from double-integration of Tie #1 accelerations. As a
 29 result, Tie #1 is likely experiencing impact during contact with the ballast and additional
 30 vibration from the lack of ballast damping even though an UTP is present. The response in
 31 Figure 5(f) with a frequency cutoff of 30 Hz isolates the accelerations from tie displacement (~2
 32 to 25 Hz) because this response can be double-integrated to estimate peak displacements.

33
 34

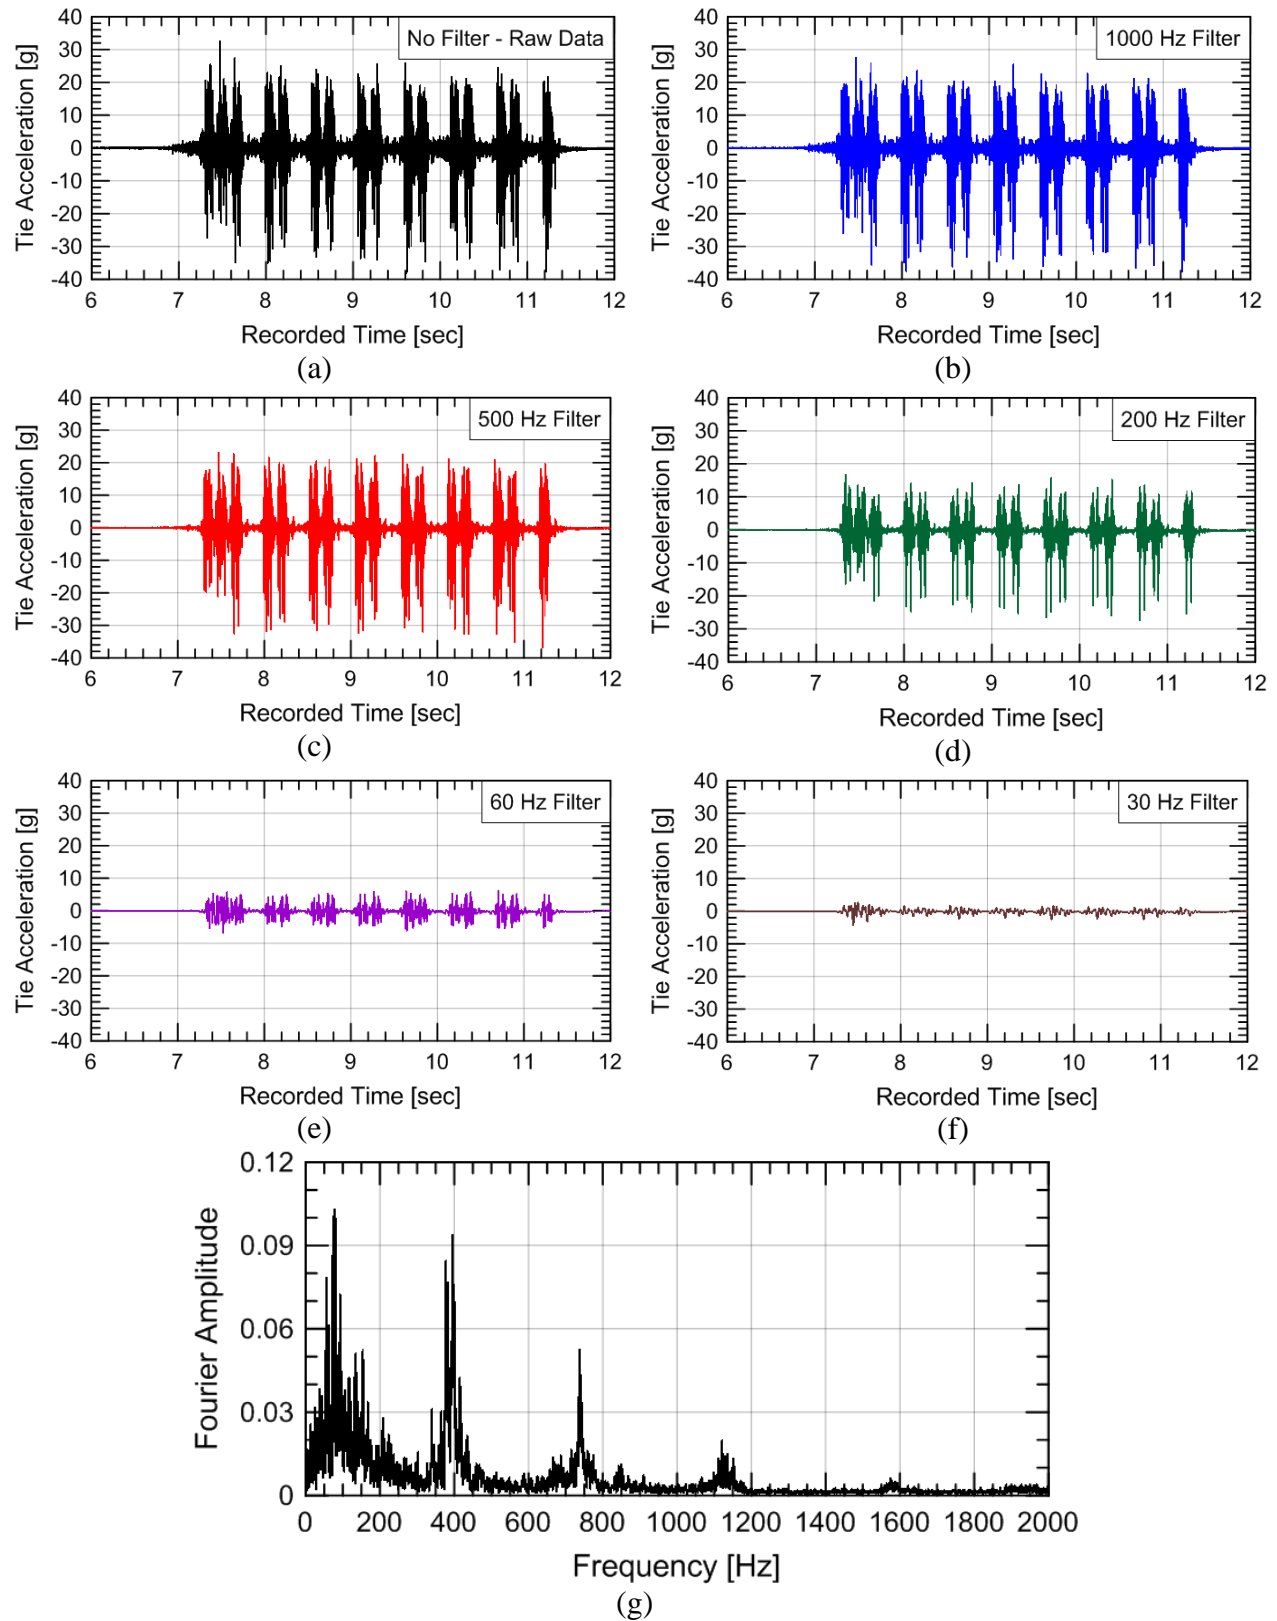


1 **Figure 5: Accelerometer response at Tie #1 (2 ft.) with: (a) no cutoff and frequency cutoffs**
 2 **of: (b) 1,000 Hz, (c) 500 Hz, (d) 200 Hz, (e) 60 Hz, (f) 30 Hz, and (g)**
 3 **corresponding frequency response.**

1 Response with Distance



2 The peak displacement and acceleration values are plotted with distance from the abutment to
 3 evaluate changes in behavior along the transition zone for ties with and without UTPs. Figure
 4 6(a) compares the displacements from all available instruments and the displacement magnitudes
 5 show general agreement except for the lowest magnitude being from the Bending Beam
 6 displacement, which is probably due to vertical displacement of the reference crib ballast (see
 7 Figure 2(c)). In general, the results suggest large transient displacements near the bridge
 8 approach that decrease to a local minimum at about Tie #10 (20 ft.) and then slightly increase
 9 until the open track is reached.

10 Figure 6(b) shows the average peak accelerations at various frequency cutoffs. The
 11 general response agrees with the tie displacements, in which large accelerations are observed
 12 near the bridge abutment and the accelerations decrease until about Tie #10 (6.1 m) and then
 13 they increase again until the open track is reached. This increase in displacements with distance
 14 could be attributed to the “landing zone” for trains that ran southbound on Track #2 instead of
 15 the predominant direction of northbound. No significant difference is observed at the transition
 16 between ties with UTPs (Ties #1 through #29) and ties without UTPs (Tie #30+) but this is
 17 anticipated because all of the instrumented ties in the open track are well supported so the
 18 benefits of UTPs are not being manifested.

19 The displacement and acceleration results suggest that the first six to seven ties are
 20 unsupported with differing tie-ballast gaps as shown in Figure 6(c). This is in agreement with the
 21 impact observed at Tie #1 (2 ft.) in the tie acceleration response that was not observed at any
 22 other tie. The unsupported ties were also observed visually during train passage.
 23

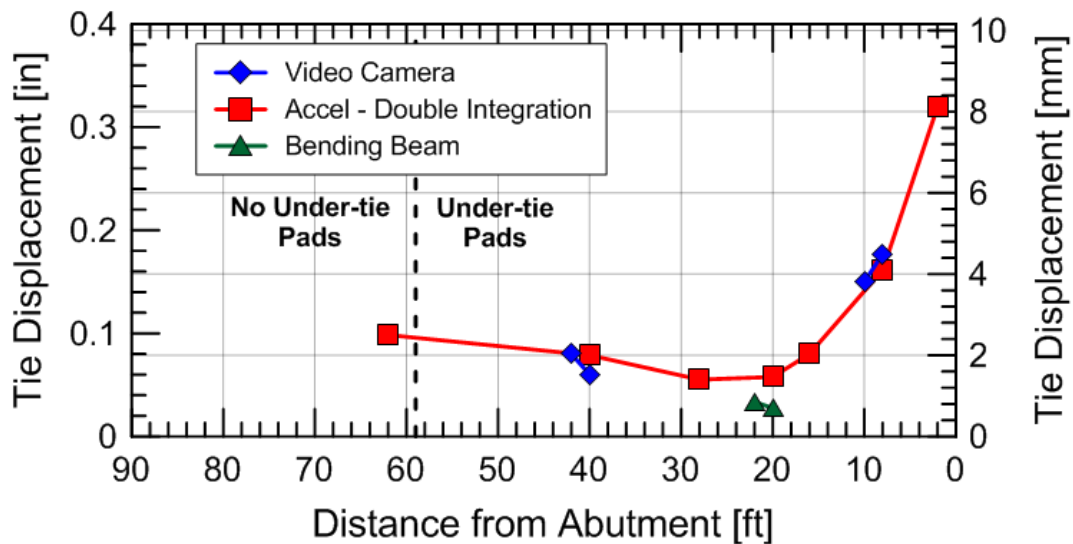

(a)

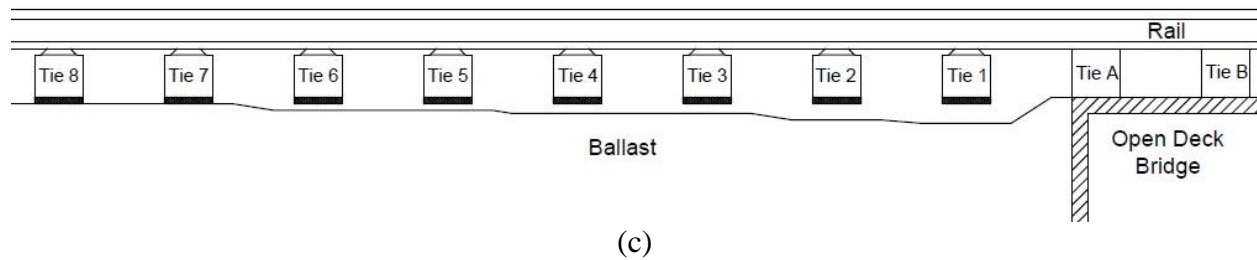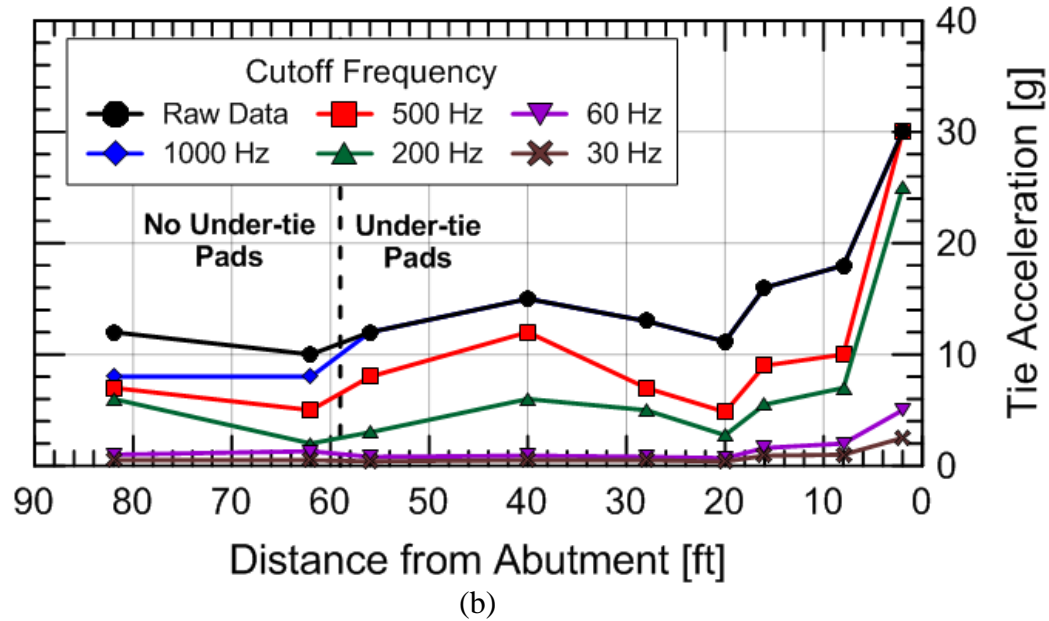

1 **Figure 6: Diagrams of: (a) peak displacement and (b) peak acceleration with distance from**
 2 **the abutment and (c) schematic of track support along the transition zone, which**
 3 **shows Ties #1 through #6 unsupported.**
 4

5 Track geometry measurements recorded monthly for this approach suggest little change
 6 in track geometry has occurred between the installation of the UTPs and the day of testing on 12
 7 August 2015, i.e., after 346 days. It is not clear whether the six to seven unsupported ties near the
 8 abutment have existed since UTP installation, i.e., due to inadequate ballast compaction near the
 9 bridge abutment, or whether ballast settlement has slowly been accumulating over the 346 days
 10 due to increased vehicle loading at the abutment, poor drainage, ballast degradation, and/or tie
 11 damage. Regardless, no track geometry problems have developed at the southern Track #2
 12 transition since UTP installation about one year earlier as opposed to 14 mm/yr of settlement
 13 measured at the northern Track #3 transition prior to remediation. Unfortunately, direct
 14 comparisons with previous analyses at surrounding sites cannot be made due to the use of
 15 different instrumentation.

16 If track geometry continues to hold, UTPs may show to be an effective remedial measure
 17 for reducing differential movement at railroad transition zones. It is hoped future monitoring will
 18 confirm this initial observation.
 19

1 SUMMARY

2 Under-tie pads (UTPs) were installed under the twenty-nine (29) ties immediately before an
3 existing high-speed passenger bridge to evaluate their effectiveness in reducing dynamic
4 response of the track and differential movement between the bridge, approach, and open track.
5 Track structure measurements about one year after UTP installation show unsupported ties near
6 the bridge abutment but track geometry measurements so far do not show a deterioration of track
7 geometry. This suggests that the unsupported ties near the abutment are likely caused by
8 ballast/subgrade settlement immediately after placement and significant ballast degradation has
9 not occurred since UTP installation as it has in an adjacent approach because the geometry does
10 not appear to be changing with time. If this holds, this suggests the anticipated benefits of
11 reduced loads, vibrations, impacts, and ballast degradation can reduce track geometry
12 deterioration over time. In other words, while UTPs will not result in smaller tie accelerations
13 everything else being equal, but they can prevent conditions that cause higher tie accelerations,
14 tie loads, and track degradation to develop.

16 ACKNOWLEDGMENTS

17 The authors acknowledge the funding provided by a Federal Railroad Administration (FRA)
18 Research Grant for the project titled: “Seismic Testing for Track Substructure (Ballast and
19 Subgrade) Assessment” under the direction of Hugh B. Thompson II and Theodore R. Sussmann,
20 Jr. The authors also acknowledge the FRA Broad Agency Announcement funding for the
21 “Differential Movement at Railway Transitions” research project and the project supervision and
22 direction provided by Cameron Stuart. The authors also gratefully acknowledge Michael Craft,
23 Mike Tomas, Marty Perkins, Carl Walker and Matt Greve of Amtrak for their assistance and
24 measurements during the site visit. The assistance of Dillion Bentros, Doug Presson, and Luke
25 Reardon of Pandrol USA and Dan O’Donnell, Enok Cheon, and Jiarui Chen from the UIUC is
26 also appreciated.

29 REFERENCES

- 30 1. Stark, T.D. and S.T. Wilk. Root cause of differential movement at bridge transition zones.
31 *Proc. IMechE. Part F: J. Rail Rapid Transp.* 2016. Vol 230(4), pp. 1257-1256.
- 32 2. Kerr, A.D., and Bathurst, L.A. A Method for Upgrading the Performance at Track
33 Transitions for High-Speed Service. *DOT/FRA/ORD-02-05*, September 2001.
- 34 3. Plotkin, D. and D. Davis. Bridge Approaches and Track Stiffness. *DOT/FRA/ORD-08-01*,
35 February 2008.
- 36 4. Mishra, D., E. Tutumluer, T.D. Stark, J.P. Hyslip, S.M. Chisner, and M. Tomas.
37 Investigation of Differential Movement at Railroad Bridge Approaches through
38 Geotechnical Instrumentation. *Journal of Zhejiang University-Science A*, 2012.
39 13(11):814-824
40

- 1 5. Stark T.D., S.T. Wilk, H.B. Thompson II, and T.R. Sussmann, Effect of Unsupported Ties
2 at Transition Zones. *Proceedings of Railway Engineering-2015 Conference*, June 30th –
3 July 1st. Edinburgh, Scotland.
- 4 6. Stark T.D., S.T. Wilk, and T.R. Sussmann. Evaluation of Tie Support at Transition Zones.
5 *Transportation Research Record: Journal of the Transportation Research Board*, No.15-
6 2902, Transportation Research Board of the National Academies, Washington, D.C. 2015.
- 7 7. Wilk, S.T., T.D. Stark, and J.G. Rose. Evaluating tie support at railway bridge transitions.
8 *Proc. IMechE. Part F: J. Rail Rapid Transp.* 2016. Vol 230(4), pp. 1336-1350.
- 9 8. Selig, E.T., and J.M Waters. *Track Geotechnology and Substructure Management*. London:
10 Thomas Telford; 1994.
- 11 9. Douglas, S.C. Ballast Quality and Breakdown during Tamping. *Proceedings of 2013*
12 *American Railway Engineering and Maintenance-of-Way Association Conference*.
13 Indianapolis, IN.
- 14 10. Han, X. and E.T. Selig ET. Effects of Fouling on Ballast Settlement. *In Proceedings of 6th*
15 *International Heavy Haul Railway Conference*. Cape Town, South Africa, April 6-10,
16 1997.
- 17 11. Stark T.D., S.T. Wilk, and J.G. Rose. Design and Performance of Well-Performing
18 Railway Transitions. *Transportation Research Record: Journal of the Transportation*
19 *Research Board*, No.16-5926, Transportation Research Board of the National Academies,
20 Washington, D.C. 2015.
- 21 12. Li, D, and L. Maal. Heavy Axle Load Revenue Service Bridge Approach Problems and
22 Remedies. *Proceedings of the 2015 Joint Rail Conference*. March 23-26, 2015, San Jose,
23 California.
- 24 13. Paixão, A., E. Fortunato, and R. Calçada. Design and construction of backfills for railway
25 track transition zones. *Proceedings of the Institution of Mechanical Engineers, Part F:*
26 *Journal of Rail and Rapid Transit*. 2015. Vol 229(1), pp. 58-70
- 27 14. Indraratna, B., W. Salim, and C. Rujikiatkamjorn. *Advanced Rail Geotechnology – Ballast*
28 *Track*. CRC Press/Balkema, Leiden, The Netherlands. 2012.
- 29 15. Coehlo, B., P. Hölscher, J. Priest, W. Powrie, and F. Barends. An assessment of transition
30 zone performance. *Proceedings of the Institution of Mechanical Engineers, Part F: Journal*
31 *of Rail and Rapid Transit*. 2011. Vol 225, pp. 129-139
- 32 16. Indraratna, B., P.K. Thakur, and J.S. Vinod. Experimental and Numerical Study of Railway
33 Ballast Behavior under Cyclic Loading. *International Journal of Geomechanics*. Vol 10, No
34 4, pp 136-144. 2010.
- 35 17. Mesri, G., and B. Vardhanabhuti. Compression of granular material. *Canadian Geotech J.*,
36 Vol 46: 369-392. 2009.
- 37 18. Selig, E.T., V. DelloRusso, K.J. Laine. Sources and Causes of Ballast Fouling. *Report No.*
38 *R-805, Association of American Railroads*, Technical Center, Chicago. 1992.
- 39 19. McHenry, M.T., M. Brown, J.L. LoPresti, J. Rose, R. Souleyrette. The Use of Matrix
40 Based Tactile Surface Sensors to Assess the Fine Scale Ballast-Tie Interface Pressure

- 1 Distribution in Railroad Track. *Proceedings of Transportation Research Board 94th Annual*
2 *Conference*, Washington D.C., January 2015.
- 3 20. Indraratna, B., P.K. Thakur, and J.S. Vinod. Experimental and Numerical Study of Railway
4 Ballast Behavior under Cyclic Loading. *International Journal of Geomechanics*. Vol 10,
5 No 4, pp 136-144. 2010.
- 6 21. Schnedier, P., R. Bolmsvik, and J.C.O. Nielsen. In situ performance of a ballasted railway
7 track with under sleeper pads. *Proceedings of the Institution of Mechanical Engineers, Part*
8 *F: Journal of Rail and Rapid Transit*. 2011. Vol. 225, pp. 299 – 309
- 9 22. Wilk S.T., T.D. Stark, and J.G. Rose. Non-Invasive Techniques for Measuring Vertical
10 Transient Track Displacements. *Proceedings of Transportation Research Board 95th*
11 *Annual Conference*, Washington D.C., January 2016.
- 12 23. Abutuslimited. *Dynamic Voidmeter*. 2008. [http://www.abtus.com/en/products/rail/track-](http://www.abtus.com/en/products/rail/track-geometry/ABT3137)
13 [geometry/ABT3137](http://www.abtus.com/en/products/rail/track-geometry/ABT3137). Accessed July 2016.
- 14 24. Lamas-Lopez, F. V. Alves-Fernandes, Y.J. Cui, , S.C. D’Aguiar, N. Calon, J. Canou, J.
15 Dupla, A.M. Tang, and A. Robinet. Assessment of the Double Integration Method using
16 Accelerometers Data for Conventional Railway Platforms. *Proc: 9th International*
17 *Conference on Engineering Computational Technology*. Stirlingshire, Scotland. Pp. 1 – 18.