



THIRD DRAFT

Development and Use of Fully Softened Shear Strength in Slope Stability Analyses

Prepared By:

**Fully Softened Shear Strength Subcommittee of the
Embankment, Dams, and Slopes Technical Committee
ASCE Geo-Institute**

EDS Subcommittee Chair:

Timothy D. Stark, Ph.D., P.E., D.GE
Professor of Civil and Environmental Engineering
University of Illinois at Urbana-Champaign
205 N. Mathews Ave.
Urbana, IL 61801
tstark@illinois.edu

A White Paper submitted for review and possible acceptance by the **Embankment, Dams, and Slopes (EDS) Technical Committee**

February 12, 2016

WHITE PAPER #1

DEVELOPMENT AND USE OF FULLY SOFTENED SHEAR STRENGTH IN SLOPE STABILITY ANALYSES

By: Timothy D. Stark, Scott Anderson, Thomas L. Brandon, Kristi Bumpas, Bernardo Castellanos, Garry Gregory, Navid Jafari, Erik Loehr, Michael McGuire, Chris Meehan, Daniel Pradel, Binod Tiwari, Daniel VandenBerge, Stephen G. Wright, and Adda Athanasopoulos-Zekkos

Preface and Acknowledgments

This document is the product of many practitioners' and academicians' contributions over a period of more than twelve months. The first edition evolved from contributions from various members of the Fully Softened Shear Strength (FSS) Subcommittee of the Embankment, Dams, and Slopes (EDS) Technical Committee of the Geo-Institute. The Chair of the FSS Subcommittee is Timothy D. Stark with significant contributions from every member of the FSS Subcommittee. After review and approval by the FSS Subcommittee, the entire EDS Committee reviewed and approved this white paper.

The following individuals (in alphabetic order) comprised the FSS Subcommittee of the EDS Committee and contributed significantly to this white paper:

Scott A. Anderson

FHWA

Kristi K. Bumpas

Red Rock Consulting

Garry H. Gregory

Gregory Geotechnical, Inc.

J. Erik Loehr

University of Missouri at Columbia

Thomas L. Brandon

Virginia Tech

Bernardo Catellanos

CH2M-Hill, Inc.

Navid Jafari

Louisiana State University

Michael McGuire

Lafayette College

40 Christopher L. Meehan
41 University of Delaware

42

43 Vernon R. Schaefer
44 Iowa State University

45

46

47 Binod Tiwari
48 California State University at Fullerton

49

50 Stephen G. Wright
51 University of Texas at Austin

52

53

54

55

56

Daniel Pradel
Shannon and Wilson, Inc.

Timothy D. Stark
University of Illinois at Urbana-
Champaign

Daniel R. VandenBerge
Tennessee Tech

Adda Athanasopoulos-Zekkos
University of Michigan

DRAFT

57 **Table of Contents**

58		<u>Page</u>
59	Table of Contents	4
60	1. Introduction.....	6
61	2. Purpose and Use.....	7
62	3. FSS Definition (What is it?)	8
63	(a) Drained v. Undrained Strengths	8
64	(b) Drained Strengths: Peak, FSS, and Residual Strengths.....	9
65	4. Shear Strength Selection Consequences (Why do I care?).....	14
66	(a) Undisturbed Soil Peak strength v. FSS Case History.....	14
67	(b) Compacted Peak strength v. FSS Case History.....	15
68	(c) Desiccated Peak strength v. FSS Case History	16
69	(d) FSS v. Residual Strength Case History	18
70	(e) Importance of Difference between FSS and Residual Strengths	19
71	5. Development of FSS (Where does it develop?).....	21
72	(a) Cut or Excavated Slopes (Stark).....	21
73	(b) Compacted Fill Slopes (Stark).....	26
74	(b) Effect of Clay Mineralogy on FSS.....	31
75	(c) Effect of Pore-Water Chemistry on FSS	33
76	6. FSS Measurement and Representation (How do I measure it?) (Stark)	35
77	(a) Shear Devices.....	35
78	(b) Shear Displacement Rate/Test Procedure.....	39
79	(c) Specimen Disaggregation and Preparation.....	39
80	(d) Specimen Water Content and Hydration.....	43
81	(e) FSS at low effective stresses.....	43
82	(f) Representation of effective normal stress-dependent FSS envelope	45
83	(g) Summary	47
84	6. FSS Empirical Correlations (Is there an easier way?)	49
85	(a) Relevant correlation parameters	49
86	(b) Existing correlations	49
87	(c) Anchoring correlations	52
88	7. FSS in Stability Analyses (How do I apply it?).....	53
89	(a) Critical Slip Surface and Applicable Factors of Safety	53
90	(b) Representative pore-water pressures	54
91	(c) Limit Equilibrium Stability Methods.....	55

92	(d) Time rate of softening in reliability slope stability analyses.....	55
93	8. FSS Mitigation Measures (How do I limit FSS development?).....	58
94	9. Summary and Recommendations (TO BE COMPLETED).....	59
95	10. Cited References.....	60
96	11. Additional/Uncited References.....	69
97	(a) Measurement.....	69
98	(b) FSS in overconsolidated clays.....	69
99	(c) FSS in compacted clays.....	69
100	(d) Drained strength v. undrained strength.....	69
101	(e) FSS at low effective normal stresses.....	69
102	(f) Empirical correlations for slope stability analyses.....	69
103	(g) Other possible topics.....	69
104		
105		
106		
107		
108		
109		

DRAFT

THIRD DRAFT

DEVELOPMENT AND USE OF FULLY SOFTENED SHEAR STRENGTH IN SLOPE STABILITY ANALYSES

1. Introduction

Stability analyses for cut, embankment, dam, and levee slopes comprised of fine grained soils have traditionally been conducted using peak strengths or some percentage of peak strength determined from standard laboratory shear strength tests on undisturbed or freshly compacted samples. Using these peak strengths and slope ratios in the range of 3H:1V (3 horizontal to 1 vertical) to 4H:1V with vertical heights of 15 to 25 feet (4.6 to 7.6 m) typically results in calculated factors of safety that are above the regulatory required value of 1.5 and in many cases above 2.0, even with the assumption of a piezometric level or pore-water pressure ratio in the slope. However, many of these slopes have subsequently failed, which implies a factor of safety of approximately unity (one). This disparity indicates the peak strength from standard laboratory shear strength tests are not representative of the long-term soil strength in cut or embankment slopes.

It has long been recognized that stiff fissured clays may become “fully softened” and undergo significant strength loss over time (Skempton, 1964 and 1970). However, the use of the fully softened strength (FSS) in fine grained slopes has only come into use for compacted soil slopes in recent years (Stark and Duncan, 1991; Stark and Eid, 1997; Duncan et al., 2011). In addition, there are situations where there is no recent history of slope movement where a FSS would be expected to be mobilized but instead a residual strength was mobilized (Stark and Eid, 1997; Mesri and Shahein, 2003). This can be problematic because the FSS is significantly greater than the residual for high plasticity materials, i.e., liquid limit greater than 50. As a result, this White Paper explains how to: identify FSS susceptible slopes, measure FSS, and use FSS in stability analyses.

141

142 **2. Purpose and Use**

143 The purpose of this white paper is to explain:

144

- 145 • fully softened strength (FSS),
- 146 • why geotechnical engineers should understand FSS,
- 147 • how FSS develops with time,
- 148 • slopes susceptible to developing a FSS condition,
- 149 • how to measure FSS, use of FSS in stability analyses, and
- 150 • measures that can be implemented to limit FSS development.

151

152 The importance of the FSS is being recognized by academia and practice and is being
153 adopted by state and federal agencies. For example, the U.S. Army Corps of Engineers
154 Engineering Manual EM 1110-2-1902 SLOPE STABILITY (2003) recommends the FSS
155 be the design shear strength for high plasticity, high clay-size fraction clays, and clay-rich
156 soft rocks (shales and clay shales) in all long-term stability analyses.

157

158 It is envisioned that this White Paper will be used by practitioners and academicians to
159 understand and utilize the FSS in their activities. The White Paper also provides references
160 for future study of the various topics covered herein. In particular, this White Paper
161 provides a summary of and references for the various shear strengths that may be
162 applicable to a slope stability analysis, consequences of selecting an inappropriate
163 shear strength for slope design, slope conditions where a fully softened strength (FSS)
164 is likely to develop, techniques for measuring and incorporating the FSS in stability
165 analyses, applicable factors of safety, and techniques for limiting development of a FSS
166 condition for an embankment slope.

167

168

169

170 **3. FSS Definition (What is it?)**

171 This section discusses the various strengths that may be mobilized in soil deposits
172 and when they may be applicable to slope stability analyses. This section starts with
173 determining whether a soil will be drained or undrained and then discusses drained
174 peak, fully softened, and residual strengths and their applicability to drained slope
175 stability analyses.

176
177 (a) Drained v. Undrained Strengths

178 In drained and partially drained loading excess pore-water pressures can dissipate while
179 the soil expands or contracts. During undrained loading pore-water pressures change,
180 which results in a variation of effective stresses, while the total volume remains constant.
181 Generally the following drainage conditions are considered in geotechnical engineering:

182
183 Drained Strength: Drained loading implies that loads are applied at a sufficiently
184 slow rate so that no significant pore-water pressures are generated in the soil during
185 shear and the associated volume change. A drained condition usually develops if
186 the Time Factor (T) is greater than 3 (Wright and Duncan, 2005) where T is defined
187 as:

188
189
$$T = \frac{C_v * t}{(H_{dr})^2} \quad (1)$$

190
191 where C_v is the coefficient of consolidation, t is time, and H_{dr} is the length of
192 drainage path to dissipate shear-induced pore-water pressures.

193
194 Undrained Strength: Undrained loading refers to a loading condition where pore-
195 water pressures are generated in saturated and contractive soils while pore-water
196 pressures decrease in saturated, dilatant soils. Undrained loading is a shear
197 condition in which no volume change occurs. An undrained condition usually
198 develops if T is less than 0.01 (Wright and Duncan, 2005).

199
200 Partially Drained Strength: Partially drained implies a loading situation somewhere
201 in between the drained and undrained loadings described above. It involves a
202 condition in which some of the pore-water pressures generated during loading have

203 dissipated but are still significant. Additionally, some related volumetric change
204 has occurred in the form of contraction or dilation.

205

206 The strength of soil sheared under drained conditions is usually illustrated with
207 effective stress strength parameters, using the linear Mohr-Coulomb failure criterion
208 as shown below:

209

$$210 \quad \tau_f = c' + \sigma'_{ff} * \tan \phi' \quad (2)$$

211

212 where τ_f is the shear stress at failure, i.e., shear strength, c' and ϕ' are the effective
213 stress cohesion intercept and friction angle, respectively, of a linear strength
214 envelope, and σ'_{ff} is the effective normal stress on the failure plane at failure.
215 However, it is now accepted the drained FSS and residual strengths are effective
216 normal stress dependent (Stark and Eid, 1997) and should not be modeled using a
217 linear strength envelope in stability analyses, which is discussed further below.

218

219 The focus of this White Paper is drained shear strength for stability analyses so
220 undrained strength parameters and the possible effect of softening on undrained
221 strengths will be addressed in a subsequent White Paper.

222

223 (b) Drained Strengths: Peak, FSS, and Residual Strengths

224

225 This section discusses the different drained shear strengths that may be applicable to slope
226 stability analyses of cut slopes and embankments containing fine grained soils. In
227 particular, this section discusses the difference between the drained peak, fully softened,
228 and residual strengths and their applicability to various field conditions and slope stability
229 analyses.

230


231 Skempton (1985) defines various strengths along a degrading shear stress or shear stress
232 ratio (τ /effective normal stress, (σ'_n)) versus shear displacement relationship (see **Figure**
233 **1**) using the following terminology:

234

235 • The peak or maximum shear strength achieved for each specimen after the initial
 236 nearly elastic behavior is referred to as the "peak strength." Unfortunately there is
 237 a range of peak shear strength depending on the level of weathering and/or fissuring
 238 the deposit has undergone, which has resulted in some confusion. If little or no
 239 weathering has occurred or the sample was obtained from a depth that precludes
 240 significant weathering, the resulting strength is referred to as Peak Intact Strength.
 241 If significant weathering and/or stress relief has occurred, the soil is usually
 242 weathered, fissured, and/or jointed, and the resulting strength is referred to as Peak
 243 Weathered- or Fissured-Strength. The Peak Intact Strength Envelope is always
 244 higher than the Peak Weathered Strength Envelope, so the level of weathering
 245 should be carefully considered before assigning a Peak Intact Strength Envelope in
 246 a stability analysis.

247

248

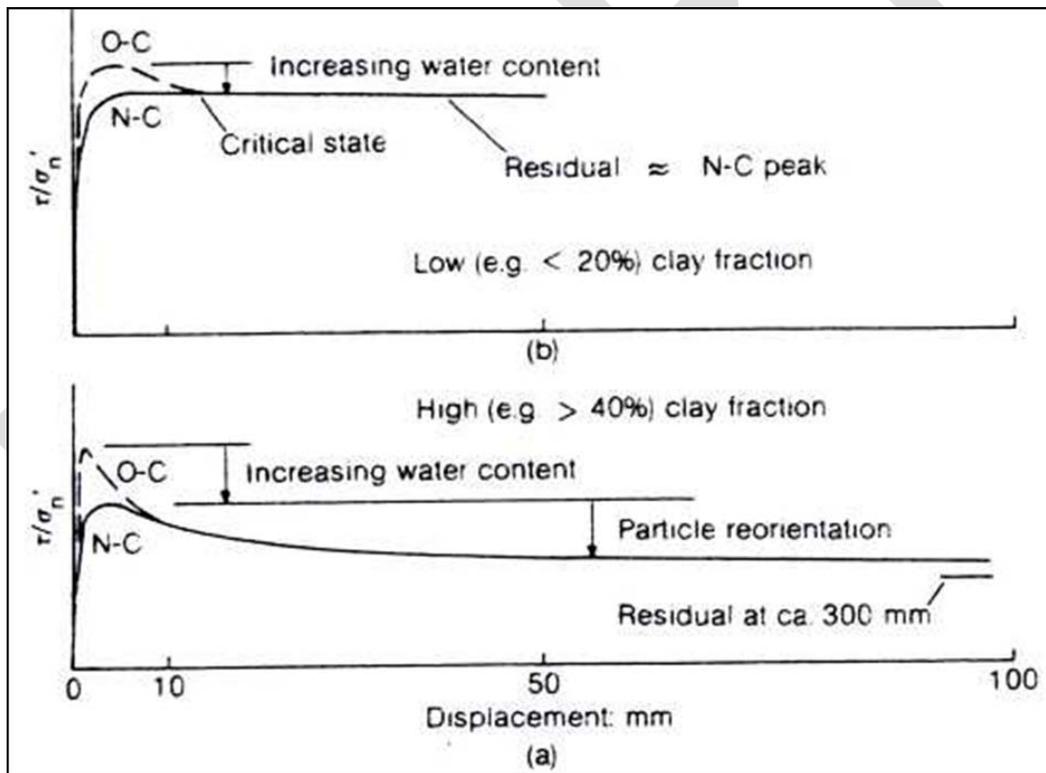

249

250 **Figure 1.** Drained shear behavior for: (a) low and (b) high clay fraction ($\% < 2 \mu\text{m}$) soils
 251 (after Skempton, 1985).
 252
 253
 254
 255

256

257 • **Figure 1** also shows the shear strength or shear stress ratio decreases after the peak
258 strength is mobilized with additional shear deformation. This post-peak strength
259 loss is marked by an inflection in the shear stress-displacement relationship that
260 eventually reaches the "critical state" (Skempton 1985) as shown in **Figure 1**. The
261 critical state is achieved by an increase in moisture content, i.e., dilation, and to a
262 lesser extent by particle re-orientation in clayey soil, i.e., high clay-size fraction
263 ($\% < 2\mu\text{m}$) soil. This critical state is the FSS as proposed by Skempton (1970 and
264 1985). The critical strength was developed to explain the strength mobilized in
265 slopes that had not experienced prior sliding but undergone years of softening and
266 other factors. In other words, the FSS corresponds to the average strength mobilized
267 along the observed failure surface in case histories that Skempton (1970 and 1985)
268 investigated while developing recommendations for shear strengths that should be
269 used in stability analyses of slope that had not undergone prior landsliding. These
270 slopes are referred to as first-time slides by Skempton (1970 and 1985). Skempton
271 (1970) then developed a procedure for estimating the FSS for design of first time
272 slide slopes by equating the average strength mobilized along the observed failure
273 surface in a case history to the critical state strength, which could be estimated by
274 measuring the peak strength of a normally consolidated specimen as discussed
275 below.

276 Skempton (1970) equated the critical state to the shear strength mobilized along a
277 failure surface after the effects of overconsolidation, particle bonding, and/or
278 interlocking have been removed or lost but the particles are still primarily in an
279 edge-to-face arrangement instead of being primarily oriented parallel to the
280 direction of shear as in a residual strength condition. Therefore, the critical state
281 corresponds to the peak strength of a normally consolidated specimen, which does
282 not exhibit a significant decrease in strength or stress ratio with increasing
283 displacement (see **Figure 1(a)**). Similarly, **Figure 1(b)** shows the critical strength
284 corresponds to the peak strength of a normally consolidated specimen, which does
285 exhibit a significant decrease in strength with increasing displacement because the
286 clay-size fraction (CF) is greater than 40%. This provides some initial insight to
287 the importance of clay-size fraction and plasticity on the magnitude of the FSS
288 discussed below.

289

290 • After a large amount of shear displacement, the shear strength reduces to a nearly
291 constant value that is called the "residual strength." The "residual strength" is
292 reached through re-orientation of some to most of the particles parallel to the

293 direction of shear. The level of reorientation depends on the CF and plasticity of
294 the soil (Stark and Eid, 1994). For CFs less than 20% (see **Figure 1(a)**), the
295 particles are primarily granular, so rolling shear behavior occurs and there is limited
296 reorientation of the clay particles parallel to the direction of shear. Conversely for
297 CFs greater than 40% (**Figure 1(b)**), the particles are mainly platy and significant
298 reorientation parallel to the direction of shear can occur causing a significant
299 decrease in strength from the critical state, i.e., FSS, to the residual strength. As
300 shown below in empirical correlations, higher CF soils exhibit lower FSS and
301 residual strengths therefore correlations should include CF and thus shear behavior,
302 e.g., rolling, transitional, and sliding, in their strength estimates. For example,
303 Lupini et al. (1981) present the following three shear behavior groupings: less than
304 or equal to 25%, between 25 and 50%, and greater than or equal to 50%, for rolling,
305 transitional, and sliding shear behavior, respectively.

306


307 An example of this shear behavior and the resulting strength envelopes is shown in **Figure**
308 **2**, which shows the range of strengths for Upper Cretaceous Pierre Shale from near Rapid
309 City, South Dakota (Contreras, 2003). Consolidated-drained triaxial compression tests
310 were performed to measure the peak strength of intact and weathered Pierre Shale.
311 Torsional ring shear tests were used to measure the FSS and residual strength of
312 reconstituted material from the weathered Pierre Shale. **Figure 2** shows the range of
313 strength envelopes and all of the strength envelopes are effective stress dependent. For
314 illustration purposes, the four effective normal stress dependent strength envelopes are
315 summarized below:

- 316 • Peak Intact Strength Envelope: secant friction angle of 45 degrees at low effective
317 normal stress (σ'_n) of 28 kPa and about 29 degrees at high σ'_n of 287 kPa,
- 318 • Peak Weathered Strength Envelope: secant friction angle of only about 24 degrees,
- 319 • FSS: secant friction angle of 22 degrees at σ'_n of 50 kPa to about 16 degrees at σ'_n
320 of 400 kPa, and
- 321 • Residual: secant friction angle of 11 degrees at σ'_n of 50 kPa and about 7.5 degrees
322 at σ'_n of 700 kPa.

323

324 This large range of shear strength will result in a large range in calculated factor of safety
325 so selecting the strength envelope that models field conditions is vital to correctly
326 predicting slope behavior and stability.

327

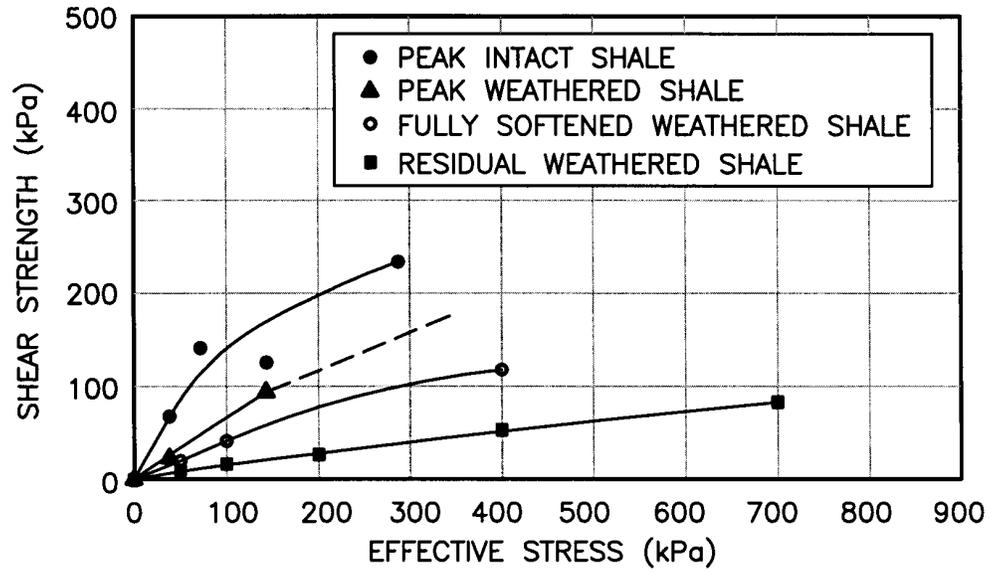

328

329

Figure 2. Drained strength envelopes for Pierre Shale from Contreras (2003).

330

331

332

333

334

335

DRAFT

336

337 **4. Shear Strength Selection Consequences (Why do I care?)**

338 This section uses three case histories to illustrate the adverse consequences that strength
339 loss from the peak strength to the FSS can have on slope stability and why understanding
340 this strength loss is so important for slope stability analyses. Duncan (2013) states the three
341 most important factor in slope stability are: shear strength, shear strength, an shear strength.

342

343 The first case involves a railway excavation in Brown London Clay in which failure
344 occurred 46 years after the excavation and illustrates the large strength loss that can occur
345 even in heavily overconsolidated clays due to weathering, softening, and progressive
346 failure processes discussed below. The second involves the decrease in strength that can
347 occur in semi-arid climates due to wet-dry cycles that reduce the peak strength of a
348 compacted soil fill to the FSS. The third case involves the large and rapid decrease in
349 strength from the peak strength to the FSS that can occur upon sustained wetting or soaking
350 of unsaturated soil with high suction pressures. All three cases resulted in slope failure
351 even though using the peak strength resulted in calculated factors of safety significantly
352 greater than unity.

353

354


355 (a) Undisturbed Soil Peak strength v. FSS Case History

356

357 The first case history involves a classic natural cut slope in Brown London Clay and is the
358 first site investigated by Skempton (1970) in terms of effective stresses. The railway
359 excavation at Sudbury Hill occurred in about 1903 and the slope failure occurred in 1949
360 (see **Figure 3**). Effective stress stability analyses by Skempton (1977) of this first-time
361 slide showed the value of effective stress cohesion intercept (c') decreased to a small value
362 during the intervening 46 years. This contributed to Skempton (1970) concluding the
363 softening process results in a decrease in c' with time and it approaches zero (0) after
364 several decades (Skempton, 1970). This decrease in c' with time was attributed to softening
365 caused by many factors including stress relief, applied shear stresses, weathering, and
366 swelling.

367

368

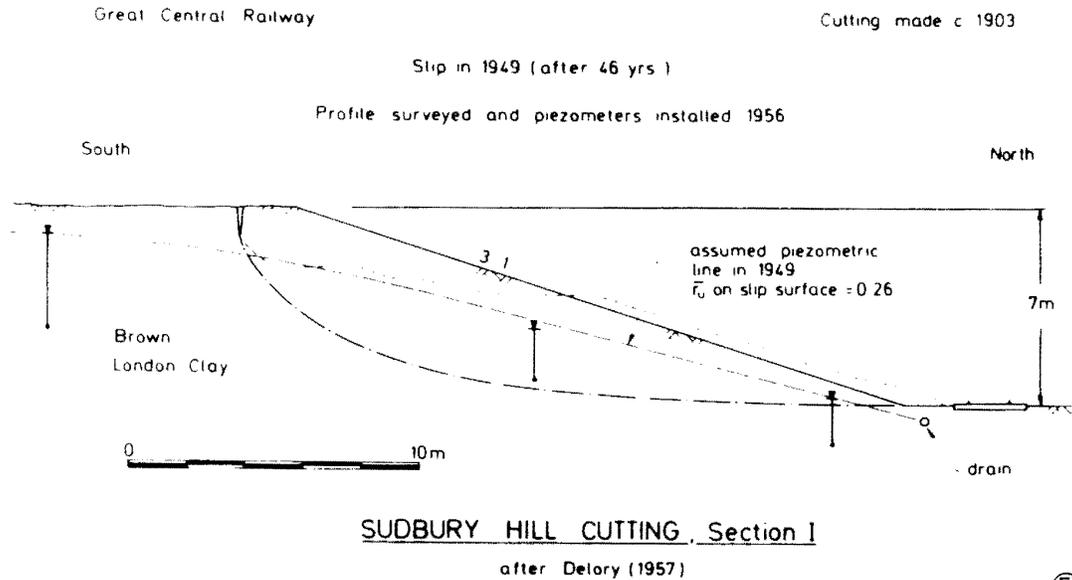

369
 370 **Figure 3.** Slope failure in excavated overconsolidated clay at Sudbury Hill from
 371 Skempton (1977).
 372
 373
 374

375 (b) Compacted Peak strength v. FSS Case History
 376

377 The second case history involves a compacted fill slope that remained stable for about six
 378 years after compaction at a Modified Proctor Relative Compaction greater than 90% and a
 379 moisture content 1 to 3% above optimum. During this time, the compacted fill slope was
 380 wetted by limited precipitation in this semi-arid climate but continuous irrigation by an
 381 automatic sprinkler system. **Figure 4** shows the failed compacted fill slope with a shallow
 382 failure surface due to a limited depth of softening. Inverse stability analyses yielded a
 383 strength that is in agreement with the FSS. This softening from the compacted peak
 384 strength to the FSS is primarily due to dissipation of suction pressures, cycles of wetting
 385 and drying under the applied shear stresses, and development of a piezometric surface in
 386 the compacted fill slope after being initially unsaturated.
 387

388



389
390 **Figure 4.** Slide in compacted fill slope after six years.
391
392
393

394 (c) Desiccated Peak strength v. FSS Case History

395
396 The third case history involves the 1981 upstream slide in San Luis Dam (now known as
397 B.F. Sisk Dam) in California, which is described in VonThun (1985) and Stark and Duncan
398 (1991). Construction of the 305 ft (93 m) high dam was completed in 1967. It is a major
399 off-stream, pumped-storage facility in the California aqueduct system so the dam is
400 frequently subjected to significant fluctuations in reservoir water level (RWL). The slope
401 failure shown in **Figure 5** occurred during an unprecedented drawdown of the RWL by
402 about 180 ft (55 m) in 120 days. The slide was about 1,800 ft (550 m) long along the
403 centerline of the dam crest (Station 120 to 138). Following the slide, field investigations,
404 laboratory testing, and stability analyses were performed and concluded the clayey
405 slopewash material in the foundation below the embankment was responsible for the slide
406 (Stark and Duncan, 1991). The slopewash is a medium to high plasticity clay (liquid limit
407 (LL) = 37 to 45 and plasticity index (PI) = 18 to 21) derived from the weathering and
408 erosion of the sedimentary rocks of the hill incorporated into the dam at this location where
409 the dam has a height of about 200 ft (60 m) (see **Figure 5**).

410



411
412 **Figure 5.** Slide in upstream slope of San Luis Dam in September, 1981 (photo from
413 California Department of Water Resources).
414

415
416 Laboratory direct shear tests were performed and the resulting drained peak, fully softened,
417 and residual shear strengths of the slopewash (Stark and Duncan, 1991) are shown in **Table**
418 **1**. The insitu strength of the highly desiccated slopewash prior to reservoir filling was high
419 because of the large suction pressures created by the semi-arid environment in the Central
420 Valley of California. However, when the slopewash was wetted in a laboratory direct shear
421 device, its strength was reduced immediately to the fully softened value, i.e., same strength
422 as a normally consolidated reconstituted specimen. This behavior is different from that of
423 mechanically overconsolidated clays in which the effects of overconsolidation are not
424 removed upon wetting and thus require years to develop a FSS condition (Skempton,
425 1977).
426

427 In contrast the slopewash, which is overconsolidated by desiccation, quickly reverted to a
428 FSS condition upon soaking by San Luis Reservoir. This strength loss can be repeated in
429 other situations where desiccated soil is wetted by precipitation or an irrigation system
430 causing a significant strength loss and possibly slope instability. For example, at San Luis
431 Dam, the factor of safety of the upstream slope decreased from about 4.0 to about 2.0 with
432 the decrease in strength from the peak to FSS value. Therefore, consequences of wetting
433 in semi-arid climates on shear strength and slope stability can be significant and immediate.
434 The slide in the upstream slope of San Luis Dam was caused by additional strength loss
435 from the FSS caused by shear stresses induced by the various reservoir cycles (Stark and
436 Duncan, 1991) and possibly the colluvial nature of the slopewash.
437
438
439

440
441
442

Table 1. Summary of Measured Slopewash Shear Strengths (from Stark and Duncan, 1991)

Shear Strength Measured	Effective Stress Cohesion (kPa/psf)	Average Effective Stress Friction Angle (deg.)
Peak	278/5,800	39
FSS	0	25
Residual	0	15

443
444
445

(d) FSS v. Residual Strength Case History

447

448 **Figure 2** shows the large range of shear strength that results in overconsolidated or
449 compacted materials, which will result in a large range in calculated factor of safety
450 so selecting the strength envelope that models field conditions is vital to correctly
451 predicting slope behavior and stability. This section uses a case history to illustrate the
452 consequences of selecting a FSS when prior shear displacement has occurred and reduced
453 the strength to or near the residual value even though there is no recent evidence of slope
454 movement.

455

456 The site grading operation for this project involves a large 3H:1V slope excavation at an
457 existing facility. Even though the site is part of a landslide complex, the area of the
458 excavation had not experienced slope movement in known history and was designed using
459 the FSS in accordance with Skempton (1977). However, the slope consists of sheared and
460 slickensided shales, claystones, and mudstones and slid shortly before completion of the
461 excavation as shown in **Figure 6(a)**. **Figure 6(b)** shows a close-up of the slickensided
462 shale/claystone that was obtained at the toe of the slide mass shown in **Figure 6(a)** where
463 it crossed an access road. The slickensided shale is present along the slide surface. An
464 inverse analysis of the slide indicates the mobilized shear strength in this slickensided shale
465 layer was at or near the residual value at the time of sliding (Stark and Eid, 1997). This is
466 important because the randomly oriented slickensided surfaces probably connected to
467 create a continuous surface with a shear strength at or near the residual value and not the
468 FSS even though this could be termed a “first time slide” according to Skempton (1977).

469

470



471
472
473
474
475
476
477

Figure 6. Photographs of: (a) deep slide in shale bedrock in area of no known prior landsliding and (b) close-up of slickensided shale along failure surface.

478 (e) Importance of Difference between FSS and Residual Strengths


479

480 **Figure 7** presents the numerical difference between the fully softened (ϕ'_{FSS}) and residual
481 (ϕ'_r) friction angles for the 64 soils obtained using torsional ring shear tests from Stark and
482 Hussain (2013). **Figure 7** can be used to evaluate the practical significance of determining
483 whether or not a continuous pre-existing shear surface is present or can develop in a slope.
484 In natural soils with a liquid limit between approximately 80 and 140%, it is important to
485 determine whether the slope has a pre-existing shear surface because of the large difference
486 (up to 16 degrees) between ϕ'_{FSS} and ϕ'_r friction angles. If a pre-existing shear surface is
487 located or significant slickensided material are present, a residual friction angle should be
488 utilized for these portions of the failure surface. A large difference between ϕ'_{FSS} and ϕ'_r
489 also identifies soils that have a greater potential for progressive failure because they exhibit
490 a greater post-peak strength loss. As a result, two stability scenarios should be considered
491 for soils that exhibit a large difference between ϕ'_{FSS} and ϕ'_r , which are are a factor of
492 safety (FS) greater than 1.5 using the FSS and a FS greater than unity with a residual
493 strength as discussed in more detail below and in accordance with Stark et al. (2005).

494

495 **Figure 7** also shows the difference in ϕ'_{FSS} and ϕ'_r is greater for shallow failure surfaces,
496 i.e., lower effective normal stresses, than for deep failure surfaces. This is important
497 because most the slope failure in clayey embankments are shallow, i.e., less than 10 ft (3.1
498 m), as discussed below. In soils with a liquid limit less than about 50%, there is a smaller
499 difference (less than 8 and 6 degrees at an effective vertical stress of 1,000 and 8,300 (50
500 to 400 kPa), respectively) between the fully softened and residual friction angles. However,

501 this difference between the fully softened and residual values may still adversely affect the
502 slope design depending on the magnitude of effective normal stress acting on the failure
503 surface in this material. In slopes where there is not a large difference between ϕ'_{FSS} and
504 ϕ'_r and where some uncertainty exists on whether a pre-existing shear surface is present or
505 not, it may be prudent to verify the slope design by assigning an appropriate value of ϕ'_r to
506 the relevant materials and ensuring the resulting factor of safety is greater than unity Stark
507 et al. (2005).
508
509

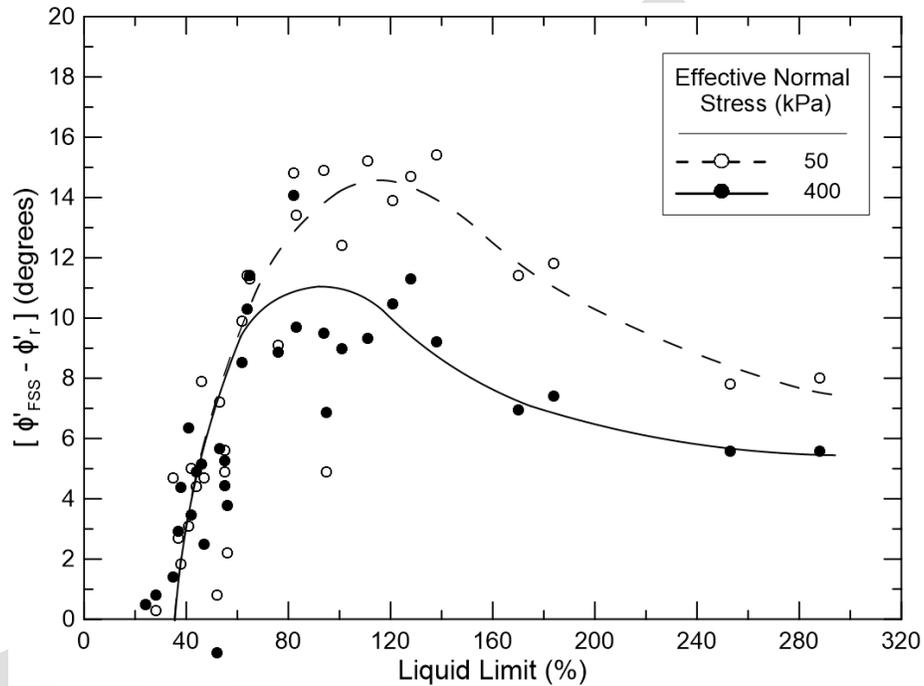

510
511
512
513
514
515
516
517

Figure 7. Difference between secant fully softened and residual friction angles as function of liquid limit from Stark et al. (2015).

518 **5. Development of FSS (Where does it develop?)**

519 This section discusses where practitioners should consider use of the FSS because these
520 slope conditions will result in a strength that is close to the peak strength of soil in a
521 normally consolidated state, i.e., FSS condition. The FSS strength is used to reflect the
522 maximum extent of weathering/softening, increase in moisture content/void ratio, stress
523 relief, and/or progressive failure that can occur under these slope conditions. The two main
524 slope conditions that have resulted in development of a FSS condition based on inverse
525 analysis of the slope failure are: (1) cut or excavated slopes in overconsolidated fine grained
526 soils (see **Figure 8**) and (2) compacted fill slopes or embankments (see **Figure 10**) in semi-
527 arid climates, such as highway embankments and levees. The first section below discusses
528 development of a FSS condition in a cut slope while the second major subsection describes
529 development of a FSS condition in a compacted fill slope.

530
531

532 (a) Cut or Excavated Slopes (Stark)

533

534 In cut or excavated slopes in heavily overconsolidated fine grained soils a fully softened
535 condition can develop due to stress relief, infiltration of water into the macro and micro-
536 structure of the deposit, and continuing physical and chemical weathering (Terzaghi,
537 1936). Softening is defined as an increase in water content and/or void ratio due to
538 expansion of soil particles that creates negative pore-water pressures that draw even more
539 water into the soil as well as the joints and fissures, which provides easy access for water
540 to enter and soften the overconsolidated clay.

541

542 **Figure 8** is a photograph of heavily overconsolidated clay after excavation for a highway
543 widening project. This clay is highly jointed and fissured and it breaks along these
544 discontinuities upon light hand touching as shown in **Figure 8(a)**. These discontinuities
545 result in chunks three to five inches (75 to 125 mm) in length being easily removed from
546 the deposit (see **Figure 8(b)**). The presence and opening of these joints and fissures
547 due to a reduction in the applied stresses, e.g., glacial retreat or slope excavation,
548 results in a jointed clay mass that is susceptible to greater infiltration, which is
549 facilitated by the moist climate near Seattle, and softening. In stiff materials joints
550 and fissures can also be facilitated by shear dilation as pointed out by Henkel and
551 Skempton (1954) using the Jackfield Landslide.

552

553



554
555 (a) (b)
556 **Figure 8.** Photographs of highly jointed and fissured overconsolidated clay: (a) in
557 shallow excavation and (b) close-up of joints and fissures and blocky
558 nature of the overconsolidated clay.
559
560
561

562 Therefore, development of a FSS condition depends on the geologic circumstances present
563 at a site. For example, in heavily overconsolidated clays, such as the excavated clay slope
564 shown in **Figure 8**, a FSS condition can develop via some or all of the steps in the following
565 flowchart (see **Figure 9**), many of which can be occurring at the same time in a slope. For
566 example, infiltration, swelling, weathering will be occurring most, if not, all of the time
567 due to the other factors shown in the flowchart.
568
569
570
571
572
573

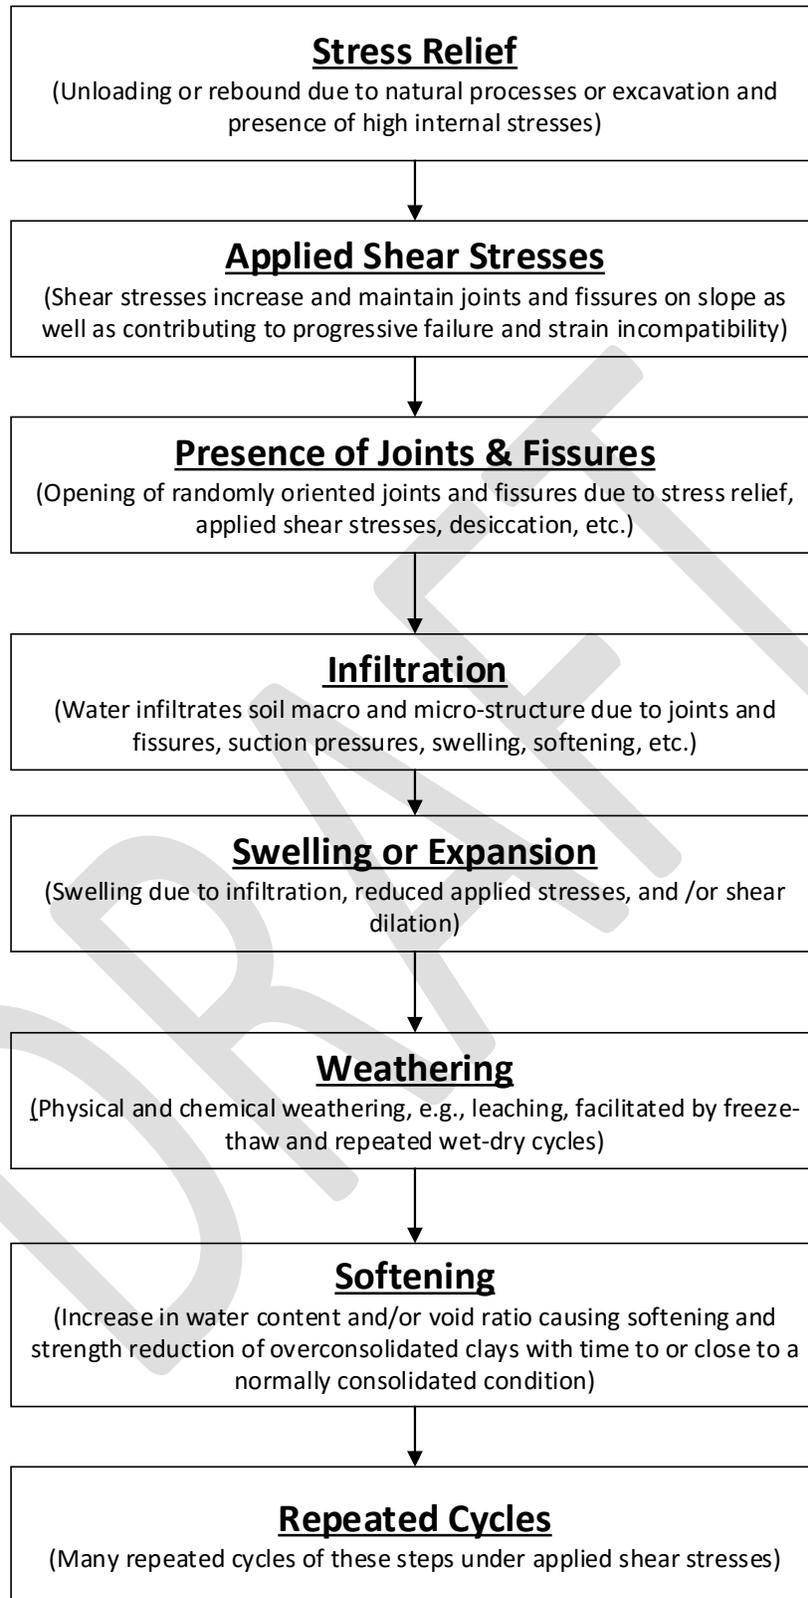


Figure 9. Flowchart depicting development of FSS condition in a cut slope or excavation in heavily overconsolidated clay.

574
575
576
577

578

579 In summary, stress relief and applied shear stress creates, maintains, and increases joints
580 and fissures which allow infiltration into the randomly oriented joints and fissures and
581 subsequent swelling. This can lead to the outer portions of the clay becoming saturated
582 and trapping air in the inner portions (Terzaghi et al. 1996). The pore-water pressures
583 caused by the trapped air can create tension in the soil, which can lead to additional water
584 being absorbed, reduced effective stresses, and softening to a greater depth (Terzaghi et al.
585 1996). As a result, FSS is more likely to develop quicker and to deeper depths in sloping
586 versus level ground sites. FSS is also more likely to develop in uncovered slopes versus
587 covered slopes because water can infiltrate easier. These generalities are used subsequently
588 to present recommendations for possible mitigation measures for reducing the potential for
589 a FSS condition to develop in Section 8 below.

590

591

592

593

- Depth of FSS in Cut Slopes

594

595 The FSS should be used when analyzing the long-term stability of ~~clay embankments or~~
596 excavations or cuts in overconsolidated clay because the softening processes discussed
597 above may have sufficient time to occur. If the slope or excavation will be temporary, a
598 strength greater than FSS may be suitable because there is not sufficient time to fully soften
599 the material using the steps in the flowchart above. If the slope or excavation will be
600 permanent or for a long duration, the depth to which full softening can occur becomes
601 important because it dictates the depth to which the FSS should be applied in stability
602 analyses instead of the peak shear strength. In other words, if the overconsolidated clay is
603 below the depth of softening it can be assigned a shear strength greater than that of the
604 FSS, which facilitates stability and slope design.

605

606 In general, the FSS is more likely to develop at shallow depths because cracks and joints
607 can open to shallow depths and allow water to infiltrate and start, continue, and expand the
608 softening process. This depth could be estimated from the depth of the active zone (CAGE,
609 1999). At deeper depths, the insitu stresses can be high enough to prevent sufficient cracks
610 and joints from opening, which eventually limits water infiltration and softening.
611 Recommendations for searching for the critical failure surface using the applicable peak
612 strength and then assigning the FSS (Mesri and Abdel-Ghaffar, 1993) are discussed below.

613

614 **Table 2** presents depths to failure surfaces in “first-time slides”, i.e., slopes that had not
615 experienced prior landsliding, and should have mobilized a FSS (Skempton, 1977). These
616 depths provide an indication of the depth to which all of the mechanisms, not just those
617 shown in **Figure 9**, can occur and reduce the shear strength of a heavily overconsolidated
618 clay from the peak strength to the FSS. **Table 2** shows the depth to the “first time” slip

619 surface varies from 4 to about 65 feet (1.2 to 19.8 m) which suggests a FSS could develop
 620 in heavily overconsolidated clays from the ground surface to a depth of about 65 feet (19.8
 621 m). Based on **Table 2**, a depth to application of a FSS could be as deep as 60 feet but most
 622 of the case histories indicate a depth of 20 to 25 feet. Therefore, a minimum depth for
 623 applying a FSS should be at least 20 to 25 feet in heavily overconsolidated clay.
 624 However, additional research is needed on the depth to which a FSS should be applied in
 625 slope stability analyses.

626
 627

628 **- Time to FSS for Cut Slopes**

629

630 The FSS condition corresponds to the maximum water content and degree of jointing and
 631 fissuring that the overconsolidated clay will experience for the stress relief, applied shear
 632 stress, and environmental conditions present and illustrated in **Figure 9**. These phenomena
 633 help explain why slope failures in overconsolidated clays can take over 70 years to occur
 634 (see **Table 2**). Substantial time is required even for surficial water infiltration, softening,
 635 weathering, and strength loss to occur because of the low hydraulic conductivity of the clay
 636 matrix. For design purposes, it is recommended that a FSS be used to the depth to which
 637 a FSS will develop for permanent structures. If the project involves a temporary structure
 638 or excavation, the time shown in **Table 2** can be used to estimate how long a peak strength
 639 can be relied upon in stability analyses. In general, if the temporary structure or excavation
 640 will not exceed a duration of three years (shortest duration in Table 2), the insitu peak
 641 strength can be used based on the data in **Table 2**. Additional research is also needed on
 642 the time required to develop a FSS for slope stability analyses because the data in **Table 2**
 643 is limited.

644

645

646

Table 2. Summary of “First-Time Sides” in Overconsolidated Clays

Site Name and Location	Time between excavation and Slide (Years)	Depth of Slip Surface (feet)	Slope Inclination	Reference
Watford By-Pass	7.5	4	1.5H:1V	Skempton (1948)
Kensal Green	28	11	1.5:1	Skempton (1948)
Selset	6	12	2:1	Skempton and Brown (1961)
Walthamstow	47	14	1.5:1	Skempton (1948)

West Acton	50	16	3:1	Skempton (1977)
Crews Hill	47	20	3.3:1	Skempton (1977)
Kingsbury	16	20	2.25:1	Skempton (1977)
St. Helier	22	23	2:1	Skempton (1977)
Sudbury Hill	46	23	3:1	Skempton (1977)
Cuffley	35	24	2.75:1	Skempton (1977)
Mill Lane	40	24	1.5:1	Skempton (1948)
Park Village East	18	26	1.5:1	Skempton (1948)
Hadley Wood	~65	34	3.7:1	Skempton (1977)
Grange Hill	48	40	3.25:1	Skempton (1977)
Wembley Hill	13	45	1.5:1	Skempton (1948)
New Cross	3	56	1.5:1	Skempton (1977)

647
648
649

650 (b) Compacted Fill Slopes (Stark)

651

652 In the 1960s, the Texas Highway Department, now called the Texas Department of
653 Transportation, was experiencing problems with shallow slope failures in highways
654 embankments. A survey of these failures, performed by Abrams and Wright (1972), shows
655 the height of the slopes that failed range from 20 ft to 40 ft, with slope inclinations ranging
656 from 2H:1V to 3H:1V. Abrams and Wright (1972) found the majority of the failures were
657 occurring in compacted embankments of high plasticity clays. The failures tended to be
658 shallow and semicircular, did not involve the entire slope, and usually developed numerous
659 years after construction.

660

661 Subsequently, Saleh and Wright (1997) suggest an approximation of the slide depth is 20
662 percent of the slope height (H) or:

663

664 Slide Depth= 0.2 *H (2)

665

666 Rogers and Wright (1986), Kayyal and Wright (1991), and Wright et al. (2007) used
667 triaxial compression tests to show that cycles of wetting and drying can decrease the
668 drained peak shear strength of compacted high plasticity clays toward a lower
669 boundary that is about equal to the FSS. Similarly, Kovacevic et al. (2001) show that
670 cycles of wetting and drying can also cause progressive failure to develop in
671 compacted clay embankments, thereby decreasing the mobilized shear strength.
672 Wright et al. (2007) found that although cycles of wetting and drying decrease the shear
673 strength, it is not always decreased to the FSS.

674

675 Based on these studies, it appears that weathering, described below, is the main cause of
676 the decrease in shear strength in compacted clay embankments although progressive failure
677 may also play a role in this process. Therefore, development of a FSS condition depends
678 on the environmental circumstances present at a site. For example, in the compacted levee
679 system shown in **Figure 10** a FSS condition can develop via some or all of the steps in the
680 following flowchart (see **Figure 11**), many of which can be occurring at the same time in
681 a slope. For example, infiltration, swelling, weathering will be occurring most, if not, all
682 of the time due to the other factors.

683

684




685

686

687

Figure 10. Photograph of shallow slides in levee system embankment

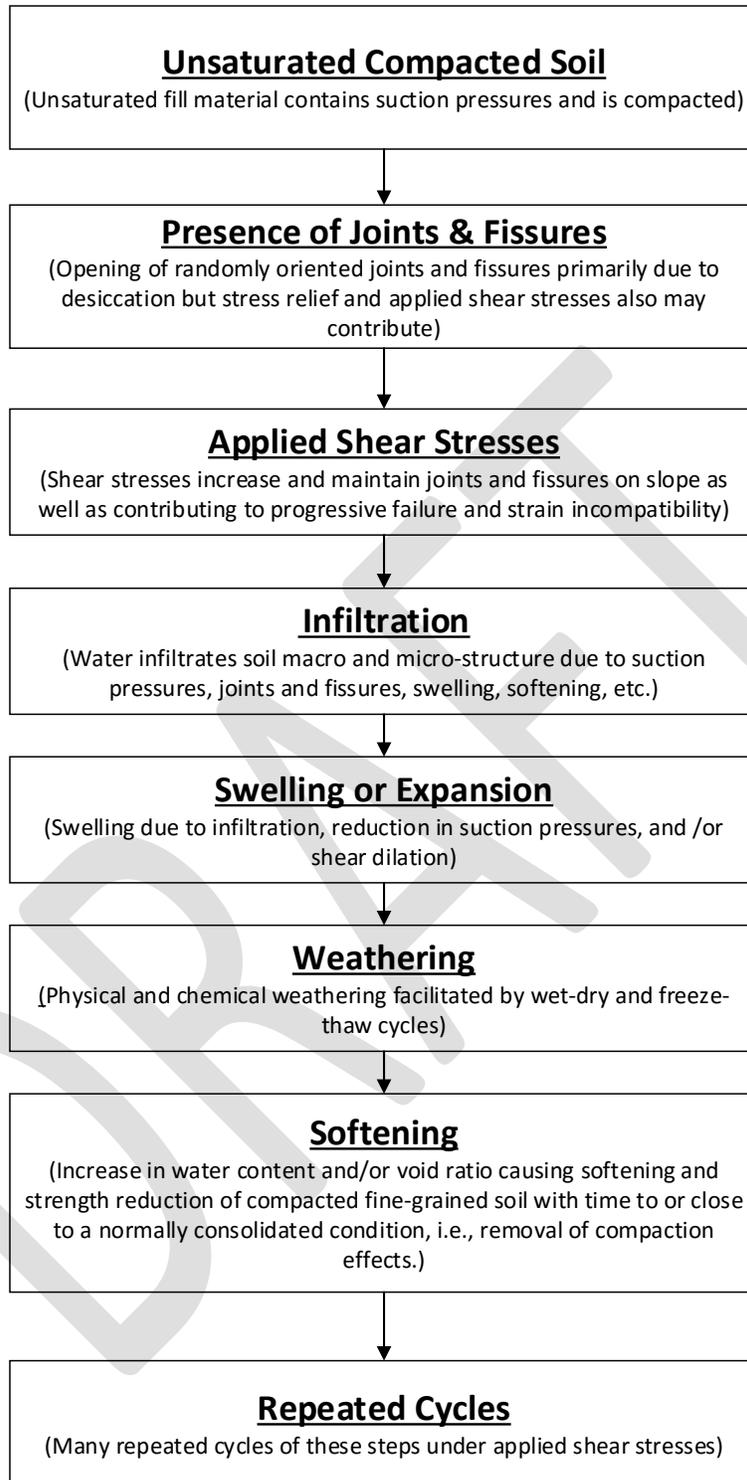

688
689
690
691
692

Figure 11. Flowchart depicting development of FSS condition in a compacted embankment.

693 These steps are in general agreement with Terzaghi (1936) which describes it as water
694 accumulating in fissures and the clay swelling under zero pressure along the walls of the
695 open cracks. This nonuniform swelling weakens the soil fragments and new cracks form
696 causing a progressive softening and loss of strength (Terzaghi, 1936).
697

698 The U.S. Army Corps of Engineers (USACE, 1983) and Stauffer and Wright (1984)
699 document 74 case histories of first-time slope failures in compacted clay embankments.
700 **Table 3** presents the 37 first time slope failures from Stauffer and Wright (1984) because
701 data on the time to failure and the depth of the observed slip surface are available. These
702 case histories show that these embankment failures share the following characteristics:
703

- 704 • Soils consist of mostly high plasticity clays with liquid limit and plasticity index
705 greater than 40 and 20, respectively,
- 706 • Failures were usually less than 5 feet (1.5 m) deep, and
- 707 • Failures mostly occurred less than 20 years after construction.

708
709 This suggests that slopes constructed of fine-grained soils with liquid limit and plasticity
710 index less than 40 and 20, respectively, are not susceptible to as large a strength reduction
711 due to the softening mechanisms discussed above.
712
713
714
715
716
717

718
719

Table 3. Summary of “First-Time” Sides in Compacted Fill Slopes from Stauffer and Wright (1984).


Site Name and Location	Time between excavation and Slide (years)	De of Slip (fe
IH 610 at Scott St., NE quadrant, Harris Co.	17	1
SH 225 at SH 146, SW quadrant, Harris Co.	31	1
SH 225 at SH 146, NW quadrant, Harris Co.	31	0
SH 225 at SH 146, NE quadrant, Harris Co.	31	1
SH 225 at Southern Pacific RR Overpass, SE quadrant, Harris Co.	20	1
SH 225 at Southern Pacific RR Overpass, SE quadrant, Harris Co.	20	1
SH 225 at Southern Pacific RR Overpass, SW quadrant, Harris Co.	20	1
SH 225 at Southern Pacific RR Overpass, NW quadrant, Harris Co.	20	0
IH 225 at Scarborough, SE quadrant, Harris Co.	17	1
IH 610 at SH 225, SE quadrant, Harris Co.	19	0
IH 610 at Richmond St, SW quadrant, Harris Co.	18	1
IH 10 at Crosby-Lynchburg, NW quadrant, Harris Co.	25	1
IH 45 at SH 146, SE quadrant, Harris Co.	14	1
IH 45 at SH 146, south side, Harris Co.	14	1
IH 45 at FM 2351, NE quadrant, Harris Co.	12	0
IH 45 at College St., NE quadrant, Harris Co.	18	0
U.S. 59 at FM 525, NE quadrant, Harris Co.	24	1
U.S. 59 at Shepard St., SE quadrant, Harris Co.	22	1
U.S. 79 at U.S. 95, SE quadrant, Williamson Co.	11	2
U.S. 77 at SH 21, SW quadrant, Lee Co.	19	1
U.S. 77 at SH 21, NW quadrant, Lee Co.	19	1
U.S. 290–5 miles east of IH 35, NW quadrant, Travis Co.	–	–
U.S. 77 at SH 21, NW quadrant, Lee Co.	16	2
U.S. 87 at Loop 175, NW quadrant, Victoria Co.	19	1
Loop 286 at SH 271 Interchange, NW quadrant, Lamar Co.	14	1
Loop 286 at Missouri Pacific RR Overpass, SW quadrant, Lamar Co.		
Loop 286 at SH 271 Interchange, NW quadrant, Lamar Co.	18	2
Loop 286 at Missouri Pacific RR Overpass, SW quadrant, Lamar Co.	18	1
Loop 286 at Missouri Pacific RR Overpass, SW quadrant, Lamar Co.		
Loop 286 at Missouri Pacific RR Overpass, NW quadrant, Lamar Co.	–	–
Loop 286 at Missouri Pacific RR Overpass, SW quadrant, Lamar Co.	18	3
Loop 286 at FM 79, SW quadrant. Lamar Co.	19	1
Loop 286 at FM 79, SW quadrant. Lamar Co.		

720
721

722 (b) Effect of Clay Mineralogy on FSS

723

724 Clay mineralogy has been known to have a significant effect on behavior of soils
 725 (Terzaghi et al., 1996). Despite the substantial influence of clay mineralogy on the
 726 shear strength of soils, little data is available on its influence on the FSS. Tiwari and
 727 Ajmera (2011) prepared thirty-six laboratory samples from sodium montmorillonite,
 728 kaolinite, and quartz. These samples were used to measure the FSS at four different
 729 normal stresses ranging from 1,000 to 4,200 psf (50 to 200 kPa). **Figure 12** shows
 730 the relationship between clay content (% passing No. 200 sieve) and the average fully
 731 softened friction angle, which separates the soils in terms of mineral composition.
 732 This data shows the type and amount of clay mineral substantially affects the FSS. In
 733 particular, the data indicates that mixtures of montmorillonite with quartz exhibit a
 734 fully softened friction angle that follows two distinct trends: (1) soils with less than
 735 25% clay mineral content and (2) soils with greater than 25% clay mineral content.
 736
 737

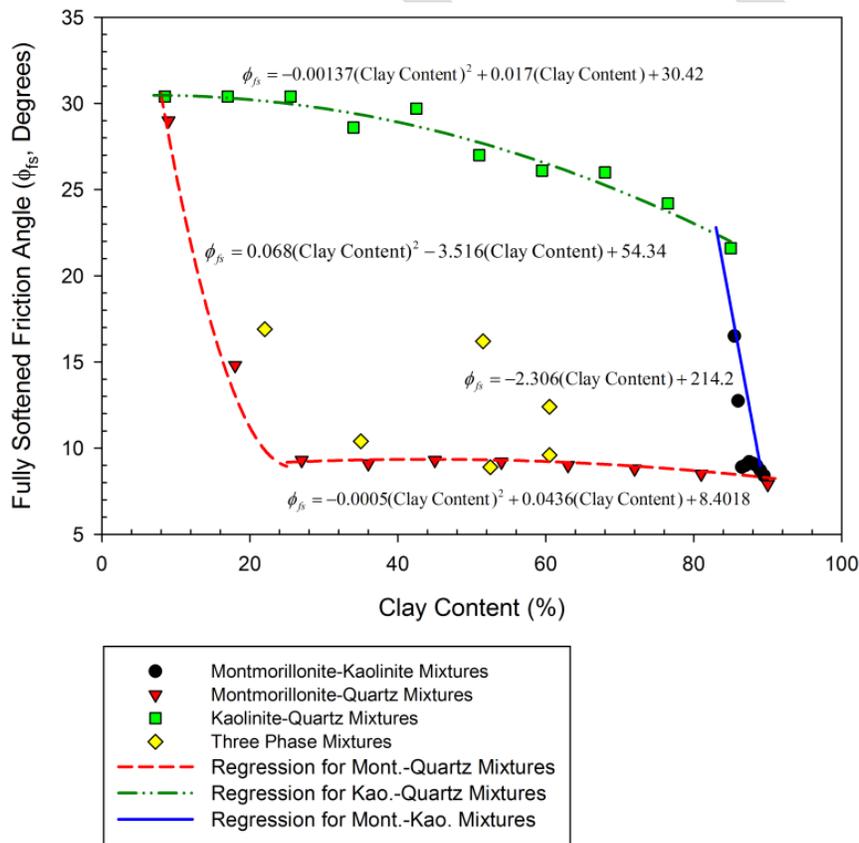

738


739 **Figure 12.** Relationship between fully softened friction angle and clay content
 740 from Tiwari and Ajmera (2011).

741


742

743 This data was used to develop a relationship between fully softened friction angle and
 744 liquid limit, which is shown in **Figure 13**. In these two phase mixtures, the fully
 745 softened friction angle can be estimated from the relationship presented in **Figure 13**.

746 A similar relationship between the plasticity index and the fully softened friction angle is presented in **Figure 14**. For this case, although it was possible to generalize
 747 the relationship in terms of mineralogical composition, different correlations were
 748 noted for soils with plasticity indices less than 80 and for soils with plasticity indices
 749 greater than 80.
 750
 751

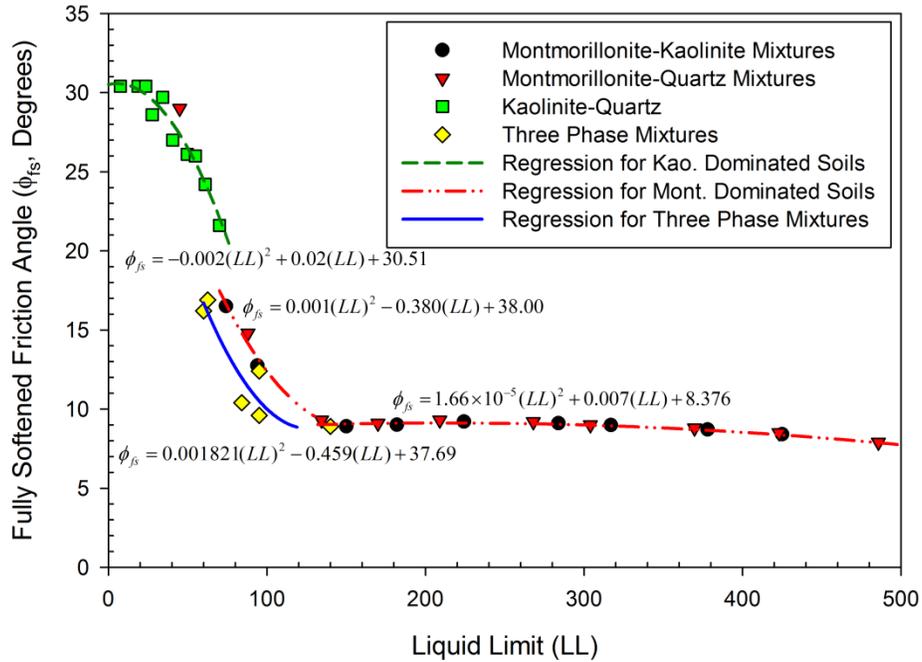

752 **Figure 13.** Relationship between liquid limit and fully softened friction angle
 753 from Tiwari and Ajmera (2011).
 754
 755

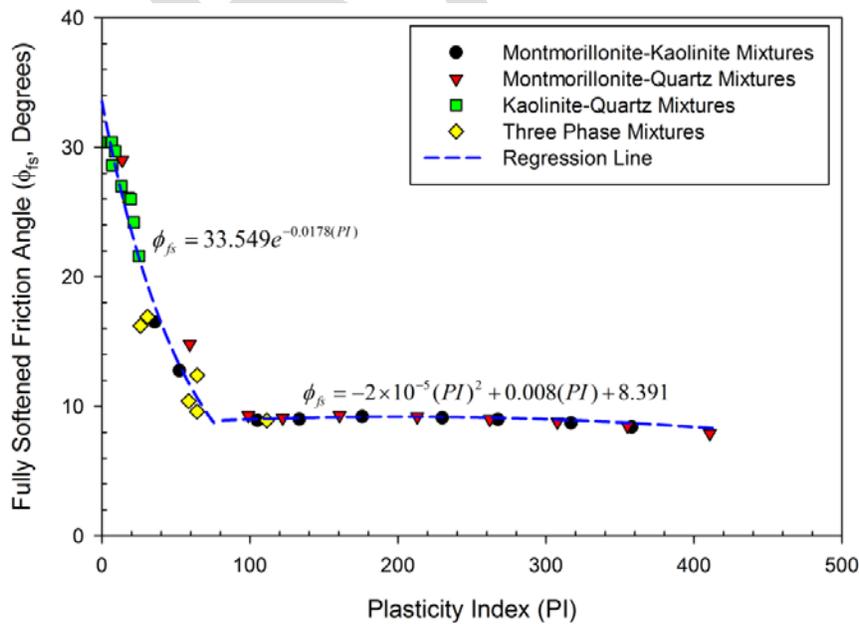

756 **Figure 14.** Relationship between fully softened friction angle and plasticity index
 757 from Tiwari and Ajmera (2011).
 758

759

760 (c) Effect of Pore-Water Chemistry on FSS

761

762 It is well known that the shear strength of clays is controlled in part by adsorbed cations
763 (Mitchell 1993). Recent research indicates that clay mineralogy and system chemistry may
764 have a more significant influence on the strength behavior than once thought. The
765 weathering process involves cation exchange of adsorbed ions on clays, particularly
766 smectites. However, little research has been conducted on the effects of system chemistry
767 (pore fluid) on the FSS. Tawari and Ajmera (2014) present data on pore-water chemistry
768 effects on FSS and determined the FSS for mixtures of montmorillonite, kaolinite, quartz,
769 powdered and reconstituted intact rock, and slide surface materials using distilled and
770 saline (NaCl) waters. The test results show little effect on FSS on the mineral mixture
771 samples. However, large effects on FSS were found with the intact rock and sliding surface
772 materials. For these tests, the samples with saline water had significantly higher FSS than
773 those tested with distilled water (see **Figure 15**). Tiwari and Ajmera (2015) use these
774 results to conclude:

775


- 776 • FSS is reduced with reductions in NaCl pore fluid concentration, especially for
777 soils with more than 9,5% montmorillonite content. The reduction in fully
778 softened friction angle with NaCl leaching increases with the initial concentration
779 of NaCl in the pore fluid. As a result, this behavior should be considered in
780 coastal areas or marine deposits.
- 781 • The effect of NaCl concentration in the pore water on the FSS was negligible or
782 even opposite for the soils containing 9.5% or less montmorillonite content or
783 kaolinite as the dominant clay mineral.
- 784 • There is a good relationship between the ratios of liquid limit or plasticity index
785 and NaCl concentration and FSS.

786

787 These findings indicate the chemical makeup of the water used in preparing reconstituted
788 samples can have an effect on the measured FSS and should be a consideration when
789 developing a FSS testing plan and when selecting the FSS for use in stability analyses.

790

791

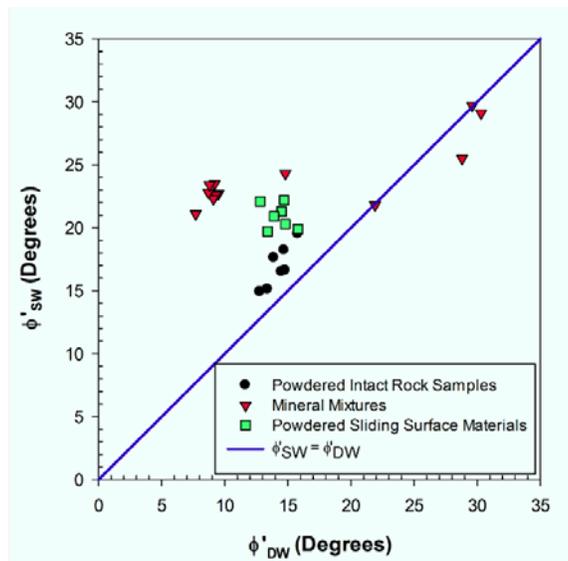

792
793
794
795
796
797
798
799
800
801

Figure 15. Comparison of fully softened friction angle of mineral mixtures prepared with distilled water (DW) and saline water (SW) for powdered and reconstituted intact rock specimens before and after NaCl leaching and powdered and reconstituted sliding surface materials (from Tiwari and Ajmera, 2014).

802

803 **6. FSS Measurement and Representation (How do I measure it?) (Stark)**

804 This section discusses techniques for measuring and representing the FSS for use in slope
805 stability analyses. This includes applicable shear device or apparatus, specimen
806 preparation, shear displacement rate, hydration, and data interpretation. The objective of
807 the specimen preparation and shear testing is to measure the peak strength of normally
808 consolidated randomly oriented particles in accordance with Skempton (1970).
809 Techniques for measuring the FSS is a topic of ongoing research so this section presents
810 the current state-of-the-art and state-of-the-practice and references that can be pursued for
811 future study.

812

813

814 (a) Shear Devices

815

816 Three laboratory shear devices, i.e., triaxial compression, direct shear, and torsional ring
817 shear, have been used to measure the FSS and each are reviewed in this section. The first
818 test discussed in triaxial compression.

819

820 The fully softened shear strength has been measured using the triaxial compression test
821 since Skempton (1970) introduced the FSS concept to slope stability analyses (Gibson
822 1953; Bishop et al. 1965; Skempton 1977). Values of FSS measured using the triaxial
823 compression test are in agreement with the average mobilized strength along the observed
824 slip surface from inverse analyses of first-time slides (Skempton, 1977). However, there
825 are some challenges with performing consolidated-drained (CD) triaxial compression test
826 (ASTM D7181) on a normally consolidated fine-grained specimen especially at low
827 confining pressures to simulate shallow slip surfaces, such as:

828


- 829 • having to support the specimen with a mold during preparation because of the high
830 moisture content of the reconstituted material,
- 831 • difficulty in testing at low confining stresses due to end and piston friction and
832 supporting the specimen, which are important because the FSS strength envelope
833 is effective normal stress dependent at low confining stresses, and
- 834 • length of time to perform an isotropically CD triaxial compression test because of
835 the low hydraulic conductivity of fine grained soils and length of drainage path.

836

837

838 The fully softened shear strength should not be measured using isotropically consolidated-
839 undrained (CU) triaxial compression tests (ASTM D4767) with pore-water pressure
840 measurements and using stress-path tangency to define the drained friction angle. The
841 drained friction angles obtained from such CU triaxial compression tests are not in
842 agreement with the values obtained from direct shear (Duncan et al., 2015) and CD triaxial
843 compression tests (Skempton, 1970). For example, **Figure 16** shows drained friction
844 angles for normally consolidated clays from southeast Louisiana and the CU triaxial

845 compression values are significantly greater than the drained direct shear values. The CU
 846 triaxial compression values are significantly greater than drained direct shear probably due
 847 to: difficulties in achieving full saturation of the specimen prior to shear, i.e., achieving a
 848 pore Skempton (1954) pressure coefficient, B, of unity and all of the shear-induced pore
 849 pressures not migrating quickly from the mid-height and middle of the specimen to the top
 850 and bottom platens to be measured and reflected in Skempton's (1954) pore pressure
 851 coefficient A. In particular, if the B value is less than unity the specimen contains suction
 852 pressures which contribute to the shear resistance. If all of the shear-induced pore pressures
 853 are not measured, the resulting effective stress is over-estimated which reduces the
 854 effective stress friction angle or strength envelope by plotting the measured deviator stress
 855 at a higher value. In addition, back-pressure saturation of a fine grained specimen to
 856 perform a CU triaxial compression test with pore-water pressure measurements is difficult
 857 and time-consuming to achieve full saturation in a commercial laboratory.
 858
 859

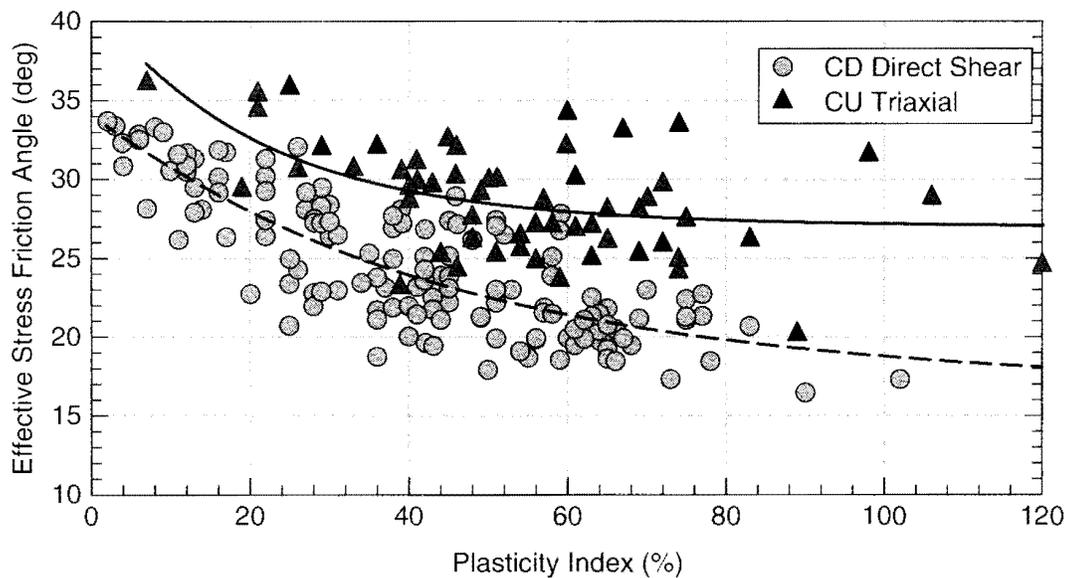

860
 861 **Figure 16.** Drained friction angles determined from C-U triaxial compression and C-
 862 D direct shear tests on southeast Louisiana alluvial clays (from Duncan et
 863 al., 2015).
 864
 865
 866

867 Because of challenges performing CD triaxial compression tests, the inapplicability of
 868 CU triaxial compression tests, and the availability of direct shear devices (ASTM
 869 D3080), the FSS also has been measured using the direct shear apparatus. In addition,
 870 a direct shear specimen is initially about one-inch thick prior to consolidation so it is
 871 possible to locate the shear surface within the specimen if care is taken during
 872 consolidation as discussed below. However, the direct shear device also has
 873 limitations for measuring the FSS, such as:
 874

- 875
- 876
- 877
- 878
- 879
- 880
- 881
- 882
- 883
- 884
- 885
- 886
- 887
- 888
- 889
- 890
- 891
- 892
- consolidating a high moisture content material and having sufficient specimen above the shear surface after consolidation for proper shearing is difficult because the specimen is near the liquid limit and the top half of the shear box is usually only about one-half inch thick (see **Figure 17**),
 - progressive failure occurs in the normally consolidated specimen,
 - applying enough shear displacement to form a continuous shear surface across the specimen and mobilize the peak strength of the normally consolidated specimen within one travel, i.e., about 0.2 to 0.3 inches, of the shear box,
 - because of the normally consolidated condition of the specimen, a gap can develop at the leading edge of the specimen during shear (see **Figure 17**),
 - setting and maintaining the gap between the upper and lower portions of the shear box,
 - soil extrusion from this gap during consolidation and shear,
 - friction generated if the upper and lower portions of the shear box are not separated sufficiently, and
 - variable cross-sectional area during shear so the results need to be corrected.



893

894 **Figure 17.** Photograph of direct shear specimen after shearing at an effective normal

895 stress of only 3,016 psf showing little soil in the top shear box and a gap

896 between the soil and the shear box wall in the top box (right photograph)

897 indicating progressive failure and change in specimen area.

898

899

900 Some of the limitations can be overcome by modifying the test protocol in ASTM D3080

901 to allow repacking the upper shear box with reconstituted material during the consolidation

902 phase to ensure there is sufficient specimen above the shear surface for proper shearing. If

903 a compacted specimen is being prepared, the two halves of the direct shear specimen can

904 be compacted and consolidated in a separate device and then assembled in the shear box so

905 most of the consolidation settlement is removed before placement in the shear box. This
906 ensures sufficient soil is above the shear surface before shearing. Regardless of the
907 procedure, the vertical displacement should be carefully measured during the consolidation
908 and shear phases to determine how much soil is above the gap between the upper and lower
909 portions of the shear box and this information should be included in the test report.
910

911 In spite of these limitations, some researchers have shown some agreement between the
912 FSS measured using CD triaxial compression and drained direct shear even though there
913 is a difference in the mode of shear and test limitations some of which are described above,
914 e.g., De Mello (1946), Skempton (1964), Moon (1984), Thomson and Kjartanson (1985),
915 and Maccarini (1993). Review of these studies indicate most of the reported agreement is
916 due to comparison of linear strength envelopes instead of effective normal stress dependent
917 strength envelopes as highlighted by Stark and Edi (1997). It is now accepted that the FSS
918 is effective normal stress-dependent and comparisons should be made between stress-
919 dependent envelopes, which is a focus of ongoing research.
920

921 Because of the limitations of CD direct shear devices and challenges in performing CD
922 triaxial compression tests, the torsional ring shear device also has been used to measure
923 both FSS and residual strength (Hvorslev, 1960, 1969; Stark and Eid 1997; Stark et al.
924 2005, Stark et al., 2015). The ring shear device was designed by Hvorslev (1936) to
925 investigate the shear stress-displacement behavior of soils because Terzaghi was interested
926 in shear resistance after failure. The ring shear device allows large shear displacements to
927 be applied in one direction to a shear surface, which is sufficient to measure both the FSS
928 and residual strengths using the same or different specimens Hvorslev (1936, 1937, and
929 1939). Therefore, only one device is necessary to measure both fully softened and residual
930 strengths. Some of the other advantages include: constant normal stress, engaging or
931 shearing the entire specimen at one time, an ASTM Test Method (ASTM D7608) is
932 available, and little supervision is required during testing.
933

934 There are number different types of ring shear devices available (Sembenelli and Ramirez,
935 1969; LaGatta, 1970; Bishop et al., 1971; Bromhead, 1979; Sassa, 1992; Gibo et al.; 2002)
936 so understanding the equipment and test procedure is important to obtaining meaningful
937 data (Anderson and Hammoud, 1988) as with direct shear devices. As with the CD triaxial
938 compression and CD direct shear tests, the torsional ring shear device also has limitations
939 for measuring the FSS, such as:
940

- 941 • non-uniform shear displacements across the specimen with the inner portion of the
942 specimen undergoing more displacement than that the outer portion at small shear
943 displacements. This is important in over-consolidated or brittle materials or ring
944 shear devices that have a ratio of the inner radius to the outer radius of the annular
945 specimen less than 0.5 (Hvorslev, 1936). ASTM D7608 requires a ratio greater
946 than 0.6 and a normally consolidated specimen which does not show a large post-
947 peak strength loss.
- 948 • limited availability even though the device is available in commercial laboratories
949 and some state and federal laboratories,
- 950 • small specimen size depending on the device used,

- 951 • soil extrusion if the specimen is shear at mid-height,
- 952 • side wall friction if the shear surface is not near the top of the specimen container
- 953 or the device shears the specimen at mid-height, and
- 954 • in some devices the shear surface occurs near the top porous disc so the roughness
- 955 of the top porous disc should be sufficient to ensure shearing in the soil not along
- 956 the soil/disc interface (see ASTM D7608).
- 957
- 958
- 959

960 (b) Shear Displacement Rate/Test Procedure

961
 962 In CD triaxial compression, direct shear, and ring tests, a shear displacement rate that
 963 corresponds to drained conditions must be used to measure the drained FSS. In other
 964 words, the shear displacement rate should be slow enough to allow the dissipation of pore-
 965 water pressures generated during shear. Guidelines for selecting a drained displacement
 966 rate are presented in the ASTM test methods for the triaxial compression device (ASTM
 967 D7181), direct shear device (ASTM D 3080), and ring shear device (ASTM D7608). Using
 968 higher shear displacement rates can/will result in partial dissipation of the shear-induced
 969 pore-water pressures, soil extrusion in the direct shear and ring shear devices, and can
 970 decrease the measured FSS depending on the level of soil extrusion. The shearing should
 971 continue to a shear displacement that is sufficient to confirm the maximum shear resistance,
 972 i.e., FSS, has been exceeded and the specimen shear resistance is decreasing.
 973
 974

975 (c) Specimen Disaggregation and Preparation

976
 977 Different sample preparation techniques have been used to measure the FSS. The
 978 main difference in these techniques is the level of disaggregation that is achieved
 979 during the specimen preparation process, which impacts the measured FSS and
 980 associated index properties. In general, a greater degree of disaggregation results in
 981 a lower FSS and higher index properties (LaGatta 1970; Townsend and Banks 1974;
 982 Stark et al., 2005). The levels of disaggregation commonly used from least to greatest,
 983 i.e., highest to lowest FSS, are: soaking (ASTM D4318), mortar and pestle (ASTM D
 984 4318), malt or milk shake mixer, kitchen blender or blenderizing, and ball-milling. The
 985 impact of disaggregation on the measured liquid limit (LL) and FSS is illustrated below:
 986
 987

988
$$LL_{\text{Soaking}} < LL_{\text{Mortar}} < LL_{\text{Mixer}} < LL_{\text{Blender}} < LL_{\text{Ball Milling}} \quad (3)$$

989
 990
$$FSS_{\text{Soaking}} < FSS_{\text{Mortar}} < FSS_{\text{Mixer}} < FSS_{\text{Blender}} < FSS_{\text{Ball Milling}} \quad (4)$$

991
 992
 993 The difficulty for practicing engineers is determining the level of disaggregation that will
 994 occur during the slope or project service life. The level of disaggregation desired to


995 simulate anticipated field conditions should be determined before starting testing so the
996 specimen preparation procedure can achieve this level of disaggregation. For example,
997 overconsolidated clays, mudstones claystones, and shales display high degrees of
998 induration (Mesri and Cepeda-Diaz 1986). This induration involves diagenetic bonding
999 between clay mineral particles by carbonates, silica, alumina, iron oxides, and other ionic
1000 complexes. The degree of induration (aggregation) that survives the field softening process
1001 must be selected and simulated in the laboratory sample preparation procedure so the
1002 measured values of FSS reflect this remaining level of induration. For example, if it is
1003 believed the FSS corresponds to a completely disaggregated material, the overconsolidated
1004 clay, claystone, mudstone, shale, etc. should be processed so the specimen material passes
1005 the No. 200 sieve to remove most of the bonding (Stark et al., 2005). As a result, Stark and
1006 Eid (1994) started ball milling heavily overconsolidated clays, mudstones, claystones, and
1007 shales because they possess substantial diagenetic bonding that is usually removed in the
1008 field, especially at residual strength situations. This level of disaggregation cannot be
1009 achieved using a typical mortar and pestle in the laboratory and passing the material
1010 through the No. 40 sieve as required by ASTM D4318 to measure Atterberg Limits.

1011
1012 Conversely, soil compacted into a levee or highway embankment is usually sufficiently
1013 disaggregated that it can be processed with a lesser degree of disaggregation than ball-
1014 milling, such as, a mortar and pestle, malt or milk shake mixer, or kitchen blender. A
1015 judgment decision needs to be made by the practitioner on the level of disaggregation that will
1016 occur during the field softening process. At present, the industry trend is using a malt
1017 mixer or kitchen blender for levee slope design. Regardless, the practicing engineer and
1018 testing laboratory should clearly describe the method and level of disaggregation used so
1019 designers and regulatory personnel understand the magnitude of FSS being used for slope
1020 design.

1021
1022 Another important consideration in the selection of the level of disaggregation is the
1023 processing should not breakdown or reduce the quantity of silt and coarse grained particles,
1024 i.e., change the gradation, in the representative sample. For example, processing San
1025 Francisco Bay mud, which classifies as a silty clay, should involve soaking, mortar and
1026 pestle, or at most a milk shake mixer so the silt size particles are not reduced or broken
1027 down to a smaller size which could reduce the FSS.

1028
1029 After selecting the level of disaggregation, the specimen preparation process usually
1030 involves the following steps to obtain a reconstituted sample that can be used to measure
1031 Atterberg Limits (ASTM D4318), clay-size fraction (ASTM D422), and FSS under a
1032 normally consolidated condition using soaking or mortar and pestle to disaggregate the
1033 material:


1034
1035
1036
1037

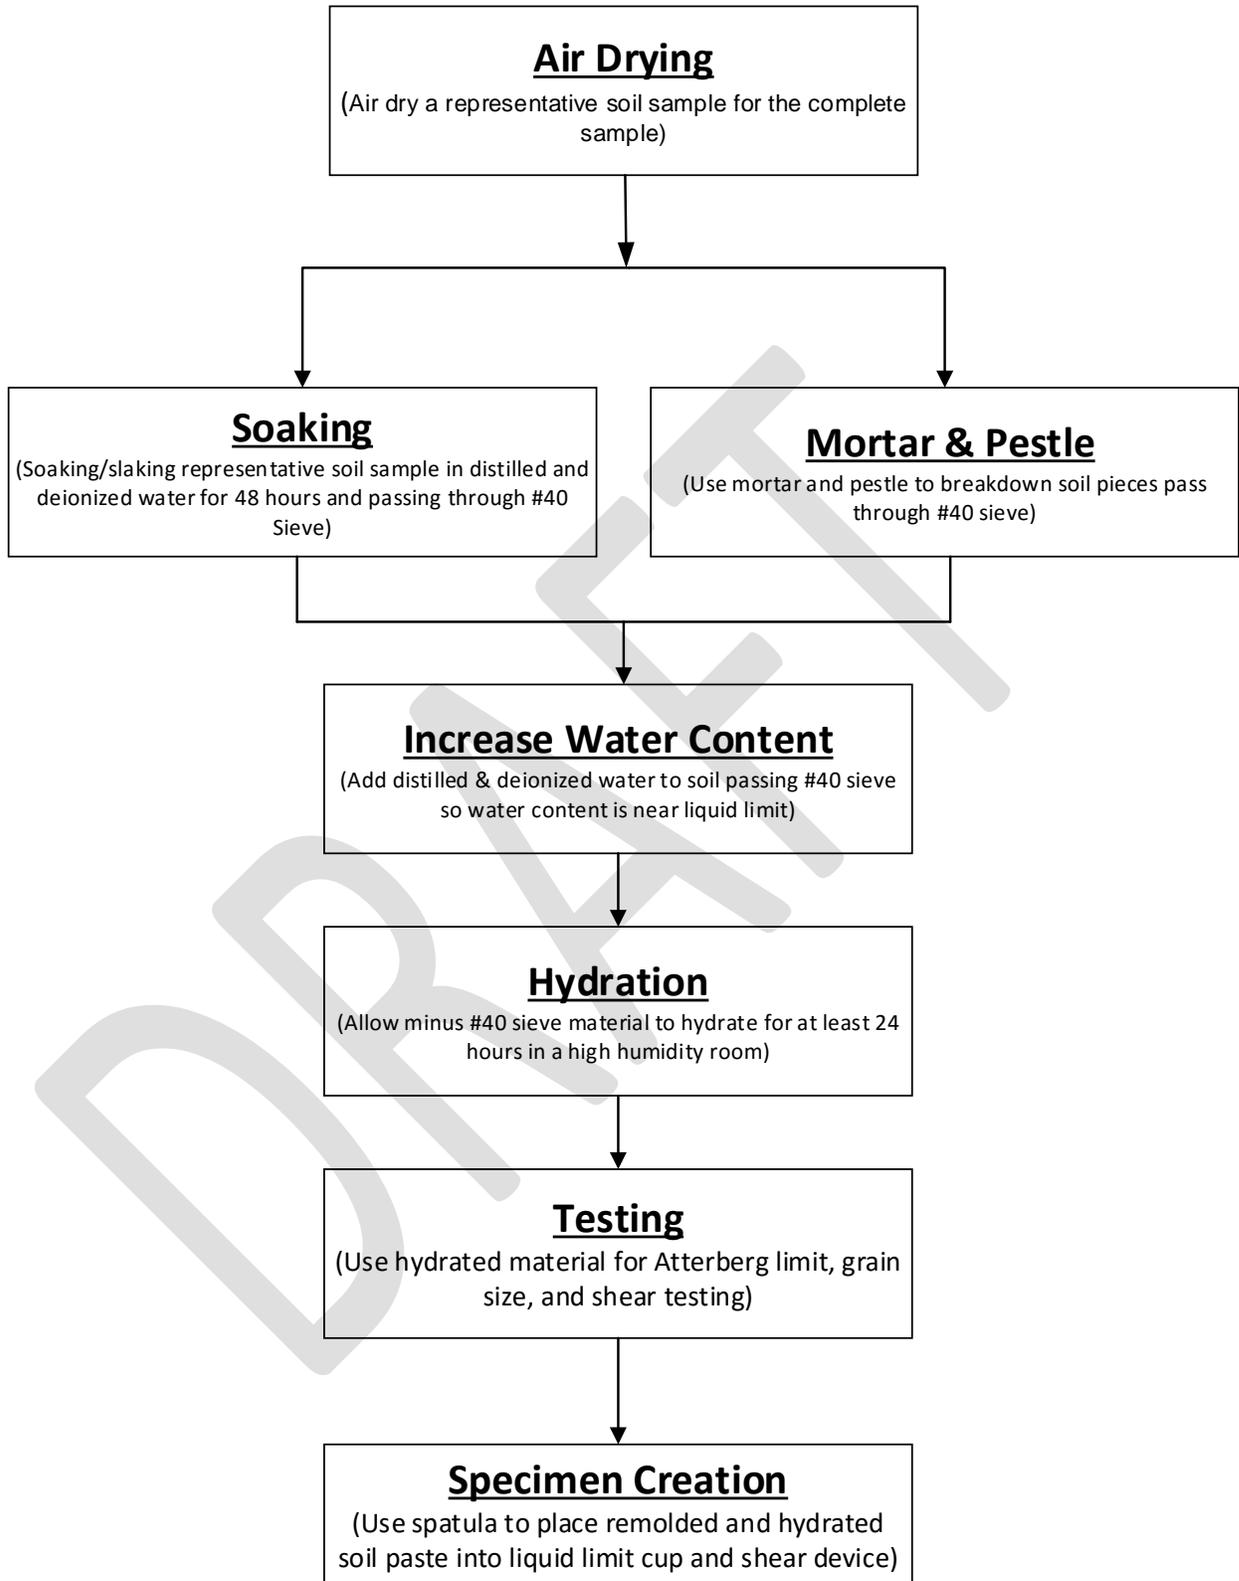

1038
1039
1040

Figure 18. Flowchart depicting reconstituted specimen preparation process by soaking or mortar and pestle for FSS testing.

1041 If a greater level of disaggregation is desired a malt mixer or blender is used. This sample
 1042 preparation process usually involves the following steps to obtain a reconstituted sample
 1043 that can be used to measured Atterberg Limits (ASTM D4318), clay-size fraction (ASTM
 1044 D422), and sheared under a normally consolidated condition:
 1045

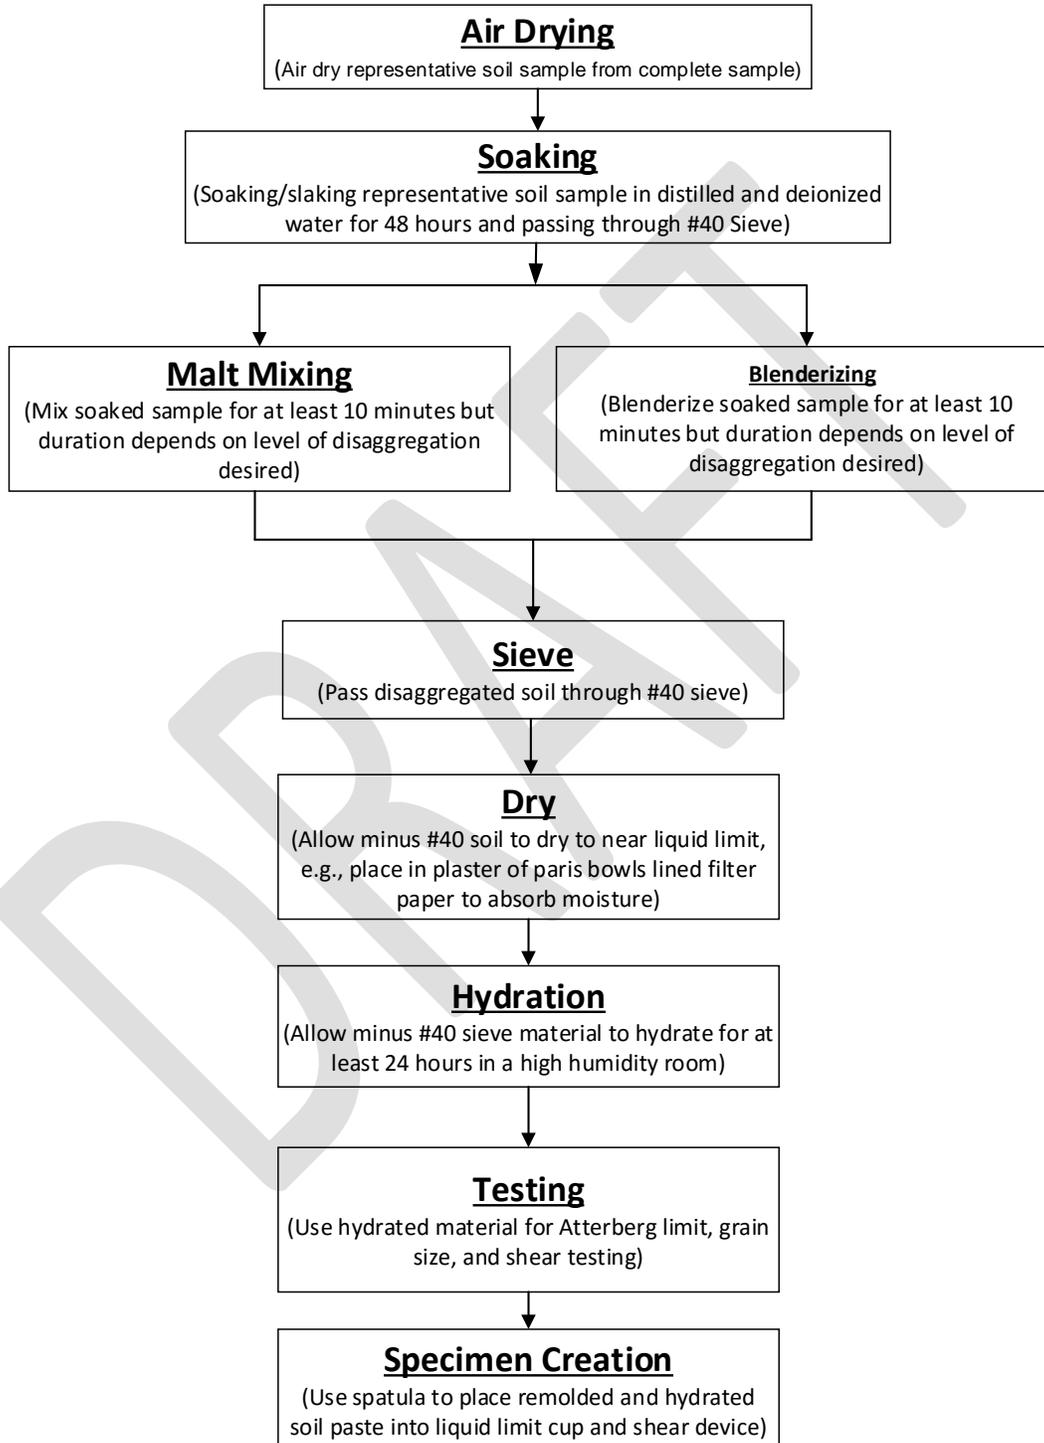

1046
 1047
 1048

Figure 19. Flowchart depicting reconstituted specimen preparation process by malt mixing or blenderizing for FSS testing.

1049

1050 The practicing engineer and testing laboratory should clearly describe the sample
1051 preparation process used so designers and regulatory personnel understand the magnitude
1052 of FSS being used in the subsequent stability analyses. Finally regardless of the shear
1053 device, level of disaggregation, shear displacement rate, and specimen preparation
1054 technique used, the resulting strength envelope should be compared with at least one
1055 empirical correlation, e.g., Gamez and Stark (2014), Mesri and Shahien (2003), Wright
1056 (2005), to ensure the measured strengths are reasonable as discussed subsequently.
1057 For example, if the measured values of FSS envelope plots near a residual strength
1058 correlation, e.g., Stark and Hussain (2013), or significantly above an FSS correlation
1059 (Gamez and Stark, 2014), the test procedure should be carefully reviewed to understand
1060 the cause of the discrepancy. In addition, the results of limited tests should not be used to
1061 conclude one correlation or shear device is better than another because of differences and
1062 challenges in test procedures and interpretation.

1063

1064

1065 (d) Specimen Water Content and Hydration

1066

1067 In all of the above disaggregation techniques, the soils are reconstituted using molding
1068 water contents ranging from below the liquid limit (Stark and Eid 1997; Stark et al. 2005)
1069 to a liquidity index of 1.5 (Gibson 1953; Bishop et al. 1965; Cancelli 1981; Bhattarai et al.
1070 2006; Wright et al. 2007). The molding water content does not significantly impact the
1071 measured FSS because the specimen is normally consolidated prior to shear. However, the
1072 molding water content does impact the magnitude of consolidation settlement during the
1073 consolidation phase and thus whether or not there will be sufficient soil in the upper shear
1074 box in the direct shear device (see **Figure 17**). To facilitate the consolidation process, a
1075 molding water content below the liquid limit is recommended in ASTM D7608.

1076

1077 After reconstituting the specimen at the desired molding water content, it is recommended
1078 that it be allowed to hydrate in a high humidity room to ensure the fine-grained particles
1079 have sufficient time to absorb as much water as desired. ASTM D7608 requires a hydration
1080 time of at least 24 hours. Deionized and distilled water should be used for the hydration
1081 process unless the effect(s) of a different hydration fluid on the FSS is being studied such
1082 as a site specific fluid or a fluid with specific chemistry as described by Tiwari and Ajmera
1083 (2014).

1084

1085


1086 (e) FSS at low effective stresses

1087

1088 First-time slope failures (Skempton, 1970) in compacted embankments (**Figure 10**) and
1089 excavated slopes in overconsolidated clay (**Figure 8**) tend to be shallow so the effective
1090 normal stress acting on the slip surface is low, i.e., less than 2,000 psf. In addition, Stark
1091 and Eid (1997) show the fully softened failure envelope is effective normal stress
1092 dependent or nonlinear, which has important application in slope stability analyses. For

1093 example, slides in levees and other embankment slopes (**Figure 10**) usually exhibit shallow
 1094 slope surfaces with depths of less than 10 ft (3.1 m), which corresponds to an effective
 1095 normal stress of less than 500 psf. Therefore, the shear strength at low effective normal
 1096 stresses is needed for slope stability analyses because large differences in factor of safety
 1097 can be calculated using an effective normal stress-dependent or nonlinear strength envelope
 1098 versus a friction angle that corresponds to the average effective stress along the failure
 1099 surface. For example, **Figure 20**, shows the FSS strength envelope and a friction angle for
 1100 an average effective stress of 1,000 psf ($\phi'_{1,000 \text{ psf}}$). The $\phi'_{1,000 \text{ psf}}$ is lower than the nonlinear
 1101 envelope at effective stresses less than 1,000 psf and greater at effective stresses greater
 1102 than 1,000 psf, which can result in different factors of safety depending on the slip surface
 1103 geometry.

1104
 1105 These differences in calculated factor of safety are caused by not accurately modeling the
 1106 significant stress-dependency of the strength envelope at low effective stresses and the
 1107 location of the critical failure surface being influenced by the effective stresses acting on
 1108 the failure surface. In general, the use of a linear strength envelope, instead of a stress-
 1109 dependent strength envelope, overestimates the depth of the critical failure surface and
 1110 factor of safety obtained in slope stability analysis (McCook, 1999; 2007; 2012, and
 1111 Duncan et al., 2011). This is important because the curvature or nonlinearity is not only
 1112 changing rapidly but is also greatest at effective stresses less than 2,000 psf as shown in
 1113 **Figure 20**. This also means the fully softened secant friction angle decreases with
 1114 increasing effective normal stress as shown by Stark and Eid (1997). This decrease in
 1115 secant friction angle has been attributed to the tendency of the clay particles to a more
 1116 face-to-face orientation with increasing effective normal confining pressure (Mesri and Cepeda-
 1117 Diaz 1986; Kayyal and Wright 1991).

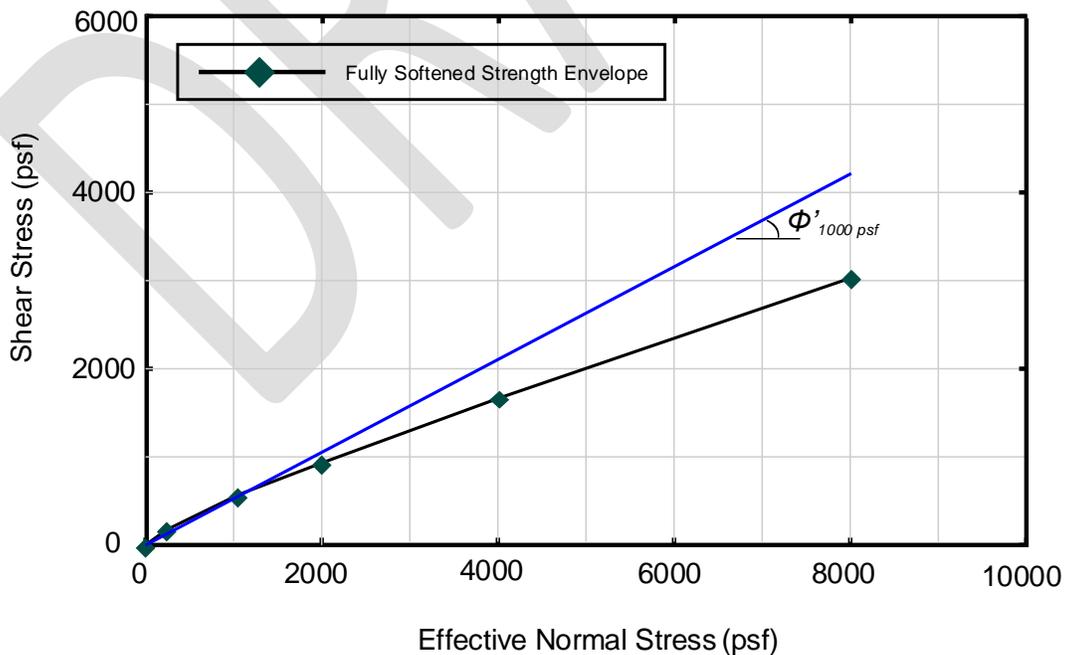

1119
 1120 **Figure 20.** Diagram to illustrate comparison of nonlinear FSS strength envelope and
 1121 an average friction angle.

1122
1123
1124
1125
1126
1127
1128
1129
1130

Regardless of how the effective normal stress-dependent FSS envelope is modeled, a cohesion intercept should not be included in stability analyses because the drained peak strength of a normally consolidated specimen should pass through the origin and not exhibit a cohesion. This is important because the calculated factor of safety is can be greatly influenced by a cohesion parameter especially if a combination of effective stress cohesion (c') and friction angle (ϕ') are used as detailed by Stark et al. (2005).

1131
1132
1133
1134
1135
1136
1137
1138
1139
1140

(f) Representation of effective normal stress-dependent FSS envelope

The effective normal stress-dependent nature of the FSS envelope is now accepted so techniques for modeling the nonlinear or stress-dependent strength envelope in limit equilibrium and continuum analyses are being developed. This comports with other nonlinear drained strength envelopes, e.g., peak (De Mello, 1977; Charles and Watts, 1980; Mesri and Abdel-Ghaffar, 1993), and residual (Stark and Eid, 1994), being modeled using stress-dependent strength envelopes instead of linear strength envelopes.

1141
1142
1143
1144

For example, Mesri and Abdel-Ghaffar (1993) present the following expression for the peak strength of overconsolidated clays and shales, which is modified below for the FSS:

$$\tau_p = \sigma'_n \tan[\phi'] \left[\frac{\sigma'_p}{\sigma'_n} \right]^{1-m}$$

where:

τ_p = peak shear strength on a plane with effective normal stress at failure σ'_n

1145

σ'_n = effective normal stress

(5)

σ'_p = preconsolidation pressure

ϕ' = secant friction angle at failure σ'_n

m = curvature of strength envelope.

1146
1147
1148
1149
1150
1151
1152
1153

Mesri and Shahien (2003) and Lade (2010) rewrote the expression in Equation (5), which is a power function, to model the shear strength in surficial slope failures. With a power function, the slope of the strength envelope is controlled by the parameter “ a ” while the stress-dependency of the strength envelope is controlled by the parameter “ b ” as suggested in Mesri and Shahien (2003). This power function is frequently cited for modeling the stress dependent FSS envelope because large differences in factor of safety can result from using a linear strength envelope (see **Figure 20**). Other functions, e.g., a hyperbolic

1154 function (Duncan and Chang, 1970), a secant friction angle in low plasticity soil where the
1155 curvature is not as pronounced (Stark and Hussain 2013), or a piece-wise linear envelope
1156 based on measured strengths or correlations, also could be used to model the FSS for
1157 stability analyses.

1158
1159 Rewriting the expression in Equation (5), the stress-dependent FSS strength envelope
1160 can be modeled using the following form as suggested by Mesri and Shahein (2003)
1161 and Lade (2010):
1162


1163
$$\tau_{FSS} = a \times P_a \times \left(\frac{\sigma'_n}{P_a}\right)^b \quad (6)$$

1164 where a and b are dimensionless coefficients that control the slope and curvature of
1165 the strength envelope; σ'_n = effective normal stress; τ_{FSS} = fully softened shear
1166 strength; and P_a = atmospheric pressure in the same units as τ_{FSS} and σ'_n (Lade 2010).
1167 With a power function, the overall slope of the strength envelope is controlled by the
1168 parameter “ a ” while the stress-dependency of the strength envelope is controlled by the
1169 parameter “ b ” as suggested in Mesri and Shahien (2003).
1170
1171

1172 Figure 2 presents values of a and b used to predict the FSS envelope for the three clay-size
1173 fraction (CF) groups ($CF \leq 20\%$, $25 \leq CF \leq 45\%$, and $CF \geq 50\%$) in the FSS correlation
1174 by Gamez and Stark (2014). The coefficients a and b can be used with Equation (6) to plot
1175 the stress-dependent FSS envelope using more than the four effective normal stresses used
1176 in the Gamez and Stark (2014) correlation, i.e., 12, 50, 100, and 400 kPa. While the value
1177 of a has a large range for the different CF groups, values of b have little influence on the
1178 power function because b ranges from only 0.839 to 0.969 for all of the CF groups. Thus
1179 the following average values of the b coefficient can be adopted for each of the CF groups:
1180

- 1181 • $CF \leq 20\%$, $b=0.96$;
- 1182 • $20\% \leq CF \leq 45\%$, $b=0.905$; and
- 1183 • $CF \geq 50\%$, $b=0.852$.

1184
1185
1186

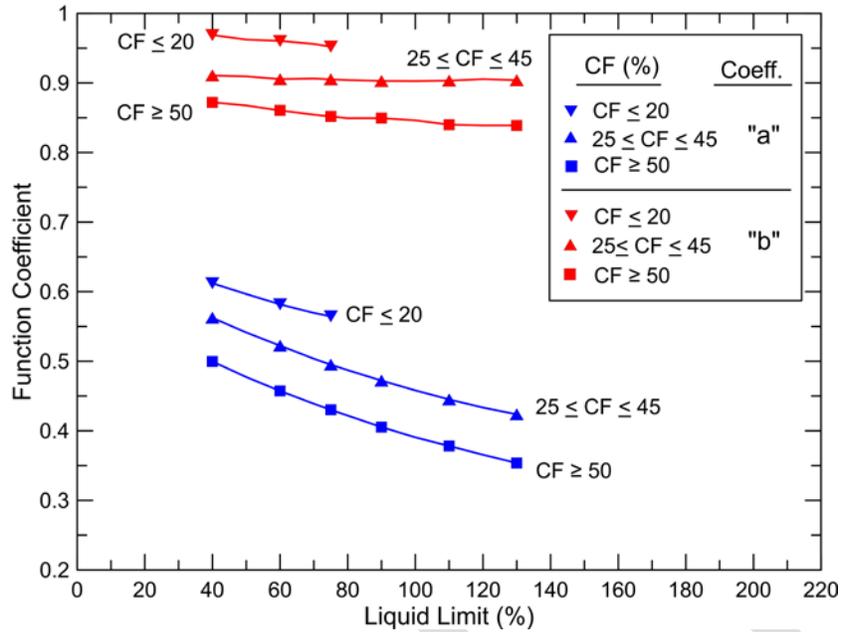

1187

1188 **Figure 21.** Recommended power function coefficients “a” and “b” to estimate FSS
 1189 envelope for the three clay-size fraction (CF) groups in the FSS
 1190 correlation by Gamez and Stark (2014).
 1191
 1192
 1193

1194 (g) Summary

1195

1196 This section discusses techniques for measuring and representing the FSS in slope stability
 1197 analyses. The objective of the shear testing and specimen preparation is to measure the
 1198 peak strength of normally consolidated randomly oriented particles to represent the
 1199 combined effects of weathering, stress relief, applied shear stresses, infiltration, swelling,
 1200 softening, and progressive failure (see **Figure 9**) in accordance with Skempton (1970 and
 1201 1977). Techniques for measuring the FSS is a topic of ongoing research so this section
 1202 presents the current state-of-the-art and state-of-the-practice and references that can be
 1203 pursued for future study.
 1204

1205 In general, the following three laboratory shear devices are being used to measure the FSS:
 1206 triaxial compression, direct shear, and torsional ring shear, and the advantages and
 1207 limitations of each device are described in this section. In all of these shear devices, a
 1208 shear displacement rate that corresponds to drained conditions must be used to
 1209 measure the drained FSS. In addition, the importance of sample disaggregation, e.g.,
 1210 soaking, mortar and pestle, malt mixing, blenderizing, and ball milling, is discussed and
 1211 should be selected to reflect the level of disaggregation expected in the field or desired in
 1212 the slope design. Regardless of the shear device and level of disaggregation, the
 1213 resulting FSS envelope should be compared with at least one empirical correlation,
 1214 e.g., Gamez and Stark (2014), to ensure the measured strengths are reasonable.

1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229

The state-of-the-practice now recognizes the FSS envelope is effective normal stress dependent or nonlinear and should should be modeled in slope stability analyses instead of using a linear strength envelope. In either case, a cohesion intercept should not be included because the drained peak strength of a normally consolidated specimen should pass through the origin and does not exhibit a cohesion. As a result, different expressions are being developed to model the effective normal stress-dependent FSS envelope, such as a power function as recommended by Mesri and Shahien (2003) and Lade (2010) and shown in Equation (6).

DRAFT

1230 **6. FSS Empirical Correlations (Is there an easier way?)**

1231
1232 This section discusses the use of FSS empirical correlations in cut slope and embankment
1233 design and slope stability analyses. The main uses of FSS empirical correlations,
1234 particularly the one developed by Stark et al. (2005), are verifying laboratory shear test
1235 results, planning level or conceptual stage analyses, and initial borrow site selection.
1236 Empirical correlations should not be used for final design unless site specific shear testing,
1237 discussed below, confirms the correlation is applicable to the soils present at the project
1238 site because no correlation has tested the complete range of soil types. As a result, the
1239 topics discussed in this section are: relevant empirical correlation parameters, estimating
1240 the parameters for use in the correlations, verification of laboratory shear test results, and
1241 calibrating or anchoring the correlation for final design with site specific testing.

1242
1243
1244 (a) Relevant correlation parameters

1245
1246 Three main correlations have been published to estimate the FSS envelope based
1247 primarily on the data from Stark and Eid (1997). The first FSS correlation is described
1248 by Stark and Eid (1997), which has been augmented by Stark et al. (2005), Stark and
1249 Hussain (2013), and Gamez and Stark (2014). The other two correlations are
1250 presented by Mesri and Shahien (2003) and Wright (2005) and they use the data
1251 developed by Stark and Eid (1997). All three of these correlations were designed to
1252 estimate the effective normal stress-dependent FSS envelope identified by Stark and
1253 Eid (1997) using the liquid limit (LL), clay-size fraction (CF), and/or Plasticity Index
1254 (PI).

1255
1256
1257 (b) Existing correlations


1258
1259 The liquid limit is used in the FSS correlations as an indicator of clay mineralogy and thus
1260 particle size. As the particle size decreases, the particle surface area increases, the LL
1261 increases, and the drained FSS decreases. However, CF remains an important predictive
1262 parameter of FSS because it indicates the quantity of clay mineralogy, i.e., soil particles
1263 smaller than 0.002 mm. **Figure 22** shows the resulting correlation from Stark and Eid
1264 (1997) augmented by Gamez and Stark (2014). Gamez and Stark (2014) augment the FSS
1265 correlations in Stark and Hussain (2013) to include an effective normal stress of 12 kPa
1266 (250 psf) to approximate the average effective normal stress along typical shallow semi-
1267 circular to planar slip surfaces in various embankments. The resulting strength envelope
1268 passing through effective normal stresses of 12, 50, 100, and 400 kPa is drawn passing
1269 through effective normal stresses of 0, 250, 1,044, 2,088, 8,354 psf and the origin because
1270 uncemented, normally consolidated fine-grained soil does not exhibit a cohesion intercept
1271 (Stark et al. 2005). The resulting FSS envelope can be used directly in a stability analysis
1272 or a power function can be used to increase the number of points used to describe the FSS

1273 envelope. Equations for the trend lines in **Figure 22** have also been developed (see Gamez
1274 and Stark, 2014) and have been incorporated in an EXCEL spreadsheet that is available at
1275 www.tstark.net to facilitate estimating an effective normal stress-dependent FSS strength
1276 envelope for use in stability analyses.
1277


1278 The correlation separates CF into three groups: less than or equal to 20%, greater than or
1279 equal to 25% and less than or equal to 45%, and greater than or equal to 50%. These three
1280 groupings are similar to those presented by Lupini et al. (1981) and Skempton (1985),
1281 which are less than or equal to 25%, between 25 and 50%, and greater than or equal to
1282 50%. The three CF groupings were used by Lupini et al. (1981) to distinguish the
1283 boundaries between rolling shear, transitional shear, and sliding shear behaviors,
1284 respectively. The data in the correlation does not demonstrate a distinct change from
1285 rolling shear to transitional shear so there is a gap in the CF groupings between less than
1286 or equal to 20% and greater than or equal to 25% (see **Figure 22**). A distinct transition
1287 from transitional to sliding shear behavior also was not observed so there is a gap in the
1288 CF groupings between greater than or equal to 45% and greater than 50%. Interpolation
1289 can be used to estimate the secant fully softened friction angle between the three CF groups
1290 in **Figure 22** for a particular effective normal stress.
1291

1292 Because soils are anisotropic and the field stresses in FSS cases are anisotropic, the
1293 laboratory shear conditions should be understood and simulate field shear conditions. The
1294 four trend lines in each CF group in **Figure 22** represent the triaxial compression mode of
1295 shear not the torsional ring shear device mode of shear. In the beginning Stark and Eid
1296 (1997) decided the relevant mode of shear for first slides in cut slopes and embankments
1297 is triaxial compression. This is different than residual strength situations where the ring
1298 shear mode is relevant because the failure surfaces are usually planar (Stark and Eid, 1994).
1299

1300 Using the results of CD triaxial compression tests, not CU triaxial compression with pore-
1301 water pressure measurements, Stark and Eid (1997) introduced an adjustment factor of 2.5
1302 degrees to convert the ring shear mode of shear to the CD triaxial compression mode of
1303 shear so the resulting FSS values better correspond to “first time slides” in cut slopes and
1304 compacted embankments. In particular, Stark and Eid (1997) used CD D triaxial
1305 compression tests at effective confining pressures of 2,088 and 4,178 of to create an
1306 average adjustment factor of 2.5 degrees to convert the ring shear mode of shear to the CD
1307 triaxial compression mode of shear and the peak strength of normally consolidated
1308 randomly oriented particles in accordance with Skempton (1970). Therefore, the fully
1309 softened friction angles presented in **Figure 22** have been increased by 2.5 degrees to
1310 represent the peak strength of normally consolidated randomly oriented particles in “first
1311 time slides” in cut slopes and embankments as described by Stark and Eid (1997) and
1312 subsequent papers.
1313

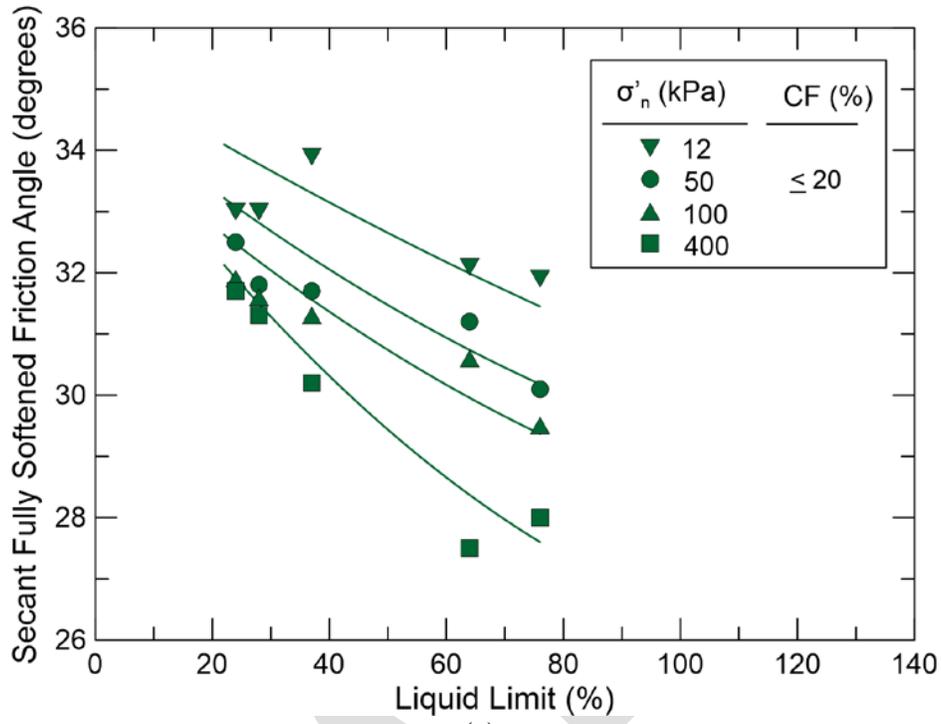

1314
1315

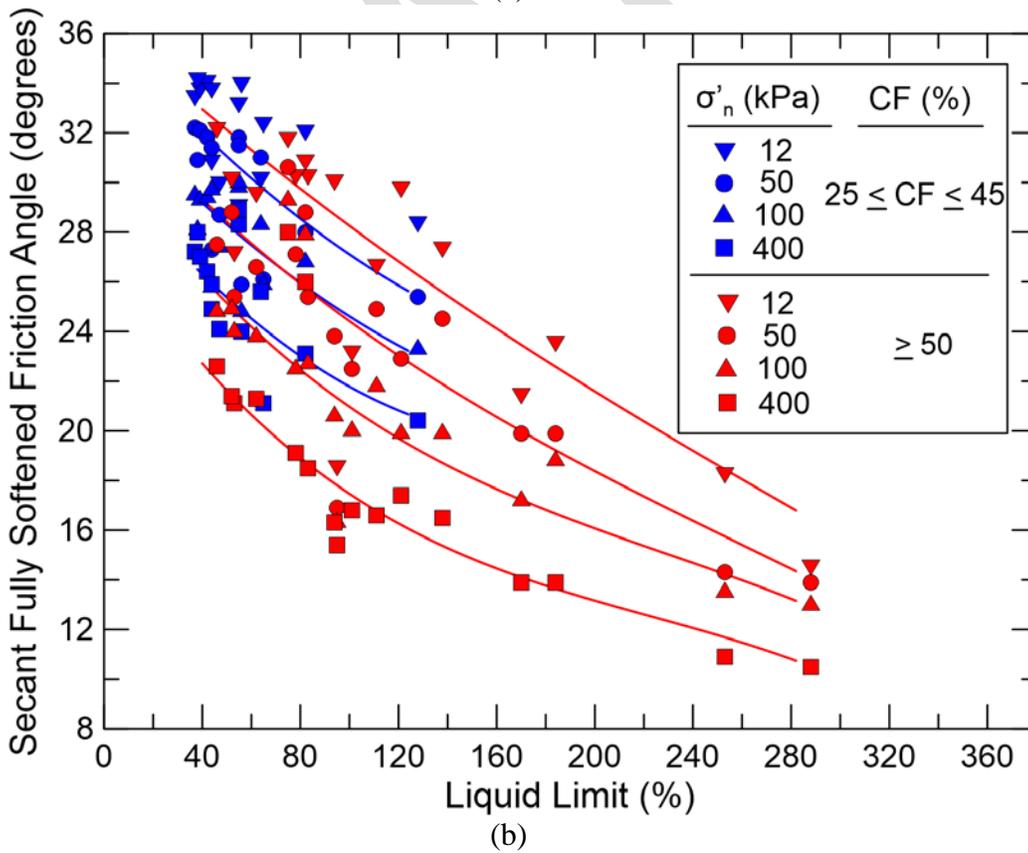

1316
1317
1318
1319
1320

Figure 22. Drained fully softened friction angle correlation for: (a) $CF \leq 20\%$ and (b) $CF > 20\%$ from Gamez and Stark (2014).

1321

1322

1323 (c) Anchoring correlations

1324

1325 This section discusses the “anchoring” or calibration of a FSS empirical correlation with
1326 site specific shear testing to ensure the trend lines used in the correlation are applicable to
1327 the soils present at the project site. Soils are highly variable and can even vary significant
1328 across a particular site such as a long (12 miles) levee system as shown in **Figure 10**. As
1329 a result, the likelihood that existing FSS empirical correlations are representative of all of
1330 the soils at a particular site is low because the database of soils used in a correlation is
1331 limited. Therefore, FSS empirical correlations should not be used for final design of cut
1332 slopes or embankments unless the correlation is anchored or calibrated to determine if it
1333 predicts values of FSS that are in agreement with site specific values. This means the test
1334 results plot within the scatter of the data used to create the trends lines in **Figure 22**.

1335

1336 If the project involves a large or long area, e.g., 12 miles of levee system as shown in
1337 **Figure 10**, that crosses different geologic units, the FSS empirical correlation should be
1338 anchored for each geologic unit, e.g., claystone or shale. Afterwards, the anchored or
1339 calibrated FSS correlation can be useful because sensitivity studies can be performed using
1340 a range of index parameters to investigate slope geometry and inclination, various borrow
1341 sources, and the impact of remedial measures.

1342

1343 Gamez and Stark (2014) recommend a minimum of one soil from each CF group be shear
1344 tested for the full range of normal stresses to ensure the trend lines produce reasonable
1345 effective normal stress-dependent FSS envelopes for other soils across the site. Of course,
1346 the number of soils tested in each CF should increase with increasing consequences of
1347 slope failure. For example, Stark et al. (2015) illustrate anchoring of the Stark et al. (2005)
1348 for the Dallas Floodway project, which serves as a good example for practitioners.

1349

1350

1351

1352

1353 7. FSS in Stability Analyses (How do I apply it?)

1354 This section discusses how the FSS is applied in static slope stability analyses and
1355 appropriate values of factors of safety. This includes location of the critical failure surface,
1356 appropriate values of factors of safety, applicable limit equilibrium methods, pore-water
1357 pressure modeling, and rapid drawdown scenarios. Use of the FSS in dynamic stability
1358 analyses is the topic of a future White Paper.

1359

1360

1361 (a) Critical Slip Surface and Applicable Factors of Safety

1362

1363 For clayey embankments, e.g., levees and highway embankments, the critical semi-circular
1364 to planar failure surface should be located using the drained peak strength because this is
1365 the location of the most detrimental shear stresses in the slope. This is important because
1366 the cut slope/excavation or embankment starts with a peak strength that is reduced to a
1367 fully softened condition which may not have occurred over the entire length of the slip
1368 surface at the time of failure. As mentioned above, applied shear stresses facilitate the
1369 softening process and mobilization of a FSS condition. For design purposes, the critical
1370 failure surface should also be located using a stress-dependent FSS envelope and the lower
1371 factor of safety for these two shear surfaces should be used for design purposes. After
1372 locating these static critical failure surfaces, various shear strengths should be considered
1373 with corresponding factors of safety as discussed below.

1374

1375 **Figure 7** shows a large difference can exist between drained fully softened and residual
1376 strengths with different soil plasticity. Where the difference between FSS and residual
1377 strength is significant, i.e., liquid limit greater than 50, the potential for progressive failure
1378 increases. **Figure 7** also shows shows the difference between FSS and residual strength is
1379 greater for shallow failure surfaces, i.e., lower effective normal stresses, than for deep
1380 failure surfaces. As a result, the following two factor of safety scenarios are presented for
1381 shallow failure surface in clay embankments:

1382

1383 • Use the FSS that represents the level of field disaggregation and full softening
1384 because this will likely occur over the service life of the structure, and meet or
1385 exceed a two-dimensional factor of safety of 1.5 or 1.4 for levees under U.S. Army
1386 Corps of Engineering Manual EM 1110-2-1902 – Slope Stability (2003). If the
1387 FSS is being used and the level of softening will be less than a normally
1388 consolidated specimen and the consequences of failure are small, lower values of
1389 factor of safety may be applicable. These factors of safety are based on a 2D
1390 analysis and should be modified if a three-dimensional (3D) stability analysis is
1391 used (Akhtar and Stark, 2014).

1392

1393 • Use the residual strength for materials that will undergo softening and possibly
1394 shear displacement due to applied shear stresses and meet or exceed a 2D factor of

1395 safety above unity (1.0) if a true residual strength is measured using a torsional ring
1396 shear device. If a reversal direct shear large displacement strength is used, the
1397 factor of safety should meet or exceed a 2D factor of safety of 1.1. If a three-
1398 dimensional stability analysis is used, higher factors of safety should be satisfied as
1399 outlined in Akhtar and Stark (2014).

1400
1401

1402 (b) Representative pore-water pressures

1403

1404 Pore-water pressures are always an important input category for effective stress slope
1405 stability analyses but especially for a FSS analysis because the relevant failure surfaces
1406 are usually shallow, i.e., at low total stresses. This is important because at low total
1407 stresses, small increases in pore-water pressure can cause significant decreases in
1408 effective stresses and thus FSS. The following are some recommendations for pore-water
1409 pressures for use in planning level FSS stability analyses in stiff-fissured and compacted
1410 soils:

1411

1412 • For excavations and slopes in stiff-fissured clays, a pore pressure ratio, i.e., $r_u =$
1413 pore-water pressure (u) divided by total stress (unit weight*depth), of 0.25 to 0.35
1414 is in agreement with inverse analyses of first-time slides in stiff-fissured clays
1415 (James, 1970). James (1970) recommends the lower bound (0.25) for steep slopes
1416 and the upper bound (0.35) for flatter slopes with an average value being 0.30.
1417 Vaughan and Walbancke (1973), Chandler (1972 and 1974), and Skempton
1418 (1977) also use first-time slide case histories to show $r_u =$ varies from 0.2 to 0.30
1419 after 30 years in London Clay slopes. For long-term conditions, pore water
1420 pressures corresponding to steady state seepage should be used.

1421

1422 • For compacted fine-grained soil embankments, r_u of 0.4 to 0.6 is in agreement
1423 with inverse analyses of first-time slides in compacted embankments by Day and
1424 Axten (1989), Lade (2010), and Kayyal and Wright (1991). These values are
1425 significantly greater than the values above for stiff-fissured clays and reflect the
1426 importance of rainfall on shallow failure surface. These values of r_u correspond to
1427 steady state seepage parallel to the slope face for typical embankment
1428 inclinations, i.e., 2H:1V to 5H:1V.

1429

1430

1431 Values of r_u can be input directly into most slope stability software or can be used to
1432 estimate a phreatic surface that can be input in stability software to perform FSS stability
1433 analyses involving in stiff-fissured and compacted soils.

1434

1435

1436

1437

1438 (c) Limit Equilibrium Stability Methods

1439

1440 This section briefly discusses limit equilibrium stability methods that can be used to
1441 estimate the factor of safety (FS) that corresponds to the shear strength slope geometry,
1442 failure surface, and pore-water pressure condition developed for a FSS stability method
1443 using the recommendations above. Duncan et al. (2015) present a much more detailed
1444 treatment of limit equilibrium stability methods that are used to estimate the factor of
1445 safety, which is defined as the shear strength divided by the shear stress required for
1446 equilibrium, i.e., required to close the force polygon.

1447

1448 Each stability method contains a number of assumptions required to make the analysis
1449 statically determinate. The following assumptions are used in most, if not all, stability
1450 methods:

1451

- 1452 • FS is constant along the failure surface,
- 1453 • Strength is fully mobilized along the failure surface assigned that strength, and
- 1454 • Normal force is located at the base and center of each vertical slice.

1455

1456

1457 In general, it is preferred that the selected stability method satisfy all conditions of static
1458 equilibrium because they are better able to accommodate complex slope and failure surface
1459 geometries, pseudo-static forces, and pore-water conditions. Spencer's (1967) method is
1460 a simplification of the Morgenstern and Price (1965) method, which has made it popular
1461 because of its ease and ability to be programmed. However, most slope stability software
1462 now accommodates the Morgenstern and Price (1965) method so this is the preferred
1463 stability method for the reasons below. This method assumes the shear forces between
1464 adjacent vertical slices is related to the normal force at the bottom of the slice, which is
1465 beneficial. Available software packages allow the user to selected different functions to
1466 represent the shear forces along the failure surface so the sensitivity of the FS to interslice
1467 force inclination can be assessed whereas Spencer's (1967) method assumes the resultant
1468 interslice forces are parallel, i.e., inclined at a constant angle, along the entire failure
1469 surface. This simplifying assumption is not correct but yields reasonable values of FS
1470 (Duncan et al., 2015). However, given most slope stability software includes the
1471 Morgenstern and Price (1965) method, this method is more flexible, and is useful in cases
1472 where interslice forces might have a significant effect on the FS (Duncan et al., 2015), it is
1473 recommended for FSS stability analyses.

1474

1475

1476 (d) Time rate of softening in reliability slope stability analyses

1477

1478 Following construction, but prior to reaching a fully-softened condition, cut and fill slopes
1479 comprised of fine-grained soils prone to softening are expected to have drained strengths
1480 that fall somewhere between the peak strength and the normally-consolidated strength. The
1481 use of partially-softened strengths in stability analyses may be warranted when it is desired
1482 to estimate the probability of failure over time. The time rate of softening is influenced by

1483 many factors that are difficult to model including: climate, soil-pore water interaction,
 1484 erosion, formation and deepening of cracks from desiccation and freezing, and the
 1485 availability of surface water and groundwater. Furthermore, softening is not likely to occur
 1486 at the same rate everywhere within the slope. To overcome the difficulty in modeling the
 1487 spatial distribution of softening, a practical approach is to estimate the overall impact of
 1488 softening on strengths along the entire length of a potential sliding surface. The softening
 1489 model proposed by McGuire and Sleep (2015), shown in Equation (7), assumes that
 1490 strength along a potential sliding surface decays exponentially. The parameter, p_{fs} , equals
 1491 the overall degree of softening that has occurred along the entire length of a potential slip
 1492 surface and k is a rate coefficient. A slip surface with a p_{fs} equal to zero has experienced
 1493 no softening and has strengths along its length defined by stress-dependent peak strengths.
 1494 A slip surface with a p_{fs} equal to unity has experienced full softening and has strengths
 1495 along its length defined by stress-dependent, fully-softened strengths.

1497 Because the clay is exposed to environmental conditions that cause weathering, and thus
 1498 softening, from the time it is placed or exposed, it seems reasonable to measure time
 1499 relative to the end of construction. If $p_{fs,r}$ and t_r equal reference values of softening and
 1500 time, respectively, the rate coefficient can be estimated using Equation (8). Information
 1501 compiled from first-time slope failures, e.g., Skempton, 1970, can be used to make
 1502 reasonable estimates of $p_{fs,r}$ and t_r . For example, Henkel (1957) studied strength loss over
 1503 time for London Clay in terms of the decrease in effective cohesion, c' , from peak strength
 1504 ($c'=250$ psf, $p_{fs} = 0$) to what we now refer to as the fully-softened condition ($c'=0$, $p_{fs} = 1$).
 1505 The solid black line in **Figure 23** can be closely represented by Equation (7) using a rate
 1506 coefficient equal to -0.182 years⁻¹ because there is a 72 percent loss of cohesion over 70
 1507 years (i.e. $P_{fs,r} = 0.72$, $t_r = 70$ years). It is possible to determine reliable rate coefficients for
 1508 certain regional soils and construction methods by reviewing available data and collecting
 1509 new data when slope failures occur.

$$1511 \quad p_{fs} = 1 - e^{-kt} \quad (7)$$

$$1513 \quad k = \frac{\ln(1 - p_{fs,r})}{t_r} \quad (8)$$

1514
 1515 The single value of p_{fs} estimated using the proposed softening model for the time of
 1516 interest is applied in Equation (9) to determine the most likely estimate of partially-
 1517 softened strength at a particular normal effective stress, $\tau_{f,ps}$ from the most likely
 1518 estimates of peak strength, $\tau_{f,p}$, and fully-softened strength, $\tau_{f,fs}$.

$$1521 \quad \tau_{f,ps} = (p_{fs})\tau_{f,fs} + (1 - p_{fs})\tau_{f,p} \quad (9)$$

1522
 1523 The coefficient of variation (COV) of the partially-softened strength, $COV_{\tau,ps}$, can be
 1524 estimated from the COV of the peak strength, $COV_{\tau,p}$, and the COV of the fully-softened
 1525 strength, $COV_{\tau,fs}$, using Equation (10). For $0 < p_{fs} < 1$, the value of $COV_{\tau,ps}$ is higher than

1526 $COV_{\tau,p}$ and $COV_{\tau,fs}$ due to the difference between $\tau_{f,p}$ and $\tau_{f,fs}$. McGuire and Sleep (2015)
 1527 describe a method for estimating values of $COV_{\tau,fs}$ and $COV_{\tau,ps}$ using the results from
 1528 laboratory shear strength tests.

1529
 1530


$$COV_{\tau,ps} = \frac{1}{\tau_{f,ps}} \sqrt{(p_{fs})[A] + (1-p_{fs})[B]}$$

1531

$$A = (COV_{\tau,fs} \cdot \tau_{f,fs})^2 + (\tau_{f,fs} - \tau_{f,ps})^2 \tag{10}$$

1532

$$B = (COV_{\tau,p} \cdot \tau_{f,p})^2 + (\tau_{f,p} - \tau_{f,ps})^2$$

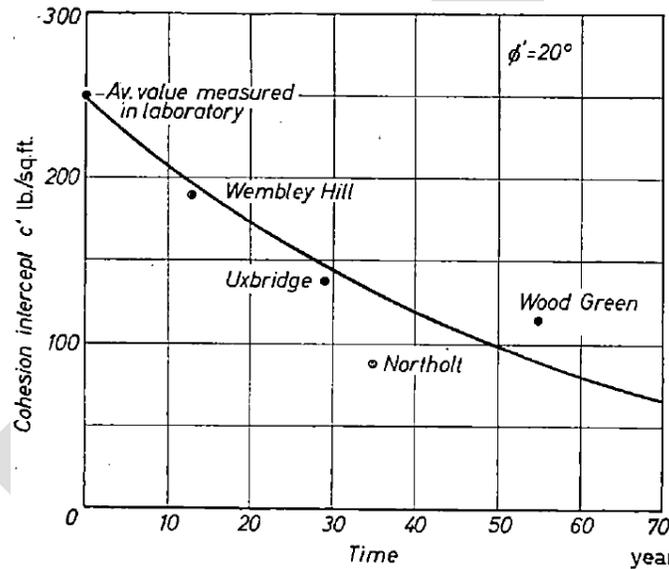

1533
 1534
 1535
 1536
 1537
 1538
 1539
 1540

Figure 23. Degradation of soil strength with time for cut slope failures in London Clay from Henkel, (1957).

1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581

8. FSS Mitigation Measures (How do I limit FSS development?)

This section briefly presents some of the situations where a FSS condition may not develop and remedial measures that can be implemented to delay or prevent development of a FSS condition and thus increase the stability of clay embankment slopes.

The FSS may not be applicable in some situations, such as the long-term stability excavations or cuts in overconsolidated clay because the softening processes discussed above may not have sufficient time to occur. If the slope or excavation will be temporary, a strength greater than FSS may be suitable because there is not sufficient time to fully soften the material using the steps in the flowchart in **Figure 9**. Another situation where the FSS may not develop is in unsaturated material if it will not have access to water, which could occur if the slope is covered.

Saleh and Wright (1997) nicely tabulate a range of possible remedial measures for limiting development of a FSS condition and improving embankment stability. Some of these measures are better suited as a preventive measure than a remedial measure. For brevity, the remedial measures are separated into three broad topic areas: decrease applied shear stress, limit infiltration, and soil stabilization. A few possible remedial measures are presented under each topic area below and interested readers should review Saleh and Wright (1997):

- i. Decrease shear stress
 - flatten or reduce slope inclination,
 - install toe buttress,
 - use lightweight fill, and/or
 - reduce stress relief using retaining wall, excavation bracing, anchors, drilled shafts, etc.
- ii. Limit infiltration
 - cover slope – vegetation, concrete (drains)
 - decrease mowing because it reduces vegetation and can create depressions that facilitate infiltration,
- iii. Soil Stabilization
 - mixing lime into slope material to decrease plasticity
 - adding cement to increase soil shear strength.

1582

1583 **9. Summary and Recommendations (DRAFT)**

1584 The purpose of this White Paper is to explain: fully softened strength (FSS), why
1585 geotechnical engineers should understand FSS, how FSS develops with time, slopes
1586 susceptible to developing a FSS condition, how the FSS can be measured, use of the FSS
1587 in stability analyses, how the FSS differs from drained peak and residual strengths, and
1588 measures that can be implemented to limit FSS development. The following is a summary
1589 of these topics and the main recommendations presented herein:

1590

- 1591 • Cuts or excavations in overconsolidated fine-grained soils exhibit semi-circular to
1592 planar slope failures with a depth from 4 to about 65 feet with a minimum depth
1593 of 20 to 25 feet (6.1 to 7.6 m) for design purposes.
- 1594 • Compacted fine-grained soil embankments usually experience shallow semi-
1595 circular to planar slope failures with a depth less than about 10 ft (3.1 m) or about
1596 20 percent of the slope height,
- 1597 • Fully softened strength is effective normal stress-dependent at low effective
1598 stresses, i.e., shallow depths, and must be modeled in stability analyses because
1599 the factor of safety and location of the critical failure surface is influenced by the
1600 applied effective stresses and shear strength.
- 1601 • A cohesion intercept or strength parameter also should not be used to model the
1602 FSS because it can dramatically increase the factor of safety and does not
1603 correspond to a normally consolidated specimen.
- 1604 • Consolidated-drained triaxial compression, direct shear, and torsional ring shear
1605 can be used to measure the FSS using normally consolidated specimens.
1606 However, the sample preparation and disaggregation, test procedure, and results
1607 must be extensively documented to understand the applicability of the measured
1608 strength values. Regardless of the shear device, test procedure, and
1609 disaggregation used, the resulting strength envelope should be compared with at
1610 least one empirical correlation, e.g., Stark and Eid (1997), Mesri and Shahien
1611 (2003), or Wright (2005), to ensure the measured FSS envelope is reasonable.
- 1612 • FSS empirical correlations should be used to verify laboratory shear test data and
1613 can be used for planning level design. Empirical correlations should not be used
1614 for final design unless the correlation is “anchored” or calibrated with site specific
1615 testing as described herein.
- 1616 • Because of the potential for progressive failure, two stability scenarios should be
1617 considered: (1) use the FSS and exceed a two-dimensional factor of safety of for
1618 cut slopes and embankments 1.5 or 1.4 for levees and (2) use the residual strength
1619 and exceed a two-dimensional factor of safety of unity.

1620

1621

1622

1623

1624

1625 **10. Cited References**

- 1626 Abrams, T. G., and Wright, S. G. (1972). *A survey of earth slope failures and remedial*
1627 *measures in Texas*. Center for Transportation Research, University of Texas at
1628 Austin, 109.
- 1629 Akhtar, K. and Stark, T.D., "Importance of Side Resistance in 3D Stability Analysis,"
1630 *Proceedings of 12th International Conference on Geo-Disaster Reduction-ICGdR*,
1631 Fullerton, CA, September, 2014, pp. 110-118.
- 1632 Anayi, J. T., Boyce. J. R., and Rodgers. C. D. F. 1988, "Comparisons of Alternative
1633 Methods of Measuring the Residual Strength of a Clay." *Transportation Research*
1634 *Record* 1192, Transportation Research Board, Washington, DC. pp. 16-26.
- 1635 Anayi. J. T., Boyce. J. R., and Rodgers. C. D. F., 1989, "Modified Ring Shear
1636 Apparatus," *ASTM Geotechnical Testing Journal*. Vol. 12, No.2, pp. 171-173.
- 1637 Anderson. W. F. and Hammoud. F. 1988, "Effect of Testing Procedure in Ring Shear
1638 Tests." *ASTM Geotechnical Testing Journal*. Vol. 11. No.3, pp. 204-207.
- 1639 Anson, R.W.W. and Hawkins, A.B.. (1998). "The effect of calcium ions in pore water on
1640 the residual strength of kaolinite and sodium montmorillonite." *Geotechnique*, v.
1641 48(6):787-800.
- 1642 American Society for Testing and Materials (ASTM). (2008). "Standard test method for
1643 particle-size analysis of soils." (*D 422*) *2008 annual book of ASTM standards*, Vol.
1644 04.08, West Conshohocken, PA.
- 1645 American Society for Testing and Materials (ASTM). (2011). "Standard Test Method for
1646 Direct Shear Test of Soils Under Consolidated Drained Conditions." (*D3080*) *2008*
1647 *annual book of ASTM standards*, Vol. 04.08, West Conshohocken, PA.
- 1648 American Society for Testing and Materials (ASTM). (2008). "Standard test method for
1649 liquid limit, plastic limit, and plasticity index of soils." (*D 4318*) *2008 annual book*
1650 *of ASTM standards*, Vol. 04.08, West Conshohocken, PA.
- 1651 American Society for Testing and Materials (ASTM). (2008). "Standard test method for
1652 torsional ring shear test to determine drained fully softened shear strength and
1653 nonlinear strength envelope of cohesive soils (using normally consolidated
1654 specimen) for slopes with no pre-existing shear surfaces." (*D7608*) *2008 annual*
1655 *book of ASTM standards*, Vol. 04.08, West Conshohocken, PA.

- 1656 American Society for Testing and Materials (ASTM). (2011). "Standard Test Method for
1657 Direct Shear Test of Soils Under Consolidated Drained Conditions." (*D7181*) 2008
1658 *annual book of ASTM standards*, Vol. 04.08, West Conshohocken, PA.
- 1659 Atkinson, J. H., and Farrar, D. M. (1985). "Stress path tests to measure soil strength
1660 parameters for shallow landslips." *Proceedings of the 11th International Conference*
1661 *on Soil Mechanics and Foundation Engineering*, 4, 983–986.
- 1662 Bhattarai, P., Marui, H., Tiwari, B., Watanabe, N., and Tuladhar, G. R. (2006).
1663 "Influence of weathering on physical and mechanical properties of mudstone."
1664 *Proceedings of the International Symposium on Disaster Mitigation of Debris*
1665 *Flows, Slope Failures and Landslides*, 467–479.
- 1666 Bishop, A. W., Webb, D. L., and Lewin, P. I. (1965). "Undisturbed samples of London
1667 Clay from the Ashford Common Shaft: Strength–effective stress relationships."
1668 *Géotechnique*, 15(1), 1–31.
- 1669 Bishop, A. W., Green, G. E., Garaga, V. K., Andresen, A., and Brown, J. D. (1971). "A
1670 New Ring Shear Apparatus and its Application to the Measurement of Residual
1671 Strength." *Geotechnique*, Vol. 21. No.4. W·273-328.
- 1672 Branch, A., Stephens, I., Olsen, R., and Pearson, M. (2011). Lecture slides titled "Caution
1673 on Use of Non Site-Specific Fully Softened Shear Strength Correlations," presented
1674 at U.S. Army Corps of Engineers Infrastructure Systems Conference (ISC), Atlanta,
1675 GA, 41 pages.
- 1676 Bromhead, E. N. (1979). "A simple ring shear apparatus." *Ground Engineering*, 12(5),
1677 40–44.
- 1678 Bromhead, E. N. and Curtis, R. D. 1983, "A Comparison of Alternative Methods of
1679 Measuring the Residual Strength of London Clay," *Ground Engineering*. Vol. 16.
1680 pp. 39-41.
- 1681 CAGE (Colorado Association of Geotechnical Engineers), (1999). "Commentary on
1682 Geotechnical Practices: Drilled Pier Design Criteria for Lightly Loaded Structures in
1683 the Denver Metropolitan Area," 30 p.
- 1684 Cancelli, A. (1981). "Evolution of slopes in over-consolidated clays." *Proceedings of the*
1685 *10th International Conference on Soil Mechanics and Foundation Engineering*, 3,
1686 377–380.
- 1687 Castellanos, B.A., Brandon, T.L., VandenBerge, D.R. (2015). "Use of fully softened
1688 shear strength in slope stability analysis." *Journal of the International Consortium*
1689 *on Landslides*, Vol. 12, No. 3, pp. 1-13.

- 1690 Castellanos, B., Brandon, T. L., Stephens, I., and Walshire, L. (2013). "Measurement of
1691 fully softened shear strength." *Proceedings of Geo-Congress 2013: Stability and*
1692 *Performance of Slopes and Embankments III*, 234–244.
- 1693 Chandler, R. J. (1972). "Lias clay: Weathering process and their effect on shear strength."
1694 *Géotechnique*, 22(4), 403–431.
- 1695 Chandler, R. J. (1974). "Lias clay: The long-term stability of cutting slopes."
1696 *Géotechnique*, 24(1), 21–38.
- 1697 Charles, J. A., and Watts, K. S. (1980). "The influence of confining pressure on the shear
1698 strength of compacted rockfill." *Géotechnique*, 30(4), 353–367.
- 1699 Contreras, I. (2003). "Investigation and Stabilization of a Landslide on Pierre Shale."
1700 *Proc. 51st Annual Geotechnical Engineering Conf., University of Minnesota,*
1701 *Minneapolis, MN*, 1-21.
- 1702 Crabb, G. I., and Atkinson, J. H. (1991). "Determination of soil strength parameters for
1703 the analysis of highway slope failures." *Proceeding of the International Conference*
1704 *on Slope Stability Engineering*, 13–18.
- 1705 Day, R. W., and Axten, G. W. (1989). "Surficial stability of compacted clay slopes."
1706 *Journal of Geotechnical Engineering*, ASCE, 115(4), 577–580.
- 1707 De Mello, V. F. B. (1946). "Laboratory Investigation of Shearing Resistance of Clays."
1708 Thesis presented to the Massachusetts Institute of Technology in partial fulfillment
1709 of the requirements for the degree of Doctor of Philosophy, 262.
- 1710 De Mello, V. F. B. (1977). "Reflections on design decisions of practical significance to
1711 embankment dams." *Géotechnique*, 27(3), 281–355.
- 1712 Di Maio, C. (1996). "Exposure of bentonite to soil solution: Osmotic and mechanical
1713 effects." *Géotechnique*, 46(4), 695-707.
- 1714 Di Maio, C. and Fenilli, G.B.. (1994). "Residual strength of kaolin and bentonite: the
1715 influence of their constituent pore fluid." *Géotechnique*, 44(4):217-226.
- 1716 Di Maio, C. and Oronati, R. (2000). "Influence of pore liquid composition on the shear
1717 strength of active clay." In: Bromhead, E., N. Dixon and M.L. Ibsen (eds),
1718 *Proceedings of the 8th International Symposium on Landslides*, Cardiff, 1: 463-468.
- 1719 Duncan, J.M., Wright, S.G., and Brandon, T.L., *Soil Strength and Slope Stability*, 2nd
1720 Ed., John Wiley and Sons, 2015, 317 p.

- 1721 Duncan, J. M., Brandon, T. L., and VandenBerge, D. R. (2011). *Report of the workshop*
 1722 *on shear strength for stability of slopes in highly plastic clays*. Center for
 1723 Geotechnical Practice and Research, Blacksburg, VA, 79 p.
- 1724 Duncan, J.M. and Wright, S.G. (2005). *Soil Strength and Slope Stability*, 1st Ed., John
 1725 Wiley and Sons, 2015, 297 p.
- 1726 Duncan, J.M., Wright, S.G., and Brandon, T.L. (2015). *Soil Strength and Slope Stability*,
 1727 2nd Ed., John Wiley and Sons, 2015, 317 p.
- 1728 Duncan, J.M. and Chang, C.Y. (1970). “Nonlinear Analysis of Stress and Strain in
 1729 Soils.” *ASCE Journal of the Soil Mechanics and Foundations Division*, September.
 1730 1970, 96(SM5), pp. 1629-1653.
- 1731 Duncan, J. M., Brandon, T. L., and VandenBerge, D. R. (2011). *Report of the workshop*
 1732 *on shear strength for stability of slopes in highly plastic clays*. Center for
 1733 Geotechnical Practice and Research, Blacksburg, 79.
- 1734 Gamez, J. and Stark, T.D. (2014). “Fully Softened Shear Strength at Low Stresses for
 1735 Levee and Embankment Design.” *ASCE Journal of Geotechnical and*
 1736 *Geoenvironmental Engineering*, June. 2014, pp. 06014010-1-06014010-6.
- 1737 Gibson, R. E. (1953). “Experimental determination of the true cohesion and true angle of
 1738 internal friction in clays.” *Proceedings of the 3rd International Conference in Soil*
 1739 *Mechanics*, 1, 126–130.
- 1740 Gibo, S., Egashira, K., Ohtsubo, M., and Nakamura, S. (2002). “Strength recovery from
 1741 residual state in reactivated landslides.” *Geotechnique*, 52(9), 683–686.
- 1742 Gourlay, A. W., and Wright, S. G. (1984). *Initial laboratory study of the shear strength*
 1743 *properties of compacted, highly plastic clays used for highway embankment*
 1744 *construction in the area of Houston, Texas*. Center for Transportation Research,
 1745 University of Texas at Austin, 224.
- 1746 Green, R., and Wright, S. G. (1986). *Factors affecting the long term strength of*
 1747 *compacted Beaumont Clay*. Center for Transportation Research, University of Texas
 1748 at Austin, 222.
- 1749 Henkel, D.J. (1957). “Investigations of two long-term failures in London Clay slopes at
 1750 Wood Green and Northolt.” *Proceedings of the fourth International Conference on*
 1751 *Soil Mechanics and Foundation Engineering*, London, Vol. 2, pp. 315-320.
- 1752 Hvorslev, M. J. (1936). “A ring shear apparatus for the determination of the shearing
 1753 resistance and plastic flow of soils.” *Proceedings of the 1st International Conference*
 1754 *on Soil Mechanics and Foundation Engineering*, 2, 125–129.

- 1755 Hvorslev, M. J. (1939). "Torsion shear tests and their place in the determination of the
1756 shearing resistance of soils." *Proceedings of the American Society Testing Material*,
1757 39, 999–1022.
- 1758 Hvorslev, M. J. (1960). "Physical components of the shear strength of saturated clays."
1759 *Research Conference on Shear Strength of Cohesive Soils*, Boulder, Colorado, 169–
1760 273.
- 1761 Hvorslev, M. J. (1969). *Physical Properties of Remolded Cohesive Soils. Translation 69-*
1762 *5*, U.S. Army Engineer Waterways Experiment Station, Vicksburg, 165.
- 1763 James, P. M. (1970). "Time Effects and Progressive Failure in Clay Slopes." Thesis
1764 presented to University of London in partial fulfillment of the requirements for the
1765 degree of Doctor of Philosophy, 210 pp.
- 1766 Kayyal, M.K. and Wright, S.G. (1991). "Investigation of Long-Term Strength Properties
1767 of Paris and Beaumont Clays in Earth Embankments," Research Project No. CTR 3-
1768 8-89/1-1195-2F, Center for Transportation Research, University of Texas, Austin,
1769 TX, Research Report 1195-2F, 123 pp.
- 1770 Kovacevic, N., Potts, D. M., and Vaughan, P. R. (2001). "Progressive failure in clay
1771 embankments due to seasonal climate changes." *Proc. 15th Int. Conf. Soil Mech.*
1772 *Geotech. Eng.*, 3, 2127–2130.
- 1773 Lade, P. V. (2010). "The mechanics of surficial failure in soil slopes." *J. Eng. Geo.*,
1774 ASCE, 114(1-2), 57–64.
- 1775 La Gatta, D. P., 1970, "Residual Strength of Clays and Clay-Shales by Rotation Shear
1776 Tests," Ph.D. thesis reprinted as *Harvard Soil Mechanics Series* No. 86, Harvard
1777 University. Cambridge. MA, p. 204.
- 1778 Lupini, J. F., Skinner, A. E., and Vaughan, P. R. (1981). "The drained residual strength
1779 of cohesive soils." *Geotechnique*, 31(2), 181-213.
- 1780 Maccarini, M. (1993). "A comparison of direct shear box tests with triaxial compression
1781 tests for a residual soil." *Geotechnical and Geological Engineering*, 11(2), 69–80.
- 1782 Maksimovic, M. (1989). "Nonlinear failure envelope for soils." *Journal of Geotechnical*
1783 *Engineering*, 115(4), 581–586.
- 1784 McCook, D. (1999). "Surficial Slides on Highly Plastic Clay Embankments," ASDSO
1785 Annual Meeting, St. Louis, MO. August, 1999. Voted one of best of conference
1786 papers.
- 1787 McCook, D. (2007). Lecture on Slope Stability presented at FEMA Seminar "Pitfalls
1788 with Embankments", Emmitsburg, MD, February, 2007.

- 1789 McCook, D. (2012). "Modeling for Surficial Slope Failures," Paper accepted for
1790 presentation at 2012 USSD Annual Meeting.
- 1791 McCook, D. K. (2012). "Discussion of Modeling for Analyses of Fully Softened
1792 Levees." *Innov. Dam and Levee Design and Const. for Sustain. Water Mngmt.*, New
1793 Orleans, 483–523.
- 1794 McGuire, M.P. and Sleep, M.D. (2015). "Stability of embankment slopes with time-
1795 dependent strength." *28th Central Pennsylvania Geotechnical Conference*, Hershey,
1796 Pennsylvania.
- 1797 Mesri, G., and Cepeda-Diaz, F. (1986). "Residual shear strength of clays and shales."
1798 *Géotechnique*, 36(2), 269–274.
- 1799 Mesri, G., and Abdel-Ghaffar, M. E. M. (1993). "Cohesion intercept in effective stress-
1800 stability analysis." *Journal of Geotechnical Engineering*, ASCE, 119(8), 1229–
1801 1249.
- 1802 Mesri, G., and Shahien, M. (2003). "Residual shear strength mobilized in first-time slope
1803 failures." *J. Geotech. Geoenviron. Eng.*, 129(1), 12–31.
- 1804 Moon, A. T. (1984). "Effective shear strength parameters for stiff fissured clays." *4th*
1805 *Australia-New Zealand Conference on Geomechanics*, 107–111.
- 1806 Moore, R. (1991). "The chemical and mineralogic controls upon the residual strength of
1807 pure and natural clays." *Géotechnique*, 41(1):35-47.
- 1808 Morgenstern, N.R. and Price, V. E. (1965). "The analysis of the stability of of general slip
1809 surfaces." *Geotechnique*, 15(1), 79-93.
- 1810 Noor, M. J. M., and Anderson, W. F. (2006). "A comprehensive shear strength model for
1811 saturated and unsaturated soils." *Unsaturated Soils 2006 (GSP 147)*, ASCE, 1993–
1812 2003.
- 1813 Rogers, L. E., and Wright, S. G. (1986). *The effects of wetting and drying on the long-*
1814 *term shear strength parameters for compacted Beaumont Clay*. Center for
1815 Transportation Research, University of Texas at Austin, 146.
- 1816 Saleh, A.A. and Wright, S. G. (1997). *Shear Strength Correlations and Remedial*
1817 *Measure Guidelines for Long-Term Stability of Slopes Constructed of Highly Plastic*
1818 *Clay Soils*. Center for Transportation Research, U. of Texas at Austin, 156 p.
- 1819 Sassa, K. (1992). "Access to the dynamics of landslides during earthquakes by a new
1820 cyclic loading ring shear apparatus," *Proceedings of the 6th International*
1821 *Symposium on Landslides*, 3, Balkema, 1919-1937, 1992.

- 1822 Schaefer, V. R. and Lohnes, R. A. 2001. "Landslide failure mechanisms in Pierre shale,
1823 South Dakota, U.S.A." *Proceedings of the International Conference on Landslides:
1824 Causes, Impacts and Countermeasures*, Davos, Switzerland, pp. Verlag Gluckauf
1825 Essen, pp. 87-96.
1826
- 1827 Sembenelli, P. and Ramirez, AL. "Measurement of residual strength of clay with a
1828 rotating shear machine," *Proceedings of the 7th International Conference on Soil
1829 Mechanics*, Mexico, 3, 528-529, 1969.
1830
- 1831 Skempton, A. (1954). "The pore-pressure coefficients A and B." *Geotechnique*, 4,
1832 143-147.
1833
- 1834 Skempton, A.W. (1964). "Long-Term Stability of Clay Slopes." *Geotechnique*, 14(2), 77-
1835 102.
- 1836 Skempton, A. W. (1977). "Slope stability of cuttings in Brown London Clay." *Proc. 9th
1837 Int. Conf. Soil Mech. Found. Eng.*, 3, 261-270.
- 1838 Skempton, A.W. (1985), "Residual Strength of Clays in Landslides, Folded Strata, and the
1839 Laboratory," *Geotechnique*, Vol. 35, No. 1, pp. 3-18.
- 1840 Skempton, A.W. and Petley, D.J. (1967), "The Strength of Structural Discontinuities in
1841 Stiff Clay," *Proceedings of the Geotechnical Conference*, Oslo, Vol. 2, pp. 29-46.
- 1842 Spencer, E. (1967). "A method of analysis of the stability of embankments assuming
1843 parallel interslice forces." *Geotechnique*, 17(1), 11-26.
- 1844 Stark, T. D., Choi, H., and McCone, S. (2005). "Drained shear strength parameters for
1845 analysis of landslides." *Journal of Geotechnical and Geoenvironmental
1846 Engineering*, 131(5), 575-588.
- 1847 Stark, T. D. (1987). Mechanism of strength loss in stiff clays. Ph.D. dissertation.
1848 Virginia Polytechnic Institute and State University, Blacksburg, VA
- 1849 Stark, T. D. and Duncan, J. M. (1991). Mechanism of strength loss in stiff clays.
1850 *Journal of Geotechnical Engineering*, ASCE, 117(1): 139 - 154.
- 1851 Stark, T.D. and Eid, H.T. (1997). "Slope Stability Analyses in Stiff Fissured Clays,"
1852 *Journal of Geotechnical and Geoenvironmental Engineering*, ASCE, Vol. 123, No.
1853 4, April, 1997, pp. 335-343.
- 1854 Stark, T.D., Choi, H., and McCone, S. (2005). "Shear Strengths for Analysis of
1855 Landslides," *Journal of Geotechnical and Geoenvironmental Engineering*, ASCE,
1856 Vol. 131, No. 5, May, 2005, pp. 575-588.

- 1857 Stark, T.D. and Hussain, M. (2013). "Drained Shear Strength Correlations for Slope
1858 Stability Analyses," *J. of Geotechnical Engineering*, ASCE, 139(6), June, 2013, pp.
1859 853-862.
- 1860 Stark, T.D. and Poeppel, A.R. (1994). "Landfill Liner Interface Strengths from Torsional
1861 Ring Shear Tests," *Journal of Geotechnical Engineering*, ASCE, Vol. 120, No. 3,
1862 March, pp. 597-615.
- 1863 Stark, T.D. O'Donnell, D.P., and Lopez, S. (2015). "Use of Fully Softened Strength
1864 Correlations for Design." UNDER REVIEW BY *Geotechnique*, November. 2015,
1865 30 p.
- 1866 Stauffer, P. A., and Wright, S. G. (1984). *An examination of earth slope failures in Texas*.
1867 Center for Transportation Research, University of Texas at Austin, Austin, TX, 273.
- 1868 Steward, H.E. and Cripps, J.C. (1983). "Some engineering implications of chemical
1869 weathering of pyretic shale." *Quarterly Jour. Engng. Geology*, v.16:281-289.
- 1870 Terzaghi, K. (1936). "Stability of slopes of natural clay." *Proceedings of the 1st*
1871 *International Conf. on Soil Mechanics and Foundation Engineering*, 1, 161–165.
- 1872 Thomson, S., and Kjartanson, B. H. (1985). "Study of delayed failure in a cut slope in
1873 stiff clay." *Can. Geotech. J.*, 22(2), 286–297.
- 1874 Tiedemann, B. (1937). "Über die Schubfestigkeit bindiger Boden." *Bautechnik*, 15(30
1875 and 33), 400 – 403 and 433 – 435.
- 1876 Tiwari, B., and Ajmera, B. (2011). "A new correlation relating the shear strength of
1877 reconstituted soil to the proportions of clay minerals and plasticity characteristics."
1878 *Applied Clay Science*, Elsevier B.V., 53(1), 48-57.
- 1879 Tiwari, B. and Ajmera, B. (2014). "Reduction in Fully Softened Shear Strength of
1880 Natural Clays with NaCl Leaching and Its Effect of Slope Stability." *Journal of*
1881 *Geotechnical and Geoenvironmental Engineering*, 04014086-1– 04014086-10.
- 1882 Tiwari, B. and Marui, H. (2005). "A new method for the correlation of residual shear
1883 strength of soil with mineralogical composition." *Journal of Geotechnical and*
1884 *Geoenvironmental Engineering*, 131 (9), 1139-1150.
1885
- 1886 Tiwari, B., Tuladhar, G.R., and Marui, H. (2005). "Variation in residual shear strength of
1887 the soil with salinity of pore fluid." *J. Geotech. Geoenviron. Eng.*, ASCE, 131:12,
1888 1445-1456.
1889
- 1890 USACE (1983) Long-term reduction and slough slides in Mississippi river levees,
1891 Waterways Experiment Station, Vicksburg, MS.

- 1892 VandenBerge, D. R., Duncan, J. M., and Brandon, T. L. (2013). "Fully softened strength
1893 of natural and compacted clays for slope stability." *Proceedings of Geo-Congress*
1894 *2013: Stability and Performance of Slopes and Embankments III*, 221–233.
- 1895 VandenBerge, D. R., Duncan, J. M., and Brandon, T. L. (2015). "Undrained Strength of
1896 Compacted Clay under Principal Stress Reorientation." *ASCE Journal of*
1897 *Geotechnical and Geoenvironmental Engineering*, August. 2015, pp. 04015035-1-
1898 04015035-11.
- 1899 Vaughan, P. R., and Walbancke, H. J. (1973). "Pore pressure changes and the delayed
1900 failure of cutting slopes in overconsolidated clay." *Géotechnique*, 23(4), 531–539.
- 1901 VonThun, J. L. (1985). San Luis dam upstream slide. *In proceedings of the eleventh*
1902 *international conference on soil mechanics and foundation engineering*, San
1903 Francisco, 12 – 16 August, pp. 2593 – 2598.
- 1904 Wright, S. G. (2005). *Evaluation of soil shear strengths for slope and retaining wall*
1905 *stability analyses with emphasis on high plasticity clays*. Center for Transportation
1906 Research, University of Texas at Austin, 100.
- 1907 Wright, S. G., Zornberg, J. G., and Aguetant, J. E. (2007). "The fully softened shear
1908 strength of high plasticity clays." Center for Transportation Research, University of
1909 Texas at Austin, 132.
- 1910
1911
1912

1913

1914 **11. Additional/Uncited References**

1915 (a) Measurement

1916 - ASTM test methods

1917 - Other test methods

1918 - Journal of Geotechnical Testing articles

1919 - Other Papers/Sources

1920 (b) FSS in overconsolidated clays

1921 -

1922 (c) FSS in compacted clays

1923 -

1924 (d) Drained strength v. undrained strength

1925 -

1926 (e) FSS at low effective normal stresses

1927 -

1928 (f) Empirical correlations for slope stability analyses

1929 -

1930 (g) Other possible topics

1931 -

1932

1933

1934 **12. Uncited References**

1935 (a) Measurement

1936

1937 American Society for Testing and Materials (ASTM). (2008). "Standard test method

1938 for particle-size analysis of soils." (*D 422*) *2008 annual book of ASTM standards*,

1939 Vol. 04.08, West Conshohocken, Pa.

1940

- 1941 American Society for Testing and Materials (ASTM). (2011). “Standard Test Method for
 1942 Direct Shear Test of Soils Under Consolidated Drained Conditions.” (*D3080*) 2008
 1943 *annual book of ASTM standards*, Vol. 04.08, West Conshohocken, Pa.
- 1944 American Society for Testing and Materials (ASTM). (2008). “Standard test method
 1945 for liquid limit, plastic limit, and plasticity index of soils.” (*D 4318*) 2008 *annual*
 1946 *book of ASTM standards*, Vol. 04.08, West Conshohocken, Pa.
- 1947 American Society for Testing and Materials (ASTM). (2008). “Standard test method
 1948 for torsional ring shear test to determine drained fully softened shear strength
 1949 and nonlinear strength envelope of cohesive soils (using normally
 1950 consolidated specimen) for slopes with no preexisting shear surfaces.”
 1951 (*D7608*) 2008 *annual book of ASTM standards*, Vol. 04.08, West Conshohocken,
 1952 Pa.
- 1953 American Society for Testing and Materials (ASTM). (2011). “Standard Test Method for
 1954 Direct Shear Test of Soils Under Consolidated Drained Conditions.” (*D7181*) 2008
 1955 *annual book of ASTM standards*, Vol. 04.08, West Conshohocken, Pa.
- 1956
 1957
 1958
- 1959 **(b) FSS in overconsolidated clays**
- 1960 Skempton, A. W. (1970). “First-time slides in over-consolidated clays.” *Geotechnique*,
 1961 20(3), 320–324.
- 1962 **(c) FSS in compacted clays**
- 1963 Green, R., and Wright, S. G. (1986). “Factors affecting the long term strength of
 1964 compacted Beaumont clay.” Center for Transportation Research, University of
 1965 Texas at Austin.
- 1966 Rogers, L. E., and Wright, S. G. (1986). “The effects of wetting and drying on the long-
 1967 term shear strength parameters for compacted Beaumont clay.” Center for
 1968 Transportation Research, University of Texas at Austin, 146

1969 **(d) Drained strength v. undrained strength**

- 1970 Borden, R. H., and Putrich, S. F. (1986). "Drained-strength parameters from direct shear
1971 tests for slope stability analyses in overconsolidated fissured residual soils."
1972 *Transportation Research Record*, N1089, 102-113.
1973 Stark, T. D. (1995). "Measurement of drained residual strength of overconsolidated
1974 clays." *Transportation Research Record*, 1479, 26–34.conso
- 1975 Stark, T. D., Choi, H., and McCone, S. (2005). "Drained shear strength parameters for
1976 analysis of landslides." *Journal of Geotechnical and Geoenvironmental*
1977 *Engineering*, 131(5), 575-588.
- 1978 Stark, T. D., Choi, H., and McCone, S. (2005). "Drained shear strength parameters for
1979 analysis of landslides," *Journal of Geotechnical and Geoenvironmental*
1980 *Engineering*, Vol. 131, No. 5, May, 575-588.
- 1981 Dewoolkar, M. M., and Huzjak, R. J. (2005). "Drained residual shear strength of some
1982 claystones from Front Range, Colorado." *Journal of Geotechnical and*
1983 *Geoenvironmental Engineering*, 131(12), 1543-1551.
- 1984 Eid, H. T. (1996). "Drained shear strength of stiff clays for slope stability analyses."
1985 PhD Dissertation. University of Illinois.
- 1986 Kamei, T. (1987). "Some drained tests on normally consolidated cohesive soils."
1987 <http://ir.nagaokaut.ac.jp/dspace/bitstream/10649/397/1/K9_9.pdf>
1988 (May. 12, 2011).
- 1989 Kanji, M. A. (1974). "The relationship between drained friction angles and Atterberg
1990 limits of natural soils." *Géotechnique*, 24(4), 671–674.
- 1991 Lupini, J. F., Skinner, A. E., and Vaughan, P. R. (1981). "The drained residual strength
1992 of cohesive soils." *Géotechnique*, 31(2), 181-213.
- 1993 Stark, T. D., Choi, H., and McCone, S. (2005). "Drained shear strength parameters for
1994 analysis of landslides." *Journal of Geotechnical and Geoenvironmental*
1995 *Engineering*, 131(5), 575-588.
- 1996 Stark, T. D., and Eid, H. T. (1994). "Drained residual strength of cohesive soils."
1997 *Journal of Geotechnical Engineering*, 120(5), 856–871.
1998

1999 **(e) FSS at low effective normal stresses**

- 2000 Pedersen, R. C., Olson, R. E., and Rauch, A. F. (2003). "Shear and interface
2001 strength of clay at very low effective stress," *Geotechnical Testing Journal*,
2002 March, Vol. 26, No. 1, 8 pp.
2003

2004 **(f) Empirical correlations for slope stability analyses**

- 2005 Aubeny, C. P., and Lytton, R. L. (2004). "Shallow slides in compacted high plasticity
2006 clay slopes." *Journal of Geotechnical and Geoenvironmental Engineering*,
2007 130(7), 717–727.

- 2008 Bjerrum, L. (1967). "Progressive failure in slopes of overconsolidated plastic clay
2009 and clay shales." *Journal of Soil Mechanics and Foundations Division*, 93(SM5),
2010 3-49.
- 2011 Day, R. W. (1992a). "Swell versus saturation for compacted clay." *Journal of*
2012 *Geotechnical Engineering*, 118(8), 1272-1278.
- 2013 Day, R. W. (1996a). "Design and repair for surficial slope failures." *Practice*
2014 *Periodical on Structural Design and Construction*, 1(3), 83-87.
- 2015 Cancelli, A. (1977). "Residual shear strength and stability analysis of a landslide in
2016 fissured overconsolidated clays." *Bulletin of the International Association of*
2017 *Engineering Geology*, 16, 193-197.
- 2018 Charles, J. A., and Soares, M. M. (1984). "Stability of compacted rockfill slopes."
2019 *Geotechnique*, 34(1), 61-70.
- 2020 Day, R. W. (1994b). "Surficial stability of compacted clay: Case study." *Journal of*
2021 *Geotechnical Engineering*, 120(11), 1980-1990.
- 2022 Day, R. W., and Axten, G. W. (1989a). "Surficial stability of compacted clay slopes."
2023 *Journal of Geotechnical Engineering*, 115(4), 577.
- 2024 Chandler, R. J., and Skempton, A. W. (1974). "The design of permanent cutting
2025 slopes in stiff fissured clays." *Géotechnique*, 24(4), 457-466.
- 2026 Day, R. W., and Axten, G. W. (1990). "Softening of fill slopes due to moisture
2027 infiltration." *Journal of Geotechnical Engineering*, 116(9), 1424-1427.
- 2028 Henkel, D. J. (1957). "Investigations of two long-term failures in London clay slopes
2029 at Wood Green and Northolt." *Proceedings of the 4th International*
2030 *Conference in Soil Mechanics*, 2, 315-320.
- 2031 Lade, P. V. (2010). "The mechanics of surficial failure in soil slopes." *Engineering*
2032 *Geology*, Elsevier, 114(1-2), 57-64.
- 2033 Putrich, S. F., Borden, R. H., and Lambe, P. C. (1986). "Analysis of slope failure in
2034 overconsolidated fissured residual soils: A case study." *Transportation*
2035 *Research Record*, (1089), 114-123.
- 2036 Vaughan, P. R., and Walbancke, H. J. (1973). "Pore pressure changes and the
2037 delayed failure of cutting slopes in overconsolidated clay." *Géotechnique*,
2038 23(4), 531-539.
- 2039 Skempton, A. W. (1964). "Long-term stability of clay slopes." *Géotechnique*, 14(2),
2040 77-102.
- 2041 Skempton, A. W. (1977). "Slope stability of cuttings in brown London clay."
2042 *Proceedings of the 9th International Conference on Soil Mechanics and*
2043 *Foundation Engineering*, 3, 261-270.
- 2044 Stauffer, P. A., and Wright, S. G. (1984). "An examination of earth slope failures in
2045 Texas," Center for Transportation Research, University of Texas at Austin.
- 2046 Terzaghi, K. (1936). "Stability of slopes of natural clay." *Proceedings of the 1st*
2047 *International Conference of Soil Mechanics and Foundations*, 161-165.

- 2048 USACE (2003). "Slope stability, Engineer Manual 1110-2-1906," U.S. Army Corps
2049 of Engineers, Washington, D.C.
- 2050 Collins, I. F., Gunn, C. I. M., Pender, M. J., and Wang, Y. (1988). "Slope stability
2051 analyses for materials with a nonlinear failure envelope." *International*
2052 *Journal for Numerical and Analytical Methods in Geomechanics.*, 12(5), 533–
2053 550.
- 2054 Crabb, G. I., and Atkinson, J.H. (1988). "Determination of soil strength parameters
2055 for the analysis of highway slope failures," *Slope Stability Engineering –*
2056 *Developments and Applications, Proceedings of the international conference*
2057 *on slope stability, Institution of Civil Engineers, 1991.*
- 2058 Lade, P. V. (2010). The mechanics of surficial failure in soil slopes," *Engineering*
2059 *Geology*, 114, 57-64.
- 2060 Perry, J. (1994). "A technique for defining non-linear shear strength envelopes and
2061 their incorporation in a slope stability method of analysis." *Quarterly Journal*
2062 *of Engineering Geology*, 27(3), 231–241.
- 2063 Abrams, T. G., and Wright, S. G. (1972). *A survey of earth slope failures and remedial*
2064 *measures in Texas.* Center for Transportation Research, University of Texas at
2065 Austin, 109.
- 2066 Bhattarai, P., Marui, H., Tiwari, B., Watanabe, N., and Tuladhar, G. R. (2006). "Influence
2067 of weathering on physical and mechanical properties of mudstone." *Proceedings*
2068 *of the International Symposium on Disaster Mitigation of Debris Flows, Slope*
2069 *Failures and Landslides*, 467-479.
- 2070 Cancelli, A. (1981). "Evolution of slopes in over-consolidated clays." *Proceedings of the*
2071 *10th International Conference on Soil Mechanics and Foundations Engineering*, 3,
2072 377–380.
- 2073 Chandler, R. J. (1974). "Lias Clay: The long-term stability of cutting slopes."
2074 *Géotechnique*, 24(1), 21–38.
- 2075 Chandler, R. J. (1976). "The history and stability of two Lias Clay slopes in the Upper
2076 Gwash Valley, Rutland [and discussion]." *Philosophical Transactions of the Royal*
2077 *Society of London. Series A, Mathematical and Physical Sciences*, 283(1315), 463–
2078 491
- 2079 Chandler, R. J., and Skempton, A. W. (1974). "The design of permanent cutting slopes in
2080 stiff fissured clays." *Géotechnique*, 24(4), 457-466.
- 2081 Charles, J. A., and Bromhead, E. N. (2008). "Contributions to Géotechnique 1948–2008:
2082 Slope stability and embankment dams." *Géotechnique*, 58(5), 385-389.
- 2083 Charles, J. A., and Soares, M. M. (1984). "The stability of slopes in soils with nonlinear
2084 failure envelopes." *Canadian Geotechnical Journal*, 21(3), 397-406.
- 2085 Chin, T. Y., and Sew, G. S. (2001). "The determination of shear strength in residual soils
2086 for slope stability analysis." *Seminar Cerun Kebangsaan 2001, Cameron*
2087 *Highlands.*
- 2088 Ching-Chuan, H., Yih-Jang, J., Lih-Kang, H., and Jin-Long, L. (2009). "Internal soil
2089 moisture and piezometric responses to rainfall-induced shallow slope failures."
2090 *Journal of Hydrology*, Elsevier B.V., 370(1-4), 39-51.

2091 Cho, S. E., and Lee, S. R. (2002). "Evaluation of surficial stability for homogeneous
2092 slopes considering rainfall characteristics." *Journal of Geotechnical and*
2093 *Geoenvironmental Engineering*, 128(9), 756-763.

2094 Day, R. W. (1993). "Surficial slope failure: A case study." *Journal of performance of*
2095 *constructed facilities*, 7(4), 264-269.

2096 DDay, R. W., and Axten, G. W. (1990). "Softening of fill slopes due to moisture
2097 infiltration." *Journal of Geotechnical Engineering*, 116(9), 1424-1427.

2098 Duncan, J. M., and Dunlop, P. (1969). "Slopes in stiff-fissured clays and shales." *Journal*
2099 *of Soil Mechanics and Foundations Division*, 95(SM2), 467-491.

2100 Dunlop, P., and Duncan, J. M. (1970). "Development of failure around excavated slopes."
2101 *Journal of the Soil Mechanics and Foundations Division*, 96(2), 471-493.

2102 Early, K. R., and Skempton, A. W. (1972). "Investigations of the landslide at Walton's
2103 Wood, Staffordshire." *Quarterly Journal of Engineering Geology*, 5(1-2), 19-41.

2104 Eigenbrod, K. D. (1975). "Analysis of the pore pressure changes following the
2105 excavation of a slope." *Canadian Geotechnical Journal*, 12, 429-440.

2106 Esu, F. (1966). "Short-term stability of slopes in unweathered jointed clays."
2107 *Géotechnique*, 16(4), 321-328.

2108 Fourie, A. B. (1996). "Predicting rainfall-induced slope instability." *Proceedings of*
2109 *Institution of Civil Engineers, Geotechnical Engineering*, 119, 211-218.

2110 Henkel, D. J. (1957). "Investigations of two long-term failures in London Clay slopes at
2111 Wood Green and Northolt." *Proceedings of the 4th International Conference on*
2112 *Soil Mechanics and Foundation Engineering*, 2, 315-320.

2113 James, P. M. (1970). "Time effects and progressive failure in clay slopes." PhD Thesis,
2114 University of London.

2115 Kassiff, G., and Alpan, I. (1973). "A slope failure in swelling clay." *Canadian Geotechnical*
2116 *Journal*, 10(3), 531-536.

2117 Kenney, T. C., and Uddin, S. (1974). "Critical period for stability of an excavated slope in
2118 clay soil." *Canadian Geotechnical Journal*, 11, 620-623.

2119 Lade, P. V. (2010). "The mechanics of surficial failure in soil slopes." *Engineering*
2120 *Geology*, Elsevier, 114(1-2), 57-64.

2121 Lambe, P. C., Silva, F., Marr, W. A., and Lambe, T. W. (1989). "Instability of natural
2122 slopes in Puerto Rico." *Proceedings of the 12th International Conference on Soil*
2123 *Mechanics and Foundation Engineering*, Rio de Janeiro, 13-18.

2124 Ling, H. I., Wu, M. H., Leshchinsky, D., and Leshchinsky, B. (2009). "Centrifuge modeling
2125 of slope instability." *Journal of Geotechnical and Geoenvironmental Engineering*,
2126 135(6), 758-767.

2127 Lo, K. Y., and Lee, C. F. (1973). "Stress analysis and slope stability in strain-softening
2128 materials." *Géotechnique*, 23(1), 1-11.

2129 McGown, A., Saldivar-Sali, A., and Radwan, A. M. (1974). "Fissure patterns and slope
2130 failures in till at Hurlford, Ayrshire." *Quarterly Journal of Engineering Geology*,
2131 7(1), 1-26.

2132 esri, G., and Shahien, M. (2003). "Residual shear strength mobilized in first-time slope
2133 failures." *Journal of Geotechnical and Geoenvironmental Engineering*, 129(1), 12-
2134 31.

2135 Mitchell, R. J. (1975). "Strength parameters for permanent slopes in Champlain Sea
2136 clays." *Canadian Geotechnical Journal*, 12(4), 447-455.

2137 Morgenstern, N. R. (1977). "Slopes and excavations in heavily over-consolidated clays."
2138 *Proceedings of the 9th International Conference on Soil Mechanics and*
2139 *Foundation Engineering, Tokyo, State of t, 567-581.*

2140 Noor, M. J. M., and Hadi, B. A. (2010). "The role of curved-surface envelope Mohr-
2141 Coulomb model in governing shallow infiltration induced slope failure."
2142 *Electronic Journal of Geotechnical Engineering, 15.*

2143 Peck, R. B. (1967). "Stability of natural slopes." *Journal of Soil Mechanics and*
2144 *Foundations Division, 93(SM4), 403-417.*

2145 Picarelli, L., Urciuoli, G., Mandolini, A., and Ramondini, M. (2006). "Softening and
2146 instability of natural slopes in highly fissured plastic clay shales." *Natural*
2147 *Hazards and Earth System Sciences, 6(1985), 529-539.*

2148 otts, D. M., Kovacevic, N., and Vaughan, P. R. (1997). "Delayed collapse of cut slopes in
2149 stiff clay." *Géotechnique, 47(5), 953-982.*

2150 Pradel, D., and Raad, G. (1993a). "Effect of permeability on surficial stability of
2151 homogeneous slopes." *Journal of Geotechnical Engineering, 119(2), 315-332.*

2152 Quigley, R. M., Matich, M., Horvath, R. G., and Hawson, H. H. (1971). "Swelling clay in
2153 two slope failures at Toronto, Canada." *Canadian Geotechnical Journal, 8(3),*
2154 *417-424.*

2155 Reid, M. E., Nielsen, H. P., and Dreiss, S. J. (1988). "Hydrologic factors triggering a
2156 shallow hillslope failure." *Bulletin of the Association of Engineering Geologists,*
2157 *25(3), 349-361.*

2158 Saleh, A. A., and Wright, S. G. (1997). *Shear strength correlations and remedial measure*
2159 *guidelines for long-term stability of slopes constructed of highly plastic clay soils.*
2160 Center for Transportation Research, The University of Texas at Austin, 154.

2161 Skempton, A. W. (1964). "Long-term stability of clay slopes." *Géotechnique, 14(2), 77-*
2162 *102.*

2163 Skempton, A. W. (1969). "General report on stability of natural slopes and
2164 embankment foundations." *Proceedings of the 7th International Conference on*
2165 *Soil Mechanics and Foundation Engineering, 3, 151-155*

2166 Skempton, A. W. (1977). "Slope stability of cuttings in Brown London Clay."
2167 *Proceedings of the 9th International Conference on Soil Mechanics and*
2168 *Foundation Engineering, 3, 261-270.*

2169 Skempton, A. W., and DeLory, F. A. (1957). "Stability of natural slopes in London Clay."
2170 *Proceedings of the 4th International Conference on Soil Mechanics and*
2171 *Foundations Engineering, 2, 378-381.*

2172 Skempton, A. W., and Hutchinson, J. N. (1969a). "Stability of natural slopes and
2173 embankment foundations." *Proceedings of the 7th International Conference on*
2174 *Soil Mechanics and Foundation Engineering, 4(State of the Art), 291-340.*

2175 Skempton, A. W., and Hutchinson, J. N. (1969b). "Discussion of stability of natural
2176 slopes and embankment foundations." *Proceedings of the 7th International*
2177 *Conference on Soil Mechanics and Foundation Engineering, 3, 377-414.*

2178 Stark, T. D., and Eid, H. T. (1992). "Comparison of field and laboratory residual
2179 strengths." *Stability and Performance of Slopes and Embankments II Proceedings,*
2180 *876-889.*

2181 soils." *Journal of Geotechnical Engineering, 121(9), 670-673.*

- 2182 Stark, T. D., and Eid, H. T. (1997). "Slope stability analyses in stiff fissured clays."
 2183 *Journal of Geotechnical and Geoenvironmental Engineering*, 123(4), 335-343.
- 2184 Stauffer, P. A., and Wright, S. G. (1984). *An examination of earth slope failures in Texas*.
 2185 Center for Transportation Research, University of Texas at Austin, 273.
- 2186 Terzaghi, K. (1936). "Stability of slopes of natural clay." *Proceedings of the 1st*
 2187 *International Conference on Soil Mechanics and Foundation Engineering*, 1, 161-
 2188 165.
- 2189 Thomson, S., and Kjartanson, B. H. (1985). "Study of delayed failure in a cut slope in
 2190 stiff clay." *Canadian Geotechnical Journal*, 22(2), 286-297.
- 2191 Tohari, A., Nishigaki, M., and Komatsu, M. (2007). "Laboratory rainfall-induced slope
 2192 failure with moisture content measurement." *Journal of Geotechnical and*
 2193 *Geoenvironmental Engineering*, 133(5), 575-587.
- 2194 Turnbull, W. J., and Hvorslev, M. J. (1967). "Special problems in slope stability." *Journal*
 2195 *of Soil Mechanics and Foundations Division*, 93(SM4), 499-528.
- 2196 Weeks, A. G. (1969). "The stability of natural slopes in south-east England as affected
 2197 by periglacial activity." *Quarterly Journal of Engineering Geology*, 2(1), 49-61.
- 2198 Wright, S. G. (2005). *Evaluation of soil shear strengths for slope and retaining wall*
 2199 *stability analyses with emphasis on high plasticity clays*. Center for
 2200 Transportation Research, University of Texas at Austin, 100.
 2201
- 2202 (g) Other possible topics
- 2203 Bishop, A. W. (1966). "The strength of soils as engineering materials."
 2204 *Geotechnique*, 16(2), 89-130.
- 2205 Bishop, A. W., Green, G. E., Garga, V. K., Andresen, A., and Brown, J. D. (1971).
 2206 "A new ring shear apparatus and its application to the measurement of
 2207 residual strength." *Géotechnique*, 21(4), 273-328.
- 2208 Brooker, E. (1967). "Strain energy and behaviour of overconsolidated soils."
 2209 *Canadian Geotechnical Journal*, 4(3), 326-333.
- 2210 Charles, J. A., and Watts, K. S. (1980). "The influence of confining pressure on
 2211 the shear strength of compacted rockfill." *Geotechnique*, 30(4), 353-367.
- 2212 Chandler, R. J. (1984a). "Recent European experience of landslides in
 2213 overconsolidated clays and soft rocks." *Proceedings of the 4th International*
 2214 *Symposium on Landslides*, Toronto, 61-81.
- 2215 Day, R. W. (1992b). "Effective cohesion for compacted clay." *Journal of Geotechnical*
 2216 *Engineering*, 118(4), 611-619.
- 2217 Day, R. W. (1994a). "Swell-shrink behavior of compacted clay." *Journal of*
 2218 *Geotechnical Engineering*, 120(3), 618-623.
- 2219 Duan, S., Nakagawa, K., and Sakaida, T. (1991). "A mathematical model to approach
 2220 the fracture process of overconsolidated clay." *Engineering Fracture*
 2221 *Mechanics*, 38(6), 361-369.
- 2222 Gourlay, A. W., and Wright, S. G. (1984). *Initial laboratory study of the shear strength*
 2223 *properties of compacted, highly plastic clays used for highway embankment*

- 2224 *construction in the area of Houston, Texas*. Center for Transportation
 2225 Research, University of Texas at Austin, 224.
- 2226 Green, R., and Wright, S. G. (1986). *Factors affecting the long term strength of*
 2227 *compacted Beaumont Clay*. Center for Transportation Research, University of
 2228 Texas at Austin, 222.
- 2229 Henkel, D. J., and Skempton, A. W. (1955). "A landslide at Jackfield, Shropshire, in a
 2230 heavily over-consolidated clay." *Géotechnique*, 5(2), 131-137.
- 2231 Insley, A. E. (1965). "A study of a large compacted clay embankment-fill failure."
 2232 *Canadian Geotechnical Journal*, 2(3), 274-286.
- 2233 Ladd, C. C. (1959). "Mechanism of swelling by compacted clays." *Water Tensions;*
 2234 *Swelling Mechanisms; Strength of Compacted Soil*. Highway Research Board
 2235 *Bulletin* 245, 10-26.
- 2236 Lovell, C. W., and Johnson, J. M. (1981). "Shearing behavior of compacted clay after
 2237 saturation." *Laboratory Shear Strength of Soil*. ASTM STP 740, R. N. Yong and
 2238 F. C. Townsend, eds., American Society for Testing and Materials, 277-293.
- 2239 McBrayer, M. C., Mauldon, M., Drumm, E. C., and Wilson, G. V. (1997). "Infiltration
 2240 tests on fractured compacted clay." *Journal of Geotechnical and*
 2241 *Geoenvironmental Engineering*, 123(5), 469-473.
- 2242 Palmer, A. C., and Rice, J. R. (1973). "The growth of slip surfaces in the progressive
 2243 failure of over-consolidated clay." *Proceedings of the Royal Society of London.*
 2244 *A Mathematical and Physical Sciences*, The Royal Society, 332(1591), 527-
 2245 548.
- 2246 Rao, S. M., and Revanasiddappa, K. (2000). "Role of matric suction in collapse of
 2247 compacted clay soil." *Journal of Geotechnical and Geoenvironmental*
 2248 *Engineering*, 126(1), 85-90.
- 2249 Rogers, L. E., and Wright, S. G. (1986). *The effects of wetting and drying on the long-*
 2250 *term shear strength parameters for compacted Beaumont Clay*. Center for
 2251 Transportation Research, University of Texas at Austin, 146.
- 2252 Seed, H. B., Mitchell, J. K., and Chan, C. K. (1960). "The strength of compacted
 2253 cohesive soils." *Research Conference on Shear Strength of Cohesive Soils*, ASCE,
 2254 Boulder, Colorado, 877-964.
- 2255 Singh, R., Henkel, D. J., and Sangrey, D. A. (1977). "Shear and Ko swelling of
 2256 overconsolidated clays." *Proceedings of the 9th International Conference on*
 2257 *Soil Mechanics and Foundation Engineering*, 367-376.
- 2258 Smith, R. E., Jahangir, M. A., and Rinker, W. C. (2006). "Selection of design strengths
 2259 for overconsolidated clays and clay shales." *40th Symposium on Engineering*
 2260 *Geology and Geotechnical Engineering*, 1-11.
- 2261 Tinjum, J. M., Benson, C. H., and Blotz, L. R. (1997). "Soil-water characteristic curves
 2262 for compacted clays." *Journal of Geotechnical and Geoenvironmental*
 2263 *Engineering*, 123(11), 1060-1069.
- 2264 Wang, X., and Benson, C. H. (1995). "Infiltration and saturated hydraulic
 2265 conductivity of compacted clay." *Journal of Geotechnical Engineering*,
 2266 121(10), 713-722.
- 2267 Yoshida, N., Morgenstern, N. R., and Chan, D. H. (1991b). "Finite-element analysis of
 2268 softening effects in fissured, overconsolidated clays and mudstones."
 2269 *Canadian Geotechnical Journal*, 28(1), 51-61

- 2270 Kayyal, M. K., and Wright, S. G. (1991). *Investigation of long-term properties of*
 2271 *Paris and Beaumont Clays in earth embankments*. Center for
 2272 Transportation Research, University of Texas at Austin, Austin, 134
- 2273 McCook, D. K. (1997). "Surficial slides in highly plastic clay embankments."
 2274 *Infrastructure Condition Assessment: Art, Science, and Practice*, ASCE,
 2275 227–236.
- 2276 Skempton, A. W. (1985). "Residual strength of clays in landslides, folded strata
 2277 and the laboratory." *Géotechnique*, 35(1), 3-18.
- 2278 Tiwari, B., and Ajmera, B. (2010). *A new correlation for shear strength of*
 2279 *reconstituted soil with proportions of clay minerals and plasticity*
 2280 *characteristics*. Fullerton, 88.
- 2281 Tiwari, B., and Ajmera, B.. (2011). "A new correlation relating the shear strength
 2282 of reconstituted soil to the proportions of clay minerals and plasticity
 2283 characteristics." *Applied Clay Science*, Elsevier B.V., 53(1), 48-57.
- 2284 United States Army Corps of Engineers (USACE) (1970). "Laboratory soils testing,
 2285 Engineer Manual 1110-2-1906," U.S. Army Corps of Engineers,
 2286 Washington, D.C.
- 2287 USACE (2000). "Design and construction of levees, Engineer Manual 1110-2-
 2288 1913," U.S. Army Corps of Engineers, Washington, DC.
- 2289 Wright, S. G., Zornberg, J. G., and Aguetant, J. E. (2007). "The fully softened
 2290 shear strength of high plasticity clays." Center for Transportation Research,
 2291 University of Texas at Austin.
- 2292 Aguetant, J. E. (2006). "The fully softened shear strength of high plasticity clays,"
 2293 Thesis submitted in partial fulfillment of the requirements for Master of
 2294 Science in Engineering, The University of Texas at Austin.
- 2295 Atkinson, J. H. and Farrar, D. M. (1985). "Stress path tests to measure soil
 2296 strength parameters for shallow landslips", *Proceedings of the Eleventh*
 2297 *International Conference on Soil Mechanics and Foundation Engineering*,
 2298 San Francisco, 1985, Vol. 2, 983-986.
- 2299 de Mello, V. F. B. (1977). "Reflections on design decisions of practical significance
 2300 to embankment dams," *Geotechnique*, Vol. 27, No. 3, 281-354.
- 2301 Kayyal, M. K., and Wright, S. G. (1991). *Investigation of long-term properties of*
 2302 *Paris and Beaumont Clays in earth embankments*. Center for
 2303 Transportation Research, University of Texas at Austin, Austin, 134.
- 2304 Maksimovic, M. (1989). "Nonlinear failure envelope for soils." *Journal of*
 2305 *Geotechnical Engineering*, 115(4), 581–586.
- 2306 Al-Homoud, A. S., Basma, A. A., and Al Bashabsheh, M. A. (1995). "Cyclic swelling
 2307 behavior of clays." *Journal of Geotechnical Engineering*, 121(7), 562-565.
- 2308 Albrecht, B. A., and Benson, C. H. (2001). "Effect of desiccation on compacted natural
 2309 clays." *Journal of Geotechnical and Geoenvironmental Engineering*, 127(1), 67-
 2310 75.

- 2311 Allred, B. J. (2000). "Survey of fractured glacial till geotechnical characteristics:
2312 Hydraulic conductivity, consolidation, and shear strength." *Ohio Journal of*
2313 *Science*, 100(3-4), 63-72.
- 2314 Asmaranto, R., Aryani, R. A., and Anwar, N. (2010). "Changes of soil erodibility due to
2315 wetting and drying cycle repetitions on the residual soil." *International*
2316 *Journal of Academic Research*, 2(5), 149-152.
- 2317 Baker, R. (2004). "Nonlinear Mohr envelopes based on triaxial data." *Journal of*
2318 *Geotechnical and Geoenvironmental Engineering*, 130(5), 498-506.
- 2319 Bell, D. O. N., and Wright, S. G. (1991). *Numerical modeling of the response of*
2320 *cylindrical specimens of clay to drying*. Center for Transportation Research,
2321 University of Texas at Austin, 48.
- 2322 Bishop, A. W., Green, G. E., Garga, V. K., Andresen, A., and Brown, J. D. (1971). "A new
2323 ring shear apparatus and its application to the measurement of residual
2324 strength." *Géotechnique*, 21(4), 273-328.
- 2325 Bishop, A. W., Webb, D. L., and Lewin, P. I. (1965). "Undisturbed samples of London
2326 Clay from the Ashford Common Shaft: Strength-effective stress
2327 relationships." *Géotechnique*, 15(1), 1-31.
- 2328 Bishop, A. W. (1966). "The strength of soils as engineering materials", *Géotechnique*,
2329 16(2), 89-130.
- 2330 Botts, M. E. (1998). "Effects of slaking on the strength of clay shales: A critical state
2331 approach." *Proceedings of the 2nd International Symposium on the*
2332 *Geotechnics of Hard Soils/Soft Rocks*, 1(October), 447-458.
- 2333 Burland, J. B. (1990). "On the compressibility and shear strength of natural clays."
2334 *Géotechnique*, 40(3), 329-378.
- 2335 Burland, J. B., Longworth, T. I., and Moore, J. F. A. (1977). "A study of ground
2336 movement and progressive failure caused by a deep excavation in Oxford
2337 Clay." *Géotechnique*, 27(4), 557-591.
- 2338 Cascini, L., Cuomo, S., Pastor, M., and Sorbino, G. (2010). "Modeling of rainfall-
2339 induced shallow landslides of the flow-type." *Journal of Geotechnical and*
2340 *Geoenvironmental Engineering*, 136(1), 85-98.
- 2341 Chandler, R. J. (1970). "A shallow slab slide in the Lias Clay near Uppingham,
2342 Rutland." *Géotechnique*, 20(3), 253-260.
- 2343 Chandler, R. J. (1972). "Lias Clay: Weathering process and their effect on shear
2344 strength." *Géotechnique*, 22(4), 403-431.
- 2345 .
- 2346 Chandler, R. J. (1984b). "Delayed failure and observed strength of first- time slides in
2347 stiff clays." *Proceedings of the 4th International Symposium on Landslides*,
2348 Toronto, 19-26.
- 2349 Chandler, R. J., Pachakis, M., Mercer, J., and Wrightman, J. (1973). "Four long-term
2350 failures of embankments founded on areas of landslip." *Quarterly Journal of*
2351 *Engineering Geology*, 6(3-4), 405-422.
- 2352 Chandler, R. J., and Apted, J. P. (1988). "The effect of weathering on the strength of
2353 London Clay." *Quarterly Journal of Engineering Geology*, 21, 59-68.
- 2354 Collins, B. D., and Znidarcic, D. (2004). "Stability analyses of rainfall induced
2355 landslides." *Journal of Geotechnical and Geoenvironmental Engineering*,
2356 130(4), 362-372.

2357 Cooling, L. F., and Skempton, A. W. (1942). "A laboratory study of London Clay."
2358 *Journal of the ICE*, 17(3), 251-276.

2359 Crawford, C. B., and Eden, W. J. (1965). "A comparison of laboratory results with in-
2360 situ properties of Leda Clay." *Proceedings of the 6th International Conference*
2361 *on Soil Mechanics and Foundations Engineering*, 1, 31-35.

2362 Eigenbrod, K. D., and Morgenstern, N. R. (1972). "A slide in cretaceous bedrock,
2363 Devon, Alberta." *Geotechnical Practice for Stability in Open Pit Mining*, 223-
2364 238.

2365 Ellis, E., and O'Brien, T. (2007). "Effect of height on delayed collapse of cuttings in
2366 stiff clay." *Proceedings of the Institution of Civil Engineers-Geotechnical*
2367 *engineering*, Telford, 160(2), 73-84.

2368 Fedaa, J., Bohac, J., and Herle, I. (1995). "Shear resistance of fissured Neogene clays."
2369 *Engineering Geology*, 39(3-4), 171-184.

2370 Fox, P. J., and Stark, T. D. (2004). "State-of-the-art report: GCL shear strength and its
2371 measurement." *Geosynthetics International*, 11(3), 141-175.

2372 Graham, J., and Au, V. C. S. (1985). "Effects of freeze-thaw and softening on a natural
2373 clay at low stresses." *Canadian Geotechnical Journal*, 22(1), 69-78.

2374 Graham, J., and Shields, D. H. (1985). "Influence of geology and geological processes
2375 on the geotechnical properties of a plastic clay." *Engineering Geology*,
2376 Elsevier, 22(2), 109-126.

2377 Gregory, C. H. (1844a). "On railway cuttings and embankments; with an account of
2378 some slips in the London Clay, on the line of the London and Croydon
2379 railway." *Minutes of the Proceedings*, 3, 135-145.

2380 Gregory, C. H. (1844b). "Discussion on railway cuttings and embankments; with an
2381 account of some slips in the London Clay, on the line of the London and
2382 Croydon railway." *Minutes of the Proceedings*, 3, 145-173.

2383 Griffiths, D. V., and Li, C. O. (1993). "Analysis of delayed failure in sloping
2384 excavations." *Journal of Geotechnical Engineering*, 119(9), 1360-1378.

2385 Guan, G. S., Rahardjo, H., and Choon, L. E. (2010). "Shear strength equations for
2386 unsaturated soil under drying and wetting." *Journal of Geotechnical and*
2387 *Geoenvironmental Engineering*, 136(4), 594-606.

2388 Henkel, D. J. (1956). "The effect of overconsolidation on the behaviour of clays
2389 during shear." *Géotechnique*, 6(4), 139-150.

2390 Henkel, D. J. (1960). "The shear strength of saturated remoulded clays." *Research*
2391 *Conference on Shear Strength of Cohesive Soils*, ASCE, Boulder, Colorado, 533-
2392 554.

2393 Hussain, M. (2010). "Analysis and behavior of preexisting landslides." PhD Thesis.
2394 University of Illinois.

2395 Hvorslev, M. J. (1936). "A ring shear apparatus for the determination of the shearing
2396 resistance and plastic flow of soils." *Proceedings of the 1st International*
2397 *Conference on Soil Mechanics and Foundations*, 2, 125-129.

2398 Hvorslev, M. J. (1939). "Torsion shear tests and their place in the determination of
2399 the shearing resistance of soils." *Proceedings of the American Society Testing*
2400 *Material*, 39, 999-1022.

- 2401 Hvorslev, M. J. (1969). *Physical properties of remolded cohesive soils. Translation 69-*
 2402 *5, U.S. Army Corps of Engineers Waterways Experiment Station, Vicksburg,*
 2403 *165.*
- 2404 Johnson, J. M., and Lovell, C. W. (1979). "The effect of laboratory compaction on the
 2405 shear behavior of a highly plastic clay after saturation and consolidation :
 2406 Interim report." *Joint Transportation Research Program. Paper 849,*
 2407 *<http://docs.lib.purdue.edu/jtrp/849/> (Jun. 30, 2011).*
- 2408 Kamai, T. (1998). "Monitoring the process of ground failure in repeated landslides
 2409 and associated stability assessments." *Engineering Geology, Elsevier, 50(1-2),*
 2410 *71-84.*
- 2411 Kaya, A. (2009). "Residual and fully softened strength evaluation of soils using
 2412 Artificial Neural Networks." *Geotechnical and Geological Engineering, 27(2),*
 2413 *281-288.*
- 2414 Kayyal, M. K., and Wright, S. G. (1991). *Investigation of long-term properties of Paris*
 2415 *and Beaumont Clays in earth embankments.* Center for Transportation
 2416 *Research, University of Texas at Austin, Austin, 134.*
- 2417 Kim, C., Snell, C., and Medley, E. (2004). "Shear strength of Franciscan complex
 2418 melange as calculated from back-analysis of a landslide." *5th International*
 2419 *Conference on Case Histories in Geotechnical Engineering, 8.*
- 2420 Kwan, D. (1971). "Observations of the failure of a vertical cut in clay at Welland,
 2421 Ontario." *Canadian Geotechnical Journal, 8(2), 283-298.*
- 2422 Lo, K. Y. (1970). "The operational strength of fissured clays." *Géotechnique, 20(1),*
 2423 *57-74.*
- 2424 Maksimovic, M. (1989). "Nonlinear failure envelope for soils." *Journal of*
 2425 *Geotechnical Engineering, 115(4), 581-586.*
- 2426 Marcotte, M., and Silvestri, V. (1982). "Shear strength of the weathered Champlain
 2427 clay measured in a large diameter triaxial test." *Canadian Geotechnical*
 2428 *Journal, 19(5), 413-420.*
- 2429 Marsland, A. (1971). "The shear strength of stiff fissured clays." *In Stress-strain*
 2430 *behavior of soils. Roscoe Memorial Symposium, Foulis, Henley-on-Thames, UK,*
 2431 *59-68.*
- 2432 Marsland, A., and Butler, M. E. (1967). "Strength measurements on stiff fissured
 2433 Barton Clay from Fawley (Hampshire)." *Proceedings of the Geotechnical*
 2434 *Conference Vol. 1, Building Research Station, Ministry of Public Building and*
 2435 *Works, Oslo, Norway, 139-145.*
- 2436 McCook, D. K. (1997). "Surficial slides in highly plastic clay embankments."
 2437 *Infrastructure Condition Assessment: Art, Science, and Practice, ASCE, 227-*
 2438 *236.*
- 2439 McGown, A., and Radwan, A. M. (1975). "The presence and influence of fissures in
 2440 the Boulder Clays of west central Scotland." *Canadian Geotechnical Journal,*
 2441 *12, 84-97.*
- 2442 McManis, K., and Arman, A. (1986). "Sampling and testing in stiff crustal clays."
 2443 *Geotechnical Aspects of Stiff and Hard Clays (GSP 2), ASCE, New York, New*
 2444 *York, 1-13.*
- 2445 Mesri, G., and Abdel-Ghaffar, M. E. M. (1993). "Cohesion intercept in effective stress-
 2446 stability analysis." *Journal of Geotechnical Engineering, 119(8), 1229-1249.*

- 2447 Mesri, G., and Cepeda-Diaz, F. (1986). "Residual shear strength of clays and shales."
 2448 *Géotechnique*, 36(2), 269-274.
- 2449 Mmoon, A. T. (1984). "Effective shear strength parameters for stiff fissured clays."
 2450 *4th Australia-New Zealand Conference on Geomechanics*, 107-111.
- 2451 Morgenstern, N. R., and Eigenbrod, K. D. (1972). "Seepage into an excavation in a
 2452 medium possessing stress-dependent permeability." *Proceedings of the*
 2453 *Symposium on Percolation through Fissured Rock*, 1-15.
- 2454 Morgenstern, N. R., and Eigenbrod, K. D. (1974). "Classification of argillaceous soils
 2455 and rocks." *Journal of the Geotechnical Engineering Division*, 100(10), 1137-
 2456 1156.
- 2457 Mullervonmoos, M., and Loken, T. (1989). "The shearing behaviour of clays." *Applied*
 2458 *Clay Science*, 4(2), 125-141.
- 2459 Nonveiller, E., and Suklje, L. (1955). "Landslide Zalesina." *Géotechnique*, 5(2), 143-
 2460 153.
- 2461 Noor, M. J. M., and Anderson, W. F. (2006). "A comprehensive shear strength model
 2462 for saturated and unsaturated soils." *Unsaturated Soils 2006 (GSP 147)*, ASCE,
 2463 1993-2003.
- 2464 Olson, R. E., and Mitronovas, F. (1960). "Shear strength and consolidation
 2465 characteristics of calcium and magnesium illite." *Symposium on the*
 2466 *Engineering Aspects of the Physico-Chemical Properties of Clays*, 185-209.
- 2467 Osipov, V. I., Bik, N. N., and Rumjantseva, N. A. (1987). "Cyclic swelling of clays."
 2468 *Applied Clay science*, 2(4), 363-374.
- 2469 Peterson, R., Jaspas, J. L., Rivard, P. J., and Iverson, N. L. (1960). "Limitations of
 2470 laboratory shear strength in evaluating stability of highly plastic clays."
 2471 *Research Conference on Shear Strength of Cohesive Soils*, ASCE, 765-791.
- 2472 Potts, D. M., Dounias, G. T., and Vaughan, P. R. (1987). "Finite element analysis of the
 2473 direct shear box test." *Geotechnique*, 37(1), 11-23.
- 2474 PRivard, P. J., and Lu, Y. (1978). "Shear strength of soft fissured clays." *Canadian*
 2475 *Geotechnical Journal*, 15(3), 382-390.
- 2476 Rowe, P. W. (1972). "The relevance of soil fabric to site investigation practice."
 2477 *Géotechnique*, 22(2), 195-300.
- 2478 Saada, A. S., Bianchini, G. F., and Liang, L. (1994). "Cracks, bifurcation and shear
 2479 bands propagation in saturated clays." *Géotechnique*, 44(1), 35-64.
- 2480 Sevaldson, R. A. (1956). "The slide in Lodalen, October 6th, 1954." *Géotechnique*,
 2481 6(4), 167-182.
- 2482 Skempton, A. W. (1945a). "A slip in the west bank of Eau Brink Cut." *Journal of the*
 2483 *ICE*, 24(7), 267-287.
- 2484 Skempton, A. W. (1945b). "Discussion of a Slip in the west bank of the Eau Brink
 2485 Cut." *Journal of the ICE*, 24(8), 535-553.
- 2486 Skempton, A. W. (1948). "The rate of softening in stiff fissured clays, with special
 2487 reference to London Clay." *Proceedings of the 2nd International Conference on*
 2488 *Soil Mechanics and Foundations Engineering*, 2, 50-53.
- 2489 Skempton, A. W. (1949). "A study of the geotechnical properties of some post-glacial
 2490 clays." *Géotechnique*, 1(1), 1-16.
- 2491 Skempton, A. W. (1970). "First-time slides in over-consolidated clays." *Géotechnique*,
 2492 20(3), 320-324.

- 2493 Skempton, A. W. (1985). "Residual strength of clays in landslides, folded strata and
2494 the laboratory." *Géotechnique*, 35(1), 3-18.
- 2495 Skempton, A. W., Petley, D. J., and Schuster, R. L. (1969). "Joints and fissures in the
2496 London Clay at Wraysbury and Edgware." *Géotechnique*, 19(2), 205-217.
- 2497 Skempton, A. W., Vaughan, P. R., Rocke, G., and Penman, A. D. M. (1994). "Discussion
2498 on the failure of Carsington Dam." *Géotechnique*, 44(4), 719-739.
- 2499 Skempton, A. W., and Brown, J. D. (1961). "A landslide in Boulder Clay at Selset,
2500 Yorkshire." *Géotechnique*, 11(4), 280-293.
- 2501 Skempton, A. W., and Henkel, D. J. (1957). "Tests on London Clay from deep borings
2502 at Paddington, Victoria and the south bank." *Proceedings of the 4th*
2503 *International Conference on Soil Mechanics and Foundation Engineering*, 1,
2504 100-106.
- 2505 Skempton, A. W., and Henkel, D. J. (1960). "Field observations on pore pressure in
2506 London Clay." *Conf. on Pore Pressure and Suction in soils*, 81-84.
- 2507 Skempton, A. W., and LaRochelle, P. (1965). "The Bradwell Slip: A short-term failure
2508 in London Clay." *Géotechnique*, 15(2), 221-242.
- 2509 Skempton, A. W., and Petley, D. J. (1967). "The strength along structural
2510 discontinuities in stiff clays." *Proceedings of the Geotechnical Conference*,
2511 Thomas Telford, Oslo, 29-46.
- 2512 Skempton, A. W., and Vaughan, P. R. (1993). "The failure of Carsington Dam."
2513 *Géotechnique*, 43(1), 151-173.
- 2514 Stark, T. D., and Duncan, J. M. (1991). "Mechanisms of strength loss in stiff clays."
2515 *Journal of Geotechnical Engineering*, 117(1), 139-154.
- 2516 Stark, T. D., and Eid, H. T. (1993). "Modified Bromhead ring shear apparatus."
2517 *Geotechnical Testing Journal*, 16(1), 100-107.
- 2518 Stark, T. D., and Eid, H. T. (1995). "Discussion of drained residual strength of
2519 cohesive Stark, T. D., and Hussain, M. (2010). "Shear strength in preexisting
2520 landslides." *Journal of Geotechnical and Geoenvironmental Engineering*,
2521 136(7), 957.
- 2522 Taha, M. R. (2009). "Geotechnical properties of soil-ball milled soil mixtures."
2523 *Nanotechnology in Construction 3*, Springer, 377-382.
- 2524 Terzaghi, K., Peck, R. B., and Mesri, G. (1996). *Soil mechanics in engineering practice*.
2525 Wiley-Interscience, 547.
- 2526 Thomson, S., and Morgenstern, N. R. (1979). "Landslides in argillaceous bedrock,
2527 Prairie Provinces, Canada." *Rock Slides and Avalanches: Vol.2*, 515-540.
- 2528 Thomson, S., and Tweedie, R. W. (1978). "The Edgerton Landslide." *Canadian*
2529 *Geotechnical Journal*, 15(4), 510-521.
- 2530 Tiwari, B., Brandon, T. L., Marui, H., and Tuladhar, G. R. (2005). "Comparison of
2531 residual shear strengths from back analysis and ring shear tests on
2532 undisturbed and remolded specimens." *Journal of Geotechnical and*
2533 *Geoenvironmental Engineering*, 131(9), 1071-1079.
- 2534 Tiwari, B., Tuladhar, G. R., and Marui, H. (2011). "Effect of shearing speed on residual
2535 shear strength of natural soil obtained from mudstone." *Geo-Frontiers 2011:*
2536 *Advances in Geotechnical Engineering*, 2786-2793.

2537 Tiwari, B., and Ajmera, B. (2010). *A new correlation for shear strength of*
2538 *reconstituted soil with proportions of clay minerals and plasticity*
2539 *characteristics*. Fullerton, 88.

2540 Tiwari, B., and Ajmera, B. (2011). "A new correlation relating the shear strength of
2541 reconstituted soil to the proportions of clay minerals and plasticity
2542 characteristics." *Applied Clay Science*, Elsevier B.V., 53(1), 48-57.

2543 Tiwari, B., and Marui, H. (2004). "Objective oriented multistage ring shear test for
2544 shear strength of landslide soil." *Journal of Geotechnical and*
2545 *Geoenvironmental Engineering*, 130(2), 217-222.

2546 Tiwari, B., and Marui, H. (2005). "A new method for the correlation of residual shear
2547 strength of the soil with mineralogical composition." *Journal of Geotechnical*
2548 *and Geoenvironmental Engineering*, 131(9), 1139-1150.

2549 Townsend, F. C., and Gilbert, P. A. (1974). "Preparation effects on clay shale
2550 classification indexes." *Proceedings of National Meeting on Water Resources*,
2551 ASCE, Los Angeles, CA, 1-30.

2552 Toyota, H., Nakamura, K., Sugimoto, M., and Sakai, N. (2009). "Ring shear tests to
2553 evaluate strength parameters in various remoulded soils." *Géotechnique*,
2554 59(8), 649-659.

2555 Ward, W. H., Butler, M. E., and Samuels, S. G. (1959). "Further studies of the
2556 properties of London Clay." *Géotechnique*, 9(2), 33-58.

2557 Watson, J. D. (1956a). "Earth movement affecting L.T.E. railway in deep cutting east
2558 of Uxbridge." *Proceedings of Engineering Divisions*, 5(5), 302-316.

2559 Watson, J. D. (1956b). "Discussion of earth movement affecting L.T.E. railway in
2560 deep cutting east of Uxbridge." *Proceedings of Engineering Divisions*, 5(5),
2561 316-331.

2562 Wright, S. G., Zornberg, J. G., and Aguetant, J. E. (2007). "The fully softened shear
2563 strength of high plasticity clays." Center for Transportation Research,
2564 University of Texas at Austin, 132.

2565 Wu, T. H., Randolph, B. W., and Huang, C. S. (1993). "Stability of shale
2566 embankments." *Journal of Geotechnical Engineering*, ASCE, 119(1), 127-146.

2567 Yoshida, N. (1991). "Time-dependent instability in fissured, over-consolidated clays
2568 and mudstones." Ph.D. Thesis, University of Alberta, Edmonton.

2569 Yoshida, N., Morgenstern, N. R., and Chan, D. H. (1990). "A failure criterion for stiff
2570 soils and rocks exhibiting softening." *Canadian Geotechnical Journal*, 27(2),
2571 195-202.

2572 Yoshida, N., Morgenstern, N. R., and Chan, D. H. (1991a). "Analysis of softening
2573 effects in mudstone and over-consolidated clays." *Soils and Foundations*,
2574 31(1), 121-130.

2575 Zornberg, J. G., Kuhn, J., and Wright, S. G. (2007). *Determination of field suction*
2576 *values, hydraulic properties, and shear strength in high PI clays*. Center for
2577 Transportation Research, University of Texas at Austin, 88.
2578
2579

2580

DRAFT